

### Description

Single, two and three pole magnetic and hydraulic-magnetic circuit breakers with trip-free mechanism and toggle actuation. A choice of fast magnetic only or hydraulically delayed switching characteristics (S-type MO or HM CBE to EN 60934) ensures suitability for a wide range of applications. Featuring a combi-foot design for symmetric rail mounting. Low temperature sensitivity at rated load. Approved to CBE standard EN 60934 (IEC 60934).

### Typical applications

Power supplies, control equipment, communication systems, EDP systems.

### Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance values (Ω) per pole |        |            |            |
|--------------------|---|--------|------------|------------|
|                    | F1                                      | F2     | K1, M1, T1 | K2, M2, T2 |
| 0,02               | 1 493                                   | 953    | 2 669      | 2 457      |
| 0,05               | 276                                     | 152    | 452        | 376        |
| 0,1                | 58                                      | 37     | 100        | 94         |
| 0,25               | 8,2                                     | 6,0    | 15,5       | 14,7       |
| 0,5                | 2,3                                     | 1,47   | 3,9        | 3,2        |
| 0,75               | 0,98                                    | 0,63   | 1,65       | 1,56       |
| 1                  | 0,58                                    | 0,35   | 0,95       | 0,90       |
| 2                  | 0,145                                   | 0,096  | 0,26       | 0,20       |
| 2,5                | 0,096                                   | 0,061  | 0,15       | 0,15       |
| 3                  | 0,065                                   | 0,048  | 0,10       | 0,10       |
| 5                  | 0,025                                   | < 0,02 | 0,042      | 0,040      |
| 6                  | < 0,02                                  | < 0,02 | 0,029      | 0,028      |
| 8                  | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 10                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 12                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 15                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 16                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 20                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 25                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 30                 | < 0,02                                  | < 0,02 | < 0,02     | < 0,02     |
| 40                 | < 0,01                                  | -      | < 0,01     | -          |
| 50                 | < 0,01                                  | -      | < 0,01     | -          |



single pole

8340-T...

three pole

### Technical data

For further details please see: [http://www.e-t-a.de/ti\\_e](http://www.e-t-a.de/ti_e)

|   |  |  |                 |
|---|--|--|-----------------|
| Voltage rating                                  | 3 AC 415V; AC 240V (50/60Hz); DC 80V (higher DC voltages to special order)   |  |                 |
| Current rating range                            | 0.02...50 A DC<br>0.02...30 A AC   |  |                 |
| Auxiliary circuit                               | 1 A, AC 240 V/DC 65 V; 0.5 A DC 80 V   |  |                 |
| Typical life                                    | 3 AC 415 V AC 240 V:<br>0.02...30 A 6,000 operations at 1 x I <sub>N</sub> , inductive<br>10,000 operations at 1 x I <sub>N</sub> , resistive<br>WDC 80 V: 0.02...25 A 6,000 operations at 1 x I <sub>N</sub> , inductive<br>0.02...30 A 10,000 operations at 1 x I <sub>N</sub> , resistive<br>40 + 50 A 6,000 operations at 1 x I <sub>N</sub> , resistive |  |                 |
| Ambient temperature                             | -40...+85 °C (-40...+185 °F)   |  |                 |
| Insulation co-ordination (IEC 60664 and 60664A) | rated impulse withstand voltage<br>2.5 kV<br>reinforced insulation in operating area   | pollution degree<br>2  |                 |
| Dielectric strength (IEC 60664 and 60664A)      | operating area<br>Line to Load<br>pole to pole (2- and 3-pole)<br>main to auxiliary circuit  | test voltage AC 3,000 V<br>test voltage AC 1,500 V<br>test voltage AC 1,500 V<br>test voltage AC 1,500 V |                 |
| Insulation resistance                           | > 100 MΩ (DC 500 V)  |  |                 |
| Interrupting capacity                           | 6 x IN at AC;<br>IEC 60934 - test sequence E 4 x IN at DC  |  |                 |
| Interrupting capacity (UL 1077)                 | I <sub>N</sub>   | 0.02...20 A  | 25...30 A       |
|   | AC:  | 1-pole AC 250 V/3,500A   | AC 250 V/3,500A |
|   |  | 2-pole AC 250 V/3,500A   | AC 250 V/5,000A |
|   |  | 3-pole 3AC 250V/3,500A   | 3AC250V/5,000A  |
|   | DC:  | 1-pole 0.02...50 A   | DC 80 V/3,500 A |
|   |  | 2-pole 0.02...30 A   | DC 80 V/3500 A  |
| Degree of protection (IEC 60529/DIN 40050)      | operating area IP40<br>terminal area IP20  |  |                 |
| Vibration                                       | with toggle down: 10 g at 0.9 I <sub>N</sub><br>directions 1, 2, 3, 4, 5: 10 g at 1 x I <sub>N</sub><br>with curves F1, F2: 10 g at 0.8 x I <sub>N</sub> in all planes.<br>(57-2000 Hz) ± 0.76 mm (10-57 Hz)<br>to IEC 60068-2-6, test Fc<br>10 frequency cycles/axis  |  |                 |
| Shock   | directions 1, 2, 3, 4, 5: 100 g (11 ms) at 1 x I <sub>N</sub><br>direction 6: 100 g (11 ms) at 0.8 x I <sub>N</sub><br>with curves F1, F2: 100 g (11 ms) at 0.8 x I <sub>N</sub><br>to IEC 60068-2-27, test Ea   |  |                 |
| Corrosion                                       | 96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka  |  |                 |
| Humidity  | 240 hours at 95 % RH, to IEC 60068-2-78, test Cab  |  |                 |
| Mass  | approx. 98 g per pole  |  |                 |

## Ordering information

|   |  |
|---|--|
| <b>Type No.</b>   |  |
| 8340  | circuit breaker with toggle actuator   |
| <b>Mounting</b>   |  |
| T   | rail mounting  |
| <b>Configuration</b>  |  |
| 1   | snap-on installation   |
| <b>Number of poles</b>  |  |
| 1   | single pole protected  |
| 2   | two pole protected   |
| 3   | three pole protected   |
|   | } magnetic, hydraulic-magnetic   |
| <b>Panel hardware</b>   |  |
| 0   | without panel hardware   |
| <b>Terminal design (main contact)</b>                                   |  |
| K1  | recessed screw/pressure plates M4  |
| <b>Characteristic curve *)</b>  |  |
| <b>Characteristic curve, instantaneous:</b>                             |  |
| F1  | DC   |
| F2  | AC 50/60 Hz  |
| <b>Short delay:</b>   |  |
| K1  | DC   |
| K2  | AC 50/60 Hz  |
| <b>Medium delay:</b>  |  |
| M1  | DC   |
| M2  | AC 50/60 Hz  |
| <b>Long delay:</b>  |  |
| T1  | DC   |
| T2  | AC 50/60 Hz  |
| <b>Actuator colour / design</b>   |  |
| A   | black, long toggle   |
| K   | black, short toggle  |
| <b>Marking on actuator</b>  |  |
| 0   | without marking  |
| L   | I-O; ON-OFF  |
| M   | I-O; ON-OFF (I <sub>N</sub> , U <sub>N</sub> , trip curve, schematic diagram on housing top) |
| N   | I-O; ON-OFF (I <sub>N</sub> , on housing top)  |
| <b>Auxiliary contacts</b>   |  |
| H0  | without auxiliary contacts   |
| H1  | with auxiliary contact   |
| H2  | with auxiliary contact on one pole only (multipole)  |
| <b>Auxiliary contact function</b><br>(see internal connection diagrams) |  |
| 2   | 1 N/O contact  |
| 3   | 1 N/C contact  |
| <b>Auxiliary contact terminal design</b>                                |  |
| 6   | screw/pressure plate M3  |
| <b>Current ratings</b>  |  |
| 0.02...50 A   |  |
| 8340 - T 1 1 0 - K1 M1 - A L H1 2 6 - 10 A ordering example             |  |

## Approvals

| Authority                          | Standard       | Rated voltage                                     | Current ratings   |
|------------------------------------|----------------|---|---|
| VDE                                | IEC / EN 60934 | AC 240/415 V<br>AC 240 V<br>DC 80 V               | 0.02 A...30 A<br>0.02 A...30 A<br>0.02 A...50 A   |
| UL                                 | UL 1077        | AC 250 V<br>DC 80 V<br>DC 80 V                    | 0.02 A...30 A<br>0.02 A...50 A<br>100 A (2 poles in parallel)                                       |
| UL                                 | UL 489A        | DC 80 V   | 0.05 A...30 A (1 + 2 pole)  |
| CSA                                | C22.2 No 235   | AC 250 V<br>DC 80 V                               | 0.02 A...30 A<br>0.02 A...30 A  |
| CQC                                | GB 17701       | AC 240/415 V<br>AC 240 V<br>DC 80 V               | 0.02 A...30 A<br>0.02 A...30 A<br>0.02 A...50 A   |
| QPL Sweden Defence Material Admin. | MIL-C-55629    | AC 240 V<br>DC 50 V<br>AC 240 V<br>AC 240 / 415 V | 1 A...30 A (8340-F410)<br>1 A...30 A (8340-410)<br>1 A...30 A (8340-F420)<br>1 A...30 A (8340-F430) |



This is a metric design and millimeter dimensions take precedence ( $\frac{mm}{inch}$ )

\*) Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads)


Please be informed that we have minimum ordering quantities to be observed.

**Dimensions**


**long toggle**

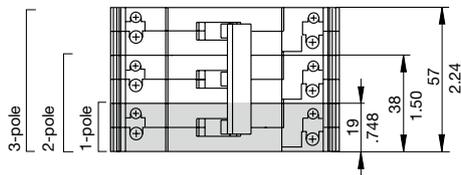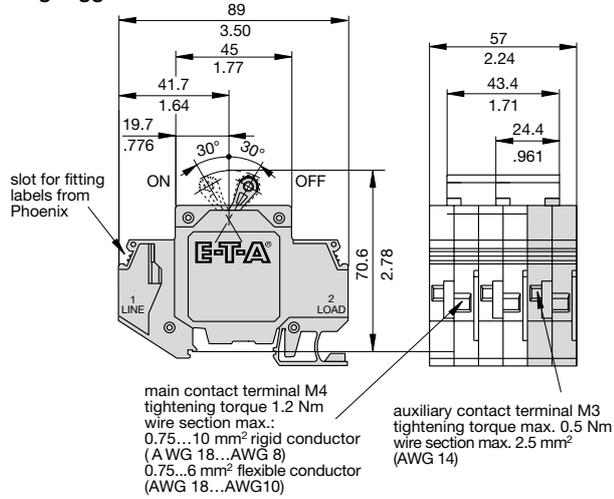

**short toggle**

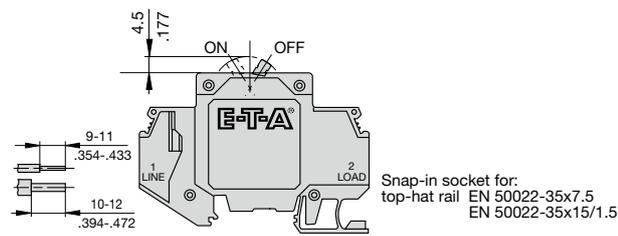


**Installation drawing**

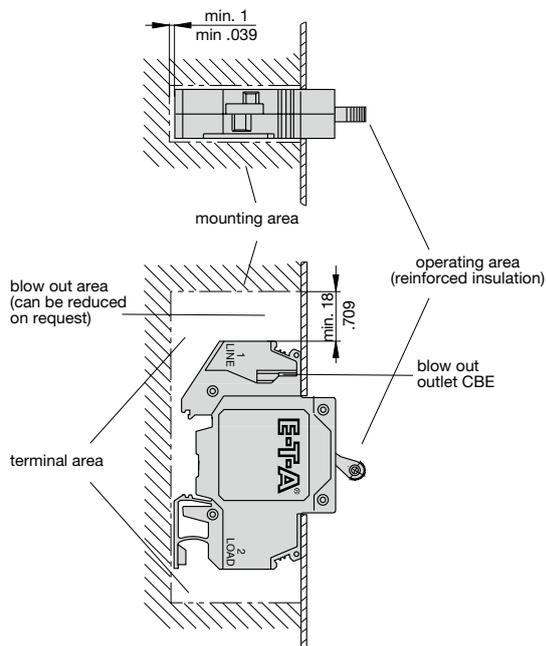


**Internal connection diagrams**


**1-pole protected magnetically**



**multipole**

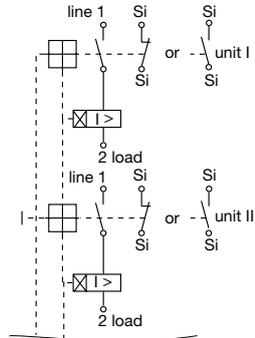


**1-pole protected hydraulic-magnetically**




Optional N/C or N/O auxiliary contact (Si)

**Shock directions**

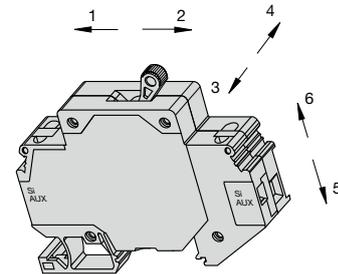


Typical time/current characteristics at 23 °C / +73.4 °F


**Curve F1 (instantaneous) for DC**

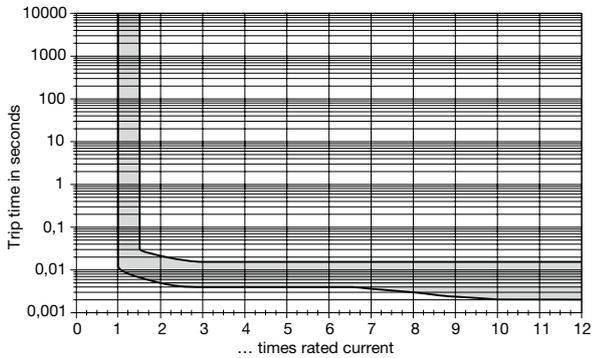


**Curve F2 (instantaneous) for AC**

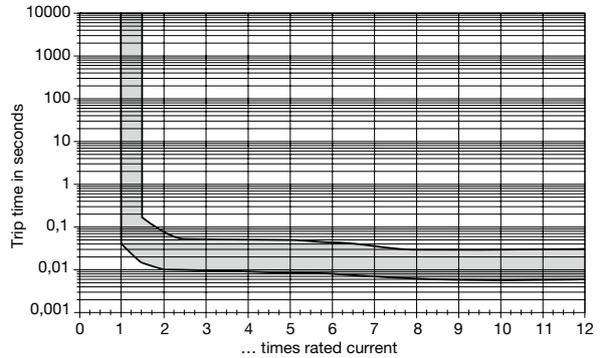


**Curve K1 (short delay) for DC**

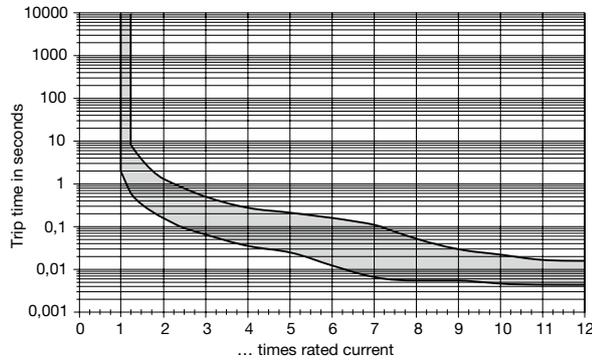


**Curve K2 (short delay) for AC 50/60 Hz**

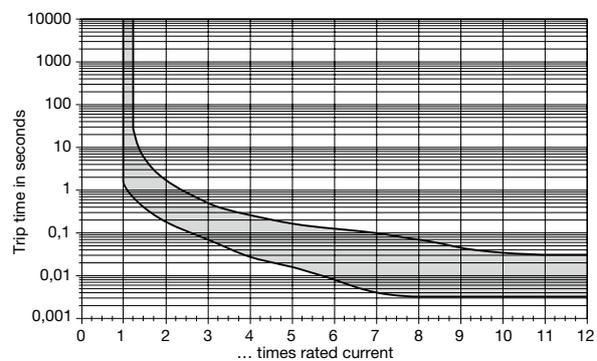


**Curve M1 (medium delay) for DC**

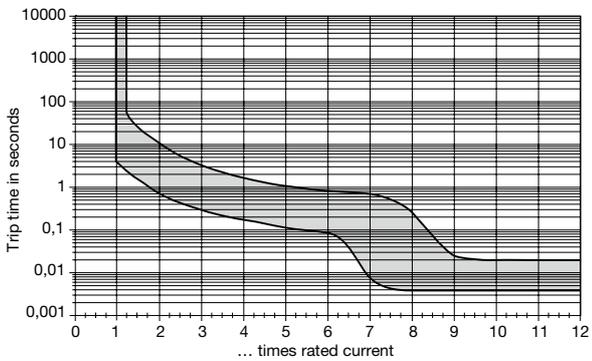


**Curve M2 (medium delay) for AC 50/60 Hz**

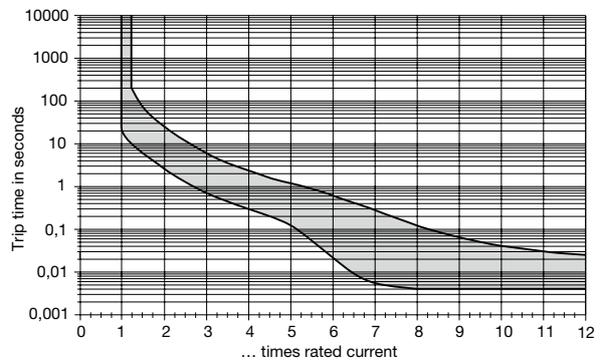

**Curve T1 (long delay) for DC**

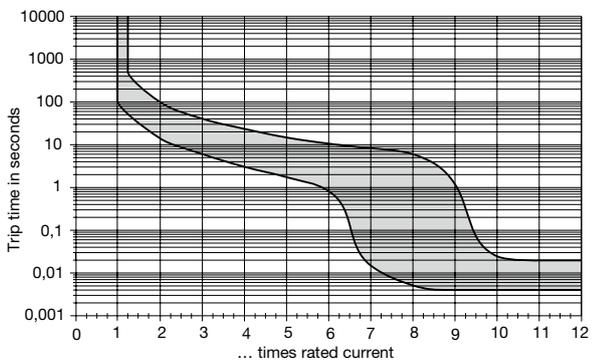

**Curve T2 (long delay) for AC 50/60 Hz**

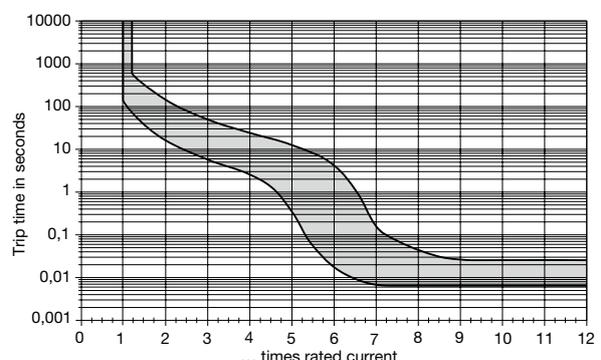


**N.B.** All curves will only be maintained if the escutcheon is mounted on a vertical surface. Ambient temperature or mounting side-by-side does not influence the trip curve, derating is not required. The breakers may trip in the event of current peaks < 0.003 sec. For these applications we offer a mechanical pulse delay – please enquire.  
**Other characteristic curves upon request (e.g. pulse delayed, for high inrush currents or capacitive loads).**

**Accessories**

**Connector bus links -K10**



**X210 589 01**/2.5 mm<sup>2</sup>, (AWG 14) (black) up to 20 A max. load  
**X210 589 02**/1.5 mm<sup>2</sup>, (AWG 16) (brown) up to 13 A max. load

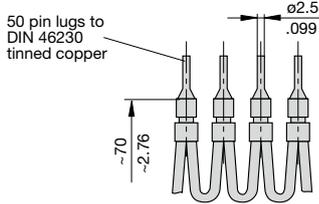

**Busbar 1-pole**  
**Y 308 495 01**

The one metre long busbars can be cut to suitable lengths. Plug-on caps can be fitted on the ends to provide brush contact protection.

I<sub>max</sub> - busbar 100 A (40 °C)


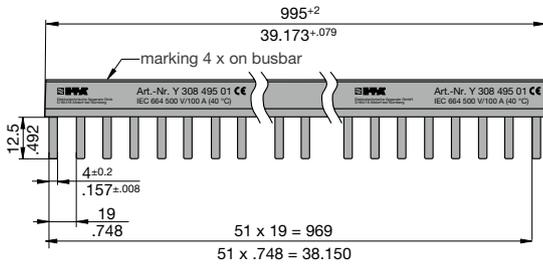


**Plug-on cap, 1-pole**  
**Y 307 851 01**



**Busbar 2-pole**  
**Y 308 496 01**

I<sub>max</sub> - busbar 100 A (40 °C)


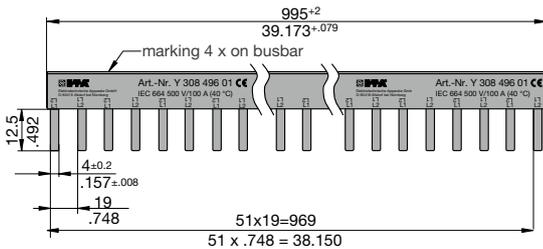


**Plug-on cap, busbar 2/3-pole**  
**Y 308 506 01**




**Busbar 3-pole**  
**Y 308 497 01**

I<sub>max</sub> - busbar 100 A (40 °C)

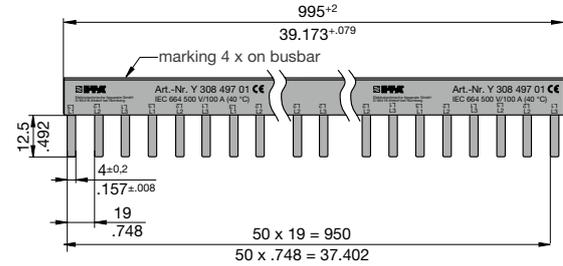



**Plug-on cap, busbar 2/3-pole**  
**Y 308 506 01**



**Supply terminal I<sub>max</sub> 63 A**

**Y 308 504 01**

Max. tightening torque of terminal screw 2 Nm  
 Max. cable cross section: 25 mm<sup>2</sup> / single strand  
 16 mm<sup>2</sup> / multistrand with wire end ferrule

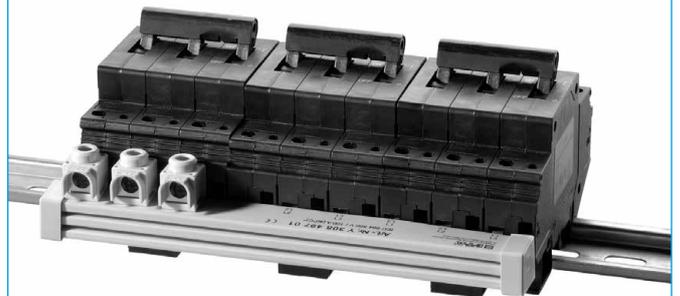

**Caution:**

When using multipole busbars please leave at least one pole's width between two adjacent line entry terminals.

This is a metric design and millimeter dimensions take precedence (mm / inch)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.





Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)