

### MG12200D-BA1MM




#### Features

- Ultra low loss
- High ruggedness
- High short circuit capability
- Positive temperature coefficient
- With fast free-wheeling diodes

#### Applications

- Inverter
- Converter
- Welder
- SMPS and UPS
- Induction heating

#### Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E71639

#### Module Characteristics ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Unit
$R_{thJC}$	Junction-to-Case Thermal Resistance	Per IGBT			0.09	K/W
$R_{thJD}$		Per Inverse Diode			0.22	K/W
Torque	Module-to-Sink	Recommended (M6)	3		5	N-m
Torque	Module Electrodes	Recommended (M6)	2.5		5	N-m
Weight				285		g

#### Absolute Maximum Ratings ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameters	Test Conditions	Values	Unit
<b>IGBT</b>				
$V_{CES}$	Collector - Emitter Voltage		1200	V
$V_{GES}$	Gate - Emitter Voltage		$\pm 20$	V
$I_c$	DC Collector Current	$T_c=25^\circ\text{C}$	300	A
		$T_c=80^\circ\text{C}$	210	A
$I_{cpuls}$	Pulsed Collector Current	$T_c=25^\circ\text{C}, t_p=1\text{ms}$	600	A
		$T_c=80^\circ\text{C}, t_p=1\text{ms}$	420	
$P_{tot}$	Power Dissipation Per IGBT		1400	W
$T_J$	Junction Temperature Range		-40 to +150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range		-40 to +125	$^\circ\text{C}$
$V_{isol}$	Insulation Test Voltage	AC, $t=1\text{min}$	3000	V
<b>Diode</b>				
$V_{RRM}$	Repetitive Reverse Voltage		1200	V
$I_{F(AV)}$	Average Forward Current	$T_c=25^\circ\text{C}$	250	A
		$T_c=80^\circ\text{C}$	170	A
$I_{F(RMS)}$	RMS Forward Current		250	A
$I_{FSM}$	Non-Repetitive Surge Forward Current	$T_J=45^\circ\text{C}, t=10\text{ms}, \text{Sine}$	1860	A
		$T_J=45^\circ\text{C}, t=8.3\text{ms}, \text{Sine}$	1920	

Life Support Note:

#### Not Intended for Use in Life Support or Life Saving Applications


The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

MG12200D-BA1MM


### Electrical and Thermal Specifications ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Typ	Max	Unit	
<b>IGBT</b>							
$V_{GE(th)}$	Gate - Emitter Threshold Voltage	$V_{CE}=V_{GE}, I_C=8\text{mA}$	5.0	6.2	7.0	V	
$V_{CE(sat)}$	Collector - Emitter Saturation Voltage	$I_C=200\text{A}, V_{GE}=15\text{V}, T_J=25^\circ\text{C}$		1.8		V	
		$I_C=200\text{A}, V_{GE}=15\text{V}, T_J=125^\circ\text{C}$		2.0		V	
$I_{CES}$	Collector Leakage Current	$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		0.4	1.0	mA	
		$V_{CE}=1200\text{V}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		6.0		mA	
$I_{GES}$	Gate Leakage Current	$V_{CE}=0\text{V}, V_{GE}=\pm 20\text{V}$	-400		400	nA	
$Q_{ge}$	Gate Charge	$V_{CC}=600\text{V}, I_C=200\text{A}, V_{GE}=\pm 15\text{V}$		2100		nC	
$C_{ies}$	Input Capacitance	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		14.9		nF	
$C_{oes}$	Output Capacitance			1.04			
$C_{res}$	Reverse Transfer Capacitance			0.7			
$t_{d(on)}$	Turn - on Delay Time	$V_{CC}=600\text{V}$ $I_C=200\text{A}$ $R_G=5\Omega$ $V_{GE}=\pm 15\text{V}$ Inductive Load	$T_J=25^\circ\text{C}$		125		ns
			$T_J=125^\circ\text{C}$		135		ns
$t_r$	Rise Time		$T_J=25^\circ\text{C}$		60		ns
			$T_J=125^\circ\text{C}$		60		ns
$t_{d(off)}$	Turn - off Delay Time		$T_J=25^\circ\text{C}$		420		ns
			$T_J=125^\circ\text{C}$		490		ns
$t_f$	Fall Time		$T_J=25^\circ\text{C}$		60		ns
			$T_J=125^\circ\text{C}$		75		ns
$E_{on}$	Turn - on Energy		$T_J=25^\circ\text{C}$		17		mJ
			$T_J=125^\circ\text{C}$		24.8		mJ
$E_{off}$	Turn - off Energy	$T_J=25^\circ\text{C}$		13.6		mJ	
		$T_J=125^\circ\text{C}$		21.6		mJ	
<b>Diode</b>							
$V_F$	Forward Voltage	$I_F=200\text{A}, V_{GE}=0\text{V}, T_J=25^\circ\text{C}$		2.0	2.44	V	
		$I_F=200\text{A}, V_{GE}=0\text{V}, T_J=125^\circ\text{C}$		1.7	2.20	V	
$t_{rr}$	Reverse Recovery Time	$I_F=200\text{A}, V_R=800\text{V}$ $di_F/dt=-1000\text{A}/\mu\text{s}$ $T_J=125^\circ\text{C}$		260		ns	
$I_{RRM}$	Max. Reverse Recovery Current			110		A	
$Q_{rr}$	Reverse Recovery Charge			13.5		$\mu\text{C}$	


**Figure 1: Typical Output Characteristics**

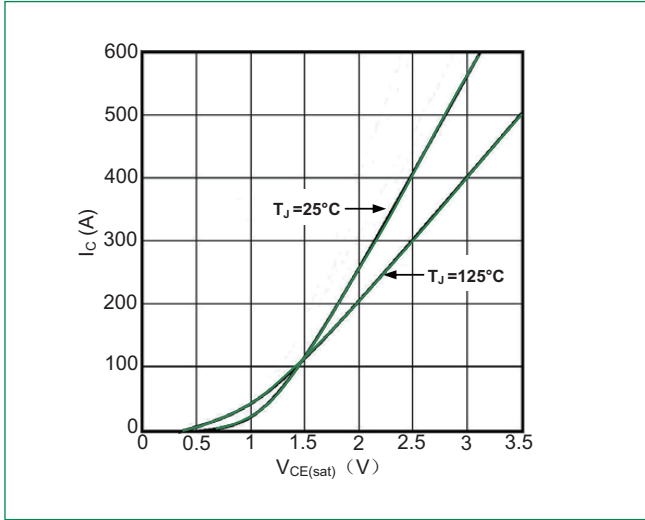


**Figure 2: Typical Transfer characteristics**

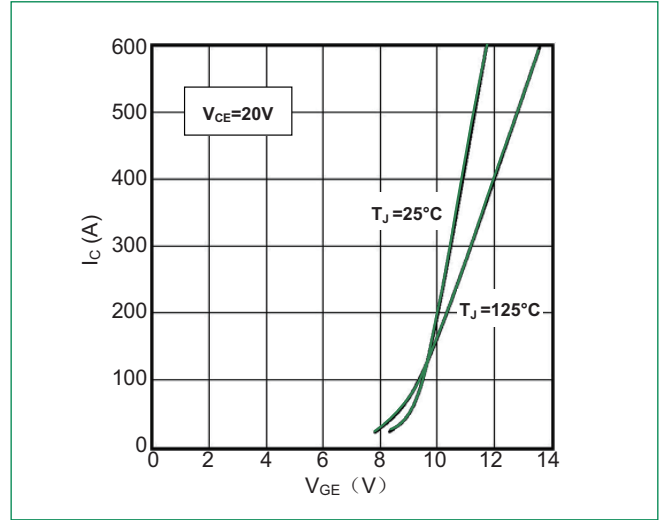


**Figure 3: Switching Energy vs. Collector Current**

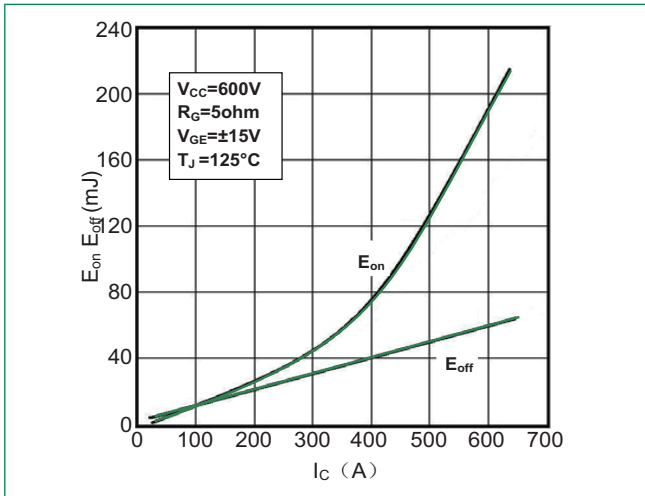


**Figure 4: Switching Energy vs. Gate Resistor**

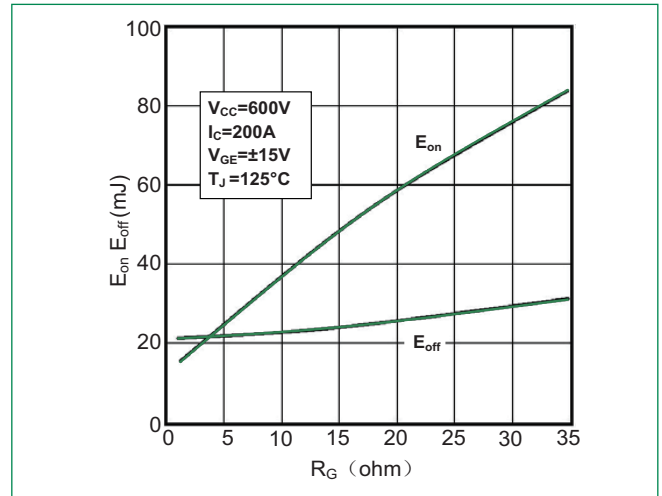


**Figure 5: Switching Times vs. Collector Current**

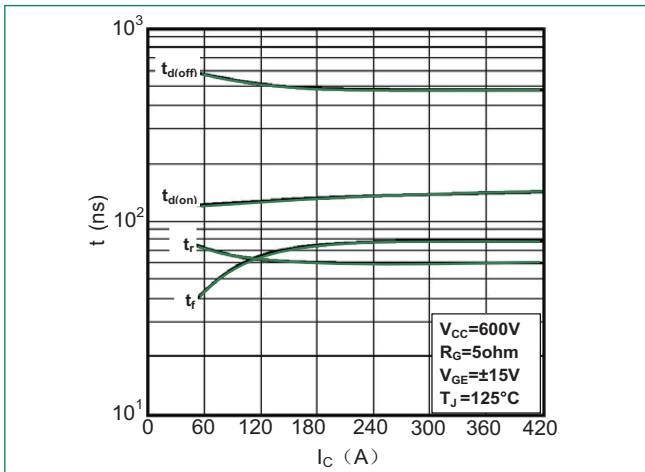


**Figure 6: Switching Times vs. Gate Resistor**

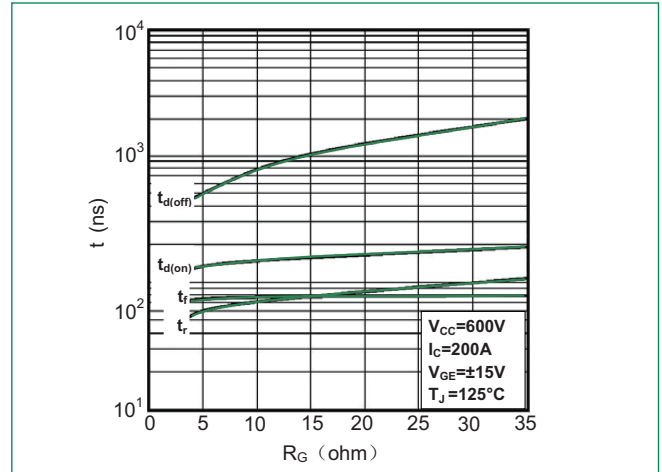


**Figure 7: Gate Charge characteristics**

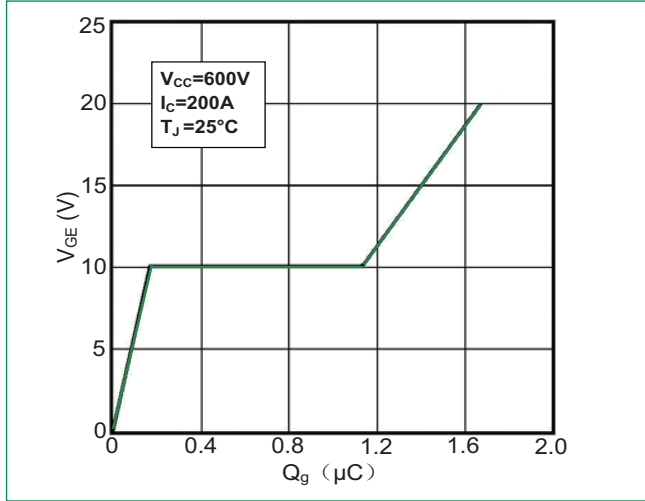


**Figure 8: Typical Capacitances vs.  $V_{CE}$**

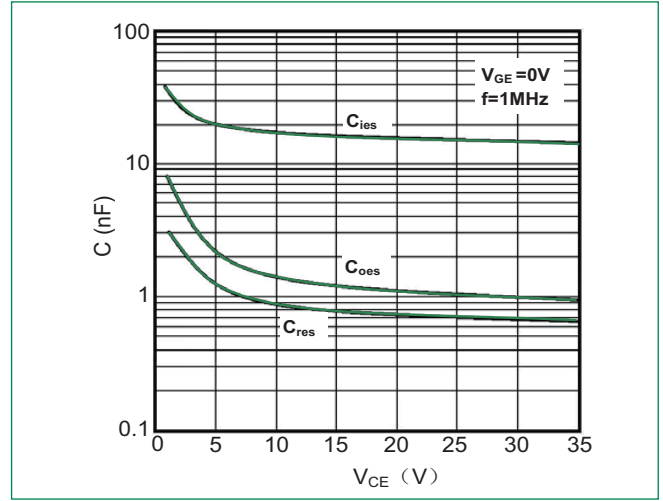


**Figure 9: Reverse Biased Safe Operating Area**

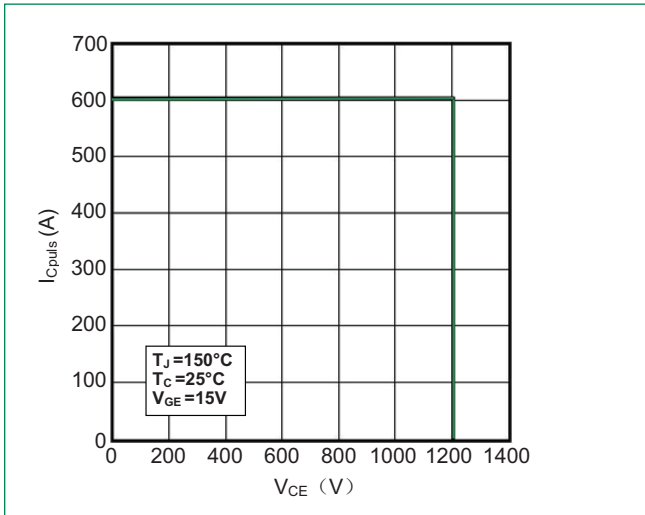


**Figure 10: Short Circuit Safe Operating Area**

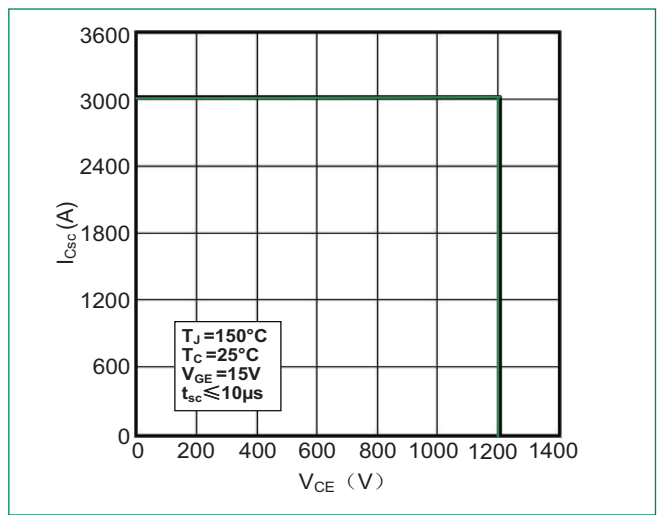


**Figure 11: Rated Current vs.  $T_C$**

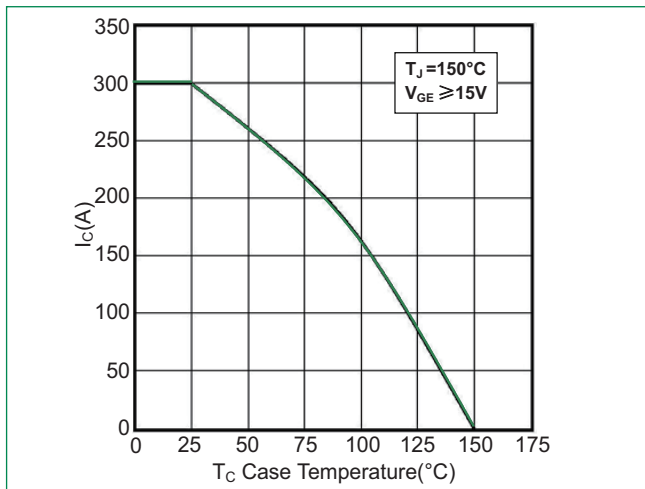


**Figure 12: Diode Forward Characteristics**

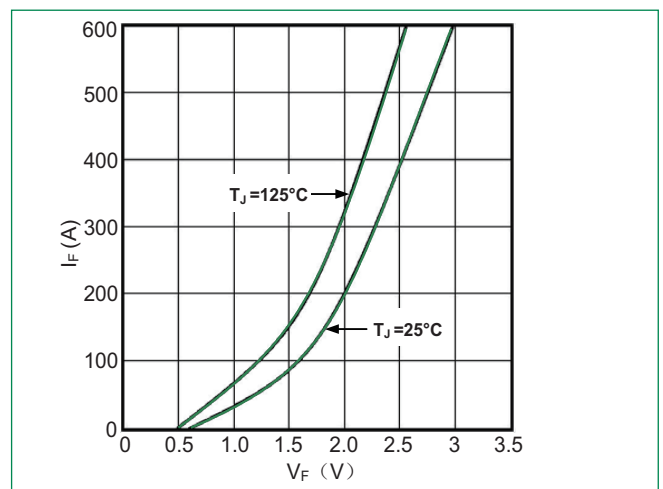


**Figure 13: Transient Thermal Impedance of IGBT**

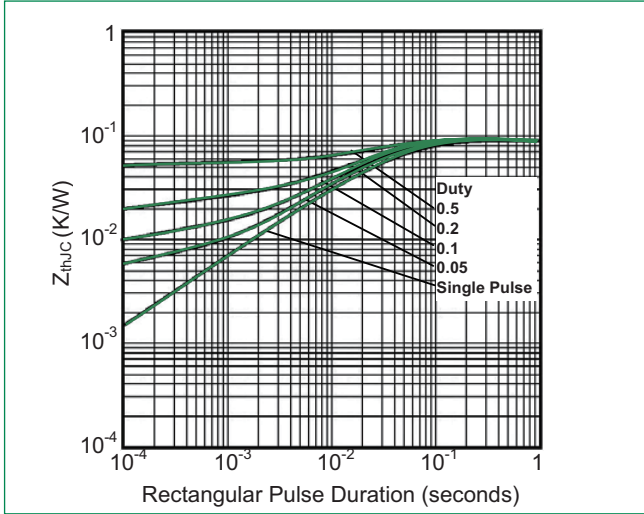


**Figure 14: Transient Thermal Impedance of Diode**

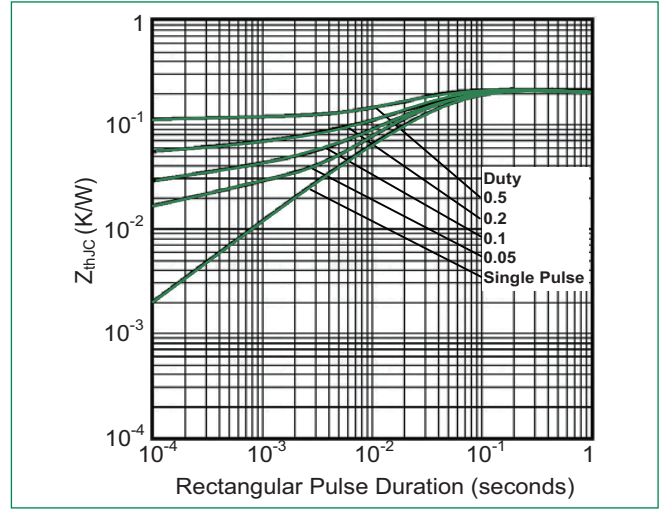

**Dimensions-Package D**

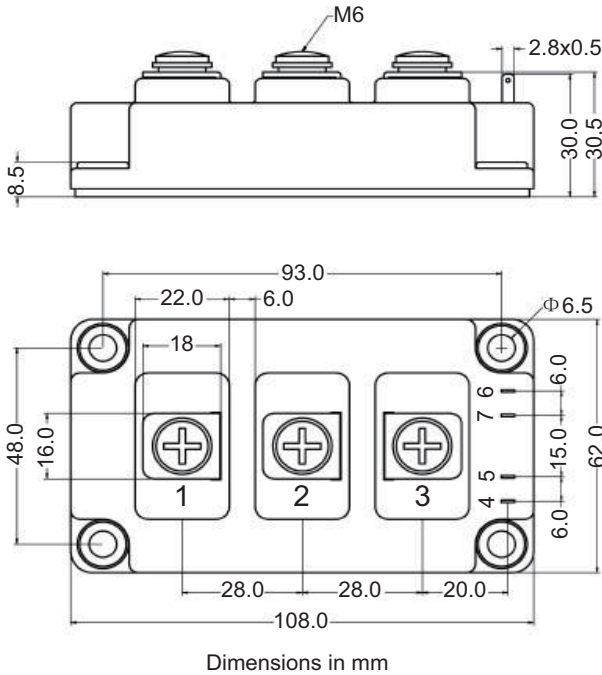


**Circuit Diagram**

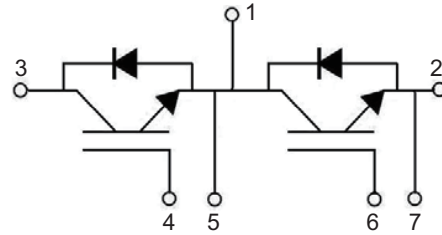


### Packing Options

Part Number	Marking	Weight	Packing Mode	M.O.Q
MG12200D-BA1MM	MG12200D-BA1MM	285g	Bulk Pack	60

### Part Numbering System

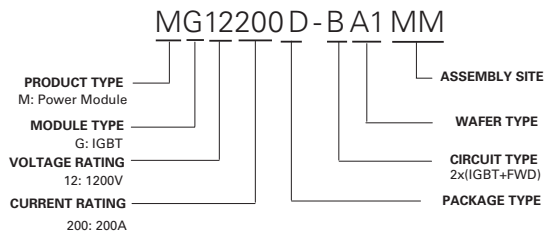

### Part Marking System

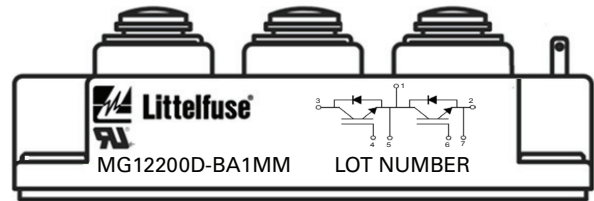

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)