

## Automation Transformers - Non-Ventilated 50 VA to 45 kVA

SolaHD encapsulated transformers are rated for Hazardous Locations as well as harsh industrial environments. Encapsulation and rugged UL Listed/NEMA Type 3R enclosures protect the transformer from dust, moisture, and provide extra shock and vibration resistance. SolaHD transformers fully comply with the latest addition of the National Electrical Code for Class I, Division 2, Group A, B, C and D locations when installed in compliance with NEC 501.100 (B).

### Features

#### Single Phase: .05 – .250 kVA

- UL Listed/NEMA Type 3R non encapsulated enclosure for indoor and outdoor service
- Low temperature rise, UL Class 130°C insulation system, 80°C temperature rise under full load
- Conduit knockouts for side entry into wiring compartment
- Copper lead wire terminations

#### Single Phase: 0.500 – 25 kVA

#### Three Phase: 3 – 45 kVA

- UL Listed/NEMA Type 3R encapsulated enclosure for indoor and outdoor service
- Electrostatically shielded for quality power on sizes 1 kVA and larger
- UL Class 200°C insulation system, 115°C temperature rise under full load
- Conduit knockouts for side entry into wiring compartment
- Copper lead wire terminations
- .500 - 45 kVA units are encapsulated with electrical grade silica and epoxy for industrial applications

### Related Products

- Some SolaHD DC power supplies are available with Class I, Division 2 ratings or encapsulation.
- Surge Protective Devices

### Certifications and Compliances

-  Listed: E25872, E77014
  - UL 1561 or UL 506
  - CSA C22.2 No. 47 or No. 66



### Accessories and Optional Design Styles

- Stainless Steel Enclosures
- Copper Wound designs
- UL Listed/NEMA Type 4, 4X or 12 Encapsulated Enclosures
- Low temperature designs available

Note: Weights and dimensions may change and should not be used for construction purposes.

## Selection Table: Single Phase

### Group 1: 240 x 480 Primary, 120/240 Secondary, 60 Hz

| kVA                     | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-------------------------|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|----------------|-------------|--------------|----------------|
| <b>Non-Encapsulated</b> |                                     |                                         |                |               |               |                              |                |             |              |                |
| .050                    | <b>HS1B50</b>                       | <b>N/A</b>                              | 6.00 (152.4)   | 4.00 (101.6)  | 3.00 (76.2)   | 3.00 (1.36)                  | 2              | 15          | .208/.104    | 0.416/0.208    |
| .075                    | <b>HS1B75</b>                       |                                         | 6.00 (152.4)   | 4.00 (101.6)  | 3.00 (76.2)   | 3.00 (1.36)                  | 2              | 15          | .312/.156    | 0.625/0.312    |
| .100                    | <b>HS1B100</b>                      |                                         | 6.00 (152.4)   | 4.00 (101.6)  | 3.00 (76.2)   | 4.00 (1.81)                  | 2              | 15          | .417/.208    | 0.833/0.417    |
| .150                    | <b>HS1B150</b>                      |                                         | 8.00 (203.2)   | 4.00 (101.6)  | 4.00 (101.6)  | 5.00 (2.27)                  | 2              | 15          | .625/.313    | 1.25/.625      |
| .250                    | <b>HS1B250</b>                      |                                         | 8.00 (203.2)   | 4.00 (101.6)  | 4.00 (101.6)  | 8.00 (3.63)                  | 2              | 15          | 1.04/.512    | 2.08/1.04      |
| <b>Encapsulated</b>     |                                     |                                         |                |               |               |                              |                |             |              |                |
| 0.5                     | <b>HS1F500B</b>                     | <b>HSS1F500B</b>                        | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 22.0 (9.98)                  | 3              | 15          | 2.08/1.04    | 4.16/2.08      |
| 0.75                    | <b>HS1F750B</b>                     | <b>HSS1F750B</b>                        | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 27.0 (12.25)                 | 3              | 15          | 3.13/1.56    | 6.25/3.13      |
| 1                       | <b>HS1F1BS</b>                      | <b>HSS1F1BS</b>                         | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 28.0 (12.70)                 | 3              | 16          | 4.17/2.08    | 8.33/4.17      |
| 1.5                     | <b>HS1F1.5AS</b>                    | <b>HSS1F1.5AS</b>                       | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 38.0 (17.24)                 | 4              | 16          | 6.25/3.13    | 12.5/6.25      |
| 2                       | <b>HS1F2AS</b>                      | <b>HSS1F2AS</b>                         | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 45.0 (20.42)                 | 4              | 16          | 8.33/4.17    | 16.7/8.33      |
| 3                       | <b>HS5F3AS</b>                      | <b>HSS5F3AS</b>                         | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 55.0 (24.95)                 | 4              | 17          | 12.5/6.25    | 25.0/12.5      |
| 5                       | <b>HS5F5AS</b>                      | <b>HSS5F5AS</b>                         | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 131.0 (59.42)                | 4              | 17          | 20.8/10.4    | 41.6/20.8      |
| 7.5                     | <b>HS5F7.5AS</b>                    | <b>HSS5F7.5AS</b>                       | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 156.0 (70.76)                | 4              | 18          | 31.3/15.6    | 62.5/31.3      |
| 10                      | <b>HS5F10AS</b>                     | <b>HSS5F10AS</b>                        | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 156.0 (70.76)                | 4              | 18          | 41.7/20.8    | 83.3/41.7      |
| 15                      | <b>HS5F15AS</b>                     | <b>HSS5F15AS</b>                        | 30.00 (762.0)  | 29.00 (736.6) | 12.00 (304.8) | 549.0 (249.02)               | 4              | 18          | 62.5/31.2    | 125.0/62.5     |
| 25                      | <b>HS5F25AS</b>                     | <b>HSS5F25AS</b>                        | 30.00 (762.0)  | 29.00 (736.6) | 12.00 (304.8) | 637.0 (288.94)               | 4              | 18          | 104.0/52.0   | 208.0/104.0    |

### Group 2: 600 Volt Primary, 120/240 Secondary, 60 Hz

| kVA                     | Catalog Number Group 1 Rolled Steel | Catalog Number Group 2 Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-------------------------|-------------------------------------|----------------------------------------|----------------|---------------|---------------|------------------------------|----------------|-------------|--------------|----------------|
| <b>Non-Encapsulated</b> |                                     |                                        |                |               |               |                              |                |             |              |                |
| .100                    | <b>HS10B100</b>                     | <b>N/A</b>                             | 6.00 (152.4)   | 4.00 (101.6)  | 3.00 (76.2)   | 4.00 (1.81)                  | 2              | 21          | 0.167        | .833/.417      |
| .150                    | <b>HS10B150</b>                     |                                        | 8.00 (203.2)   | 4.00 (101.6)  | 4.00 (101.6)  | 5.00 (2.27)                  | 2              | 21          | 0.25         | 1.25/.625      |
| .250                    | <b>HS10B250</b>                     |                                        | 8.00 (203.2)   | 4.00 (101.6)  | 4.00 (101.6)  | 8.00 (3.63)                  | 2              | 21          | 0.417        | 2.08/1.04      |
| <b>Encapsulated</b>     |                                     |                                        |                |               |               |                              |                |             |              |                |
| .500                    | <b>HS10F500B</b>                    | <b>HSS10F500B</b>                      | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 22.0 (9.98)                  | 3              | 21          | 0.833        | 4.16/2.08      |
| .750                    | <b>HS10F750B</b>                    | <b>HSS10F750B</b>                      | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 23.0 (10.43)                 | 3              | 21          | 1.25         | 6.25/3.13      |
| 1                       | <b>HS10F1BS</b>                     | <b>HSS10F1BS</b>                       | 10.00 (254.0)  | 6.00 (152.4)  | 5.00 (127.0)  | 28.0 (12.70)                 | 3              | 21          | 1.67         | 8.33/4.17      |
| 1.5                     | <b>HS10F1.5AS</b>                   | <b>HSS10F1.5AS</b>                     | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 38.0 (17.24)                 | 4              | 21          | 2.5          | 12.5/6.25      |
| 2                       | <b>HS10F2AS</b>                     | <b>HSS10F2AS</b>                       | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 60.0 (27.22)                 | 4              | 21          | 3.33         | 16.7/8.33      |
| 3                       | <b>HS10F3AS</b>                     | <b>HSS10F3AS</b>                       | 12.00 (304.8)  | 10.00 (254.0) | 7.00 (177.8)  | 66.0 (29.94)                 | 4              | 22          | 5.0          | 25.0/12.5      |
| 5                       | <b>HS10F5AS</b>                     | <b>HSS10F5AS</b>                       | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 100.0 (45.36)                | 4              | 22          | 8.3          | 41.6/20.8      |
| 7.5                     | <b>HS10F7.5AS</b>                   | <b>HSS10F7.5AS</b>                     | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 135.0 (61.23)                | 4              | 22          | 12.5         | 62.5/31.3      |
| 10                      | <b>HS10F10AS</b>                    | <b>HSS10F10AS</b>                      | 17.00 (431.8)  | 14.00 (355.6) | 9.00 (228.6)  | 150.0 (68.04)                | 4              | 22          | 16.7         | 83.3/41.7      |

\* Note: Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.

## Selection Table: Single Phase

## Group 3: 120/208/240/277 Volt Primary, 120/240 Secondary, 60 Hz

| kVA                 | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group 2<br>Stainless Steel | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps<br>@ 277 V | Secondary<br>Amps |
|---------------------|-------------------------------------------|----------------------------------------------|-------------------|------------------|------------------|---------------------------------|------------------------------|---------------------------|----------------------------|-------------------|
| <b>Encapsulated</b> |                                           |                                              |                   |                  |                  |                                 |                              |                           |                            |                   |
| 1                   | HS12F1BS                                  | HSS12F1BS                                    | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 29.0 (13.15)                    | 3                            | 19                        | 3.6                        | 8.33/4.17         |
| 1.5                 | HS12F1.5AS                                | HSS12F1.5AS                                  | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 40.0 (18.14)                    | 4                            | 20                        | 5.4                        | 12.5/6.25         |
| 2                   | HS12F2AS                                  | HSS12F2AS                                    | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 60.0 (27.22)                    | 4                            | 20                        | 7.2                        | 16.7/8.33         |
| 3                   | HS12F3AS                                  | HSS12F3AS                                    | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 66.0 (29.94)                    | 4                            | 20                        | 10.8                       | 25.0/12.5         |
| 5                   | HS12F5AS                                  | HSS12F5AS                                    | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 104.0 (47.17)                   | 4                            | 20                        | 18.0                       | 41.6/20.8         |
| 7.5                 | HS12F7.5AS                                | HSS12F7.5AS                                  | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 135.0 (61.23)                   | 4                            | 20                        | 27.1                       | 62.5/31.3         |
| 10                  | HS12F10AS                                 | HSS12F10AS                                   | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 156.0 (70.76)                   | 4                            | 20                        | 36.1                       | 83.3/41.7         |

Group 4: Export 190/200/208/220/380/400/415/440 Volt Primary, 110/220 Secondary, 50/60 Hz Copper wound  
 Export 200/208/230/400/415/460 Volt Primary, 115/230 Secondary, 50/60 Hz Copper wound  
 Export 208/240/415/480 Volt Primary, 120/240 Secondary, 60 Hz only Copper wound

| kVA                               | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group 2<br>Stainless Steel | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps <sup>2</sup> | Secondary<br>Amps |
|-----------------------------------|-------------------------------------------|----------------------------------------------|-------------------|------------------|------------------|---------------------------------|------------------------------|---------------------------|------------------------------|-------------------|
| <b>Encapsulated, Copper Wound</b> |                                           |                                              |                   |                  |                  |                                 |                              |                           |                              |                   |
| 1                                 | HS14F1BS                                  | HSS14F1BS                                    | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 34.0 (15.42)                    | 3                            | 23                        | 4.5/2.3                      | 9.1/4.5           |
| 1.5                               | HS14F1.5BS                                | HSS14F1.5BS                                  | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 40.0 (18.13)                    | 4                            | 24                        | 6.8/3.4                      | 13.6/6.8          |
| 2                                 | HS14F2BS                                  | HSS14F2BS                                    | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 60.0 (27.21)                    | 4                            | 24                        | 9.1/4.5                      | 18.2/9.1          |
| 3                                 | HS14F3BS                                  | HSS14F3BS                                    | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 73.0 (33.11)                    | 4                            | 24                        | 13.6/6.8                     | 27.3/13.6         |
| 5                                 | HS14F5BS                                  | HSS14F5BS                                    | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 100.0 (45.36)                   | 4                            | 24                        | 22.7/11.4                    | 45.5/22.7         |
| 7.5                               | HS14F7.5BS                                | HSS14F7.5BS                                  | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 140.0 (63.50)                   | 4                            | 24                        | 34.1/17.0                    | 68.2/34.1         |
| 10                                | HS14F10BS                                 | HSS14F10BS                                   | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 175.0 (79.38)                   | 4                            | 24                        | 45.5/22.7                    | 90.9/45.5         |

## Notes:

- Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
- Amperage calculated at 220/440 Volts on primary. UL Listed, CSA Certified and CE Marked. 240 & 480 V not available at 50 Hz.

## Selection Tables: Three Phase

### Group A: 480 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style <sup>1</sup> | Elec Conn <sup>1</sup> | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|---------------------------|------------------------|--------------|----------------|
| 3   | HT1F3AS                             | HTS1F3AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 105.0 (47.63)                | 4                         | 27                     | 3.6          | 8.3            |
| 6   | HT1F6AS                             | HTS1F6AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 110.0 (49.90)                | 4                         | 27                     | 7.2          | 16.6           |
| 9   | HT1F9AS                             | HTS1F9AS                                | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 250.0 (113.40)               | 4                         | 27                     | 10.8         | 25.0           |
| 15  | HT1F15AS                            | HTS1F15AS                               | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 261.0 (118.39)               | 4                         | 27                     | 18.1         | 41.7           |
| 30  | HT1F30AS                            | HTS1F30AS                               | 30.00 (762.0)  | 29.00 (736.6) | 12.00 (304.8) | 696.0 (315.70)               | 4                         | 27                     | 36.1         | 83.4           |
| 45  | HT1F45AS                            | HTS1F45AS                               | 30.00 (762.0)  | 29.00 (736.6) | 12.00 (304.8) | 844.0 (382.83)               | 4                         | 27                     | 54.2         | 125.0          |

### Group B: 208 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style <sup>1</sup> | Elec Conn <sup>1</sup> | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|---------------------------|------------------------|--------------|----------------|
| 3   | HT3F3AS                             | HTS3F3AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 97.0 (44.00)                 | 4                         | 26                     | 7.2          | 8.3            |
| 6   | HT3F6AS                             | HTS3F6AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 141.0 (63.96)                | 4                         | 26                     | 14.4         | 16.6           |
| 9   | HT3F9AS                             | HTS3F9AS                                | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 256.0 (116.12)               | 4                         | 26                     | 21.7         | 25.0           |

### Group C: 480 Volt $\Delta$ Primary, 240 Volt $\Delta$ 120 Secondary with reduced capacity center tap, 60 Hz <sup>2</sup>

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style <sup>1</sup> | Elec Conn <sup>1</sup> | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|---------------------------|------------------------|--------------|----------------|
| 3   | HT5F3AS                             | HTS5F3AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 105.0 (47.63)                | 4                         | 28                     | 3.6          | 7.2            |
| 6   | HT5F6AS                             | HTS5F6AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 110.0 (49.90)                | 4                         | 28                     | 7.2          | 14.4           |
| 9   | HT5F9AS                             | HTS5F9AS                                | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 250.0 (113.40)               | 4                         | 28                     | 10.8         | 21.7           |
| 15  | HT5F15AS                            | HTS5F15AS                               | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 305.0 (138.35)               | 4                         | 28                     | 18.1         | 36.1           |
| 30  | HT5F30AS                            | HTS5F30AS                               | 29.00 (736.6)  | 25.00 (635.0) | 12.00 (304.8) | 698.0 (316.61)               | 4                         | 28                     | 36.1         | 72.2           |
| 45  | HT5F45AS                            | HTS5F45AS                               | 29.00 (736.6)  | 25.00 (635.0) | 12.00 (304.8) | 876.0 (397.35)               | 4                         | 28                     | 54.2         | 108.3          |

### Group D: 240 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style <sup>1</sup> | Elec Conn <sup>1</sup> | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|---------------------------|------------------------|--------------|----------------|
| 3   | HT6F3AS                             | HTS6F3AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 97.0 (44.00)                 | 4                         | 25                     | 7.2          | 8.3            |
| 6   | HT6F6AS                             | HTS6F6AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 141.0 (63.96)                | 4                         | 25                     | 14.4         | 16.6           |
| 9   | HT6F9AS                             | HTS6F9AS                                | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 256.0 (116.12)               | 4                         | 25                     | 21.7         | 25.0           |

#### Notes:

- Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
- Refer to *Capacity of Center Tap in Center Tap Delta Transformers* at the beginning of this section.

## Selection Tables: Three Phase

Group E: 480 Volt  $\Delta$  Primary, 380Y/220 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|----------------|-------------|--------------|----------------|
| 3   | HT79F3AS                            | HTS79F3AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 121.0 (54.88)                | 4              | 29          | 3.6          | 4.6            |
| 6   | HT79F6AS                            | HTS79F6AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 141.0 (63.96)                | 4              | 29          | 7.2          | 9.1            |
| 9   | HT79F9AS                            | HTS79F9AS                               | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 255.0 (115.7)                | 4              | 29          | 10.8         | 13.6           |

Group F: 600 Volt  $\Delta$  Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Approx. Ship Weight lbs (kg) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|------------------------------|----------------|-------------|--------------|----------------|
| 3   | HT7F3AS                             | HTS7F3AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 116.0 (52.62)                | 4              | 30          | 2.9          | 8.3            |
| 6   | HT7F6AS                             | HTS7F6AS                                | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 145.0 (65.77)                | 4              | 30          | 5.8          | 16.6           |
| 9   | HT7F9AS                             | HTS7F9AS                                | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 225.0 (115.67)               | 4              | 30          | 8.7          | 25.0           |

Group G: 208 Volt  $\Delta$  Primary, 480Y/277 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Ship Weight Approx. (lbs) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|---------------------------|----------------|-------------|--------------|----------------|
| 3   | HT84F3AS                            | HTS84F3AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 97.0 (44.00)              | 4              | 31          | 8.3          | 3.6            |
| 6   | HT84F6AS                            | HTS84F6AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 141.0 (63.96)             | 4              | 31          | 16.6         | 7.2            |
| 9   | HT84F9AS                            | HTS84F9AS                               | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 256.0 (116.12)            | 4              | 31          | 25.0         | 10.8           |

Group H: 240 Volt  $\Delta$  Primary, 480Y/277 Secondary, 60 Hz

| kVA | Catalog Number Group I Rolled Steel | Catalog Number Group II Stainless Steel | Height in (mm) | Width in (mm) | Depth in (mm) | Ship Weight Approx. (lbs) | Design Style * | Elec Conn * | Primary Amps | Secondary Amps |
|-----|-------------------------------------|-----------------------------------------|----------------|---------------|---------------|---------------------------|----------------|-------------|--------------|----------------|
| 3   | HT85F3AS                            | HTS85F3AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 97.0 (44.00)              | 4              | 32          | 7.2          | 3.6            |
| 6   | HT85F6AS                            | HTS85F6AS                               | 13.00 (330.2)  | 16.00 (406.4) | 9.00 (228.6)  | 141.0 (63.96)             | 4              | 32          | 14.4         | 7.2            |
| 9   | HT85F9AS                            | HTS85F9AS                               | 17.00 (431.8)  | 20.00 (508.0) | 11.00 (279.4) | 256.0 (116.12)            | 4              | 32          | 21.6         | 10.8           |

\* Notes: Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.


Design Styles



Style 2 - Non-Encapsulated



Style 3 - Encapsulated

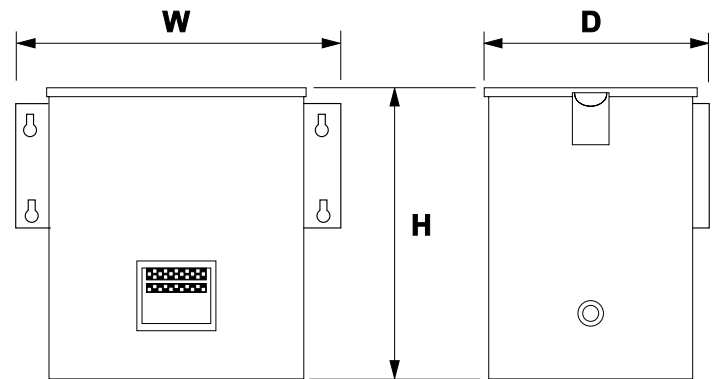

Style 4 - Encapsulated

Customized Enclosures - Contact Technical Services



Style 5 - Encapsulated

Available for all encapsulated kVA sizes (For Type 4, 12 and 4X)

### Electrical Connections (Single Phase)

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: None

**15**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 480               | H2 to H3                  | H1 & H4          |
| 240               | H1 to H3<br>H2 to H4      | H1 & H4          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS1 Series**

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: None

**16**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 480               | H2 to H3                  | H1 & H4          |
| 240               | H1 to H3<br>H2 to H4      | H1 & H4          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS1 Series**

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: 2, 2½% FCAN & FCBN

**17**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 504               | H4 to H5                  | H1 & H8          |
| 492               | H3 to H5                  | H1 & H8          |
| 480               | H3 to H6                  | H1 & H8          |
| 468               | H2 to H6                  | H1 & H8          |
| 456               | H2 to H7                  | H1 & H8          |
| 252               | H1 to H5<br>H4 to H8      | H1 & H8          |
| 240               | H1 to H6<br>H3 to H8      | H1 & H8          |
| 228               | H1 to H7<br>H2 to H8      | H1 & H8          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS5 Series**

240 X 480 Volt Primary,  
120/240 Volt Secondary  
Taps: 2, 2½% FCAN; 4, 2½% FCBN

**18**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 504               | H5 to H6                  | H1 & H10         |
| 492               | H4 to H6                  | H1 & H10         |
| 480               | H4 to H7                  | H1 & H10         |
| 468               | H3 to H7                  | H1 & H10         |
| 456               | H3 to H8                  | H1 & H10         |
| 444               | H2 to H8                  | H1 & H10         |
| 432               | H2 to H9                  | H1 & H10         |
| 252               | H1 to H6<br>H5 to H10     | H1 & H10         |
| 240               | H1 to H7<br>H4 to H10     | H1 & H10         |
| 228               | H1 to H8<br>H3 to H10     | H1 & H10         |
| 216               | H1 to H9<br>H2 to H10     | H1 & H10         |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS5 Series**

120/208/240/277 Volt Primary  
120/240 Volt Secondary  
Taps: None

**19**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 277               | H2 to H3                  | H1 & H6          |
| 240               | H2 to H3                  | H1 & H5          |
| 208               | H2 to H3                  | H1 & H4          |
| 120               | H1 to H3<br>H2 to H5      | H1 & H5          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS12 Series (1 kVA only)**

120/208/240/277 Volt Primary  
120/240 Volt Secondary  
Taps: None

**20**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 277               | H4 to H5                  | H1 & H8          |
| 240               | H3 to H6                  | H1 & H8          |
| 208               | H2 to H7                  | H1 & H8          |
| 120               | H1 to H6<br>H3 to H8      | H1 & H8          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS12 Series**

$\perp$  = Earth Ground

Note:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.

### Electrical Connections (Single Phase)

600 Volt Primary,  
120/240 Volt Secondary  
Taps: None

**21**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 600               |                           | H1 & H2          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS10 Series**

Note: 1 through 2 kVA units have electrostatic shielding.

600 Volt Primary  
120/240 Volt Secondary  
Taps: 2, 5% FCBN

**22**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 600               | H3 to H4                  | H1 & H6          |
| 570               | H2 to H4                  | H1 & H6          |
| 540               | H2 to H5                  | H1 & H6          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS10 Series**

190/200/208/220/380/400/415/440 Volt Pri.  
110/220 Volt Secondary  
Taps: None

**23**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 440               | H5 to H6                  | H1 & H10         |
| 415               | H4 to H6                  | H1 & H9          |
| 400               | H3 to H6                  | H1 & H8          |
| 380               | H2 to H6                  | H1 & H7          |
| 220               | H1 to H6<br>H5 to H10     | H1 & H10         |
| 208               | H1 to H6<br>H4 to H9      | H1 & H9          |
| 200               | H1 to H6<br>H3 to H8      | H1 & H8          |
| 190               | H1 to H6<br>H2 to H7      | H1 & H7          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 220               | X2 to X3                  | X1 & X4          |
| 110-0-110         | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 110               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS14 Series (1 kVA only)**

190/200/208/220/380/400/415/440 Volt Pri.  
110/220 Volt Secondary  
Taps: None

**24**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 440               | H5 to H6                  | H1 & H10         |
| 415               | H4 to H7                  | H1 & H10         |
| 400               | H3 to H8                  | H1 & H10         |
| 380               | H2 to H9                  | H1 & H10         |
| 220               | H1 to H6,<br>H5 to H10    | H1 & H10         |
| 208               | H1 to H7,<br>H4 to H10    | H1 & H10         |
| 200               | H1 to H8,<br>H3 to H10    | H1 & H10         |
| 190               | H1 to H9<br>H2 to H10     | H1 & H10         |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 220               | X2 to X3                  | X1 & X4          |
| 110-0-110         | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 110               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS14 Series**



Note:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.



### Electrical Connections (Three Phase)

240 Δ Volt Primary 208Y/120 Volt Secondary  
Taps: 2, 5% FCBN **25**

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 240               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 228               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 216               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage | Interconnect       | Connect Lines To |
| 208               |                    | X1, X2, & X3     |
| 120               |                    | X0, X1, X2, X3   |

**HT6 Series**

208 Δ Volt Primary 208Y/120 Volt Secondary  
Taps: 2, 5% FCBN **26**

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 208               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 198               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 187               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage | Interconnect       | Connect Lines To |
| 208               |                    | X1, X2, & X3     |
| 120               |                    | X0, X1, X2, X3   |

**HT3 Series**

480 Δ Volt Primary 208Y/120 Volt Secondary  
Taps: 2, 5% FCBN **27**

| Primary Voltage   | Interconnect        | Connect Lines to |
|-------------------|---------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3- H3 | H1, H2, H3       |
| 456               | 4-H1 & 5-H2 & 6- H3 | H1, H2, H3       |
| 432               | 7-H1 & 8-H2 & 9- H3 | H1, H2, H3       |
| Secondary Voltage | Interconnect        | Connect Lines to |
| 208               |                     | X1, X2, & X3     |
| 120               |                     | X0, X1, X2, X3   |

**HT1 Series**

480 Δ Volt Primary 240 Δ w/120 CT Volt Secondary  
Taps: 2, 5% FCBN **28**

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 456               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 432               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage | Interconnect       | Connect Lines To |
| 240               |                    | X1, X2, X3       |
| 120-0-120         | X6 to              | X1-X6-X3         |

**HT5 Series**

480 Δ Volt Primary 380Y/220 Volt Secondary  
Taps: 2, 5% FCBN **29**

| Primary Voltage   | Interconnect       | Connect Lines to |
|-------------------|--------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3-H3 | H1, H2 & H3      |
| 456               | 4-H1 & 5-H2 & 6-H3 | H1, H2 & H3      |
| 432               | 7-H1 & 8-H2 & 9-H3 | H1, H2 & H3      |
| Secondary Voltage | Interconnect       | Connect Lines to |
| 380               |                    | X1, X2, X3       |
| 220               |                    | X0, X1, X2, X3   |

**HT9 Series**

= Earth Ground

**Notes:**

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.

Electrical Connections (Three Phase)

600 Δ Volt Primary  
208Y/120 Volt Secondary  
Taps: 2, 5% FCBN

**30**

| Primary Voltage   | Connect Taps       | Line Leads     |
|-------------------|--------------------|----------------|
| 600               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3     |
| 570               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3     |
| 540               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3     |
| Secondary Voltage |                    | Line Leads     |
| 208               |                    | X1, X2, X3     |
| 120               |                    | X0, X1, X2, X3 |

**HT7 Series**

208 Δ Volt Primary  
480Y/277 Volt Secondary  
Taps: 2, 5% FCBN

**31**

| Primary Voltage   | Connect Taps       | Line Leads     |
|-------------------|--------------------|----------------|
| 208               | 1-X1 & 2-X2 & 3-X3 | X1, X2, X3     |
| 198               | 4-X1 & 5-X2 & 6-X3 | X1, X2, X3     |
| 187               | 7-X1 & 8-X2 & 9-X3 | X1, X2, X3     |
| Secondary Voltage |                    | Line Leads     |
| 480               |                    | H1, H2, H3     |
| 277               |                    | H0, H1, H2, H3 |

**HT84 Series**

240 Δ Volt Primary  
480Y/277 Volt Secondary  
Taps: 2, 5% FCBN

**32**

| Primary Voltage   | Connect Taps       | Line Leads     |
|-------------------|--------------------|----------------|
| 240               | 1-X1 & 2-X2 & 3-X3 | X1, X2, X3     |
| 228               | 4-X1 & 5-X2 & 6-X3 | X1, X2, X3     |
| 216               | 7-X1 & 8-X2 & 9-X3 | X1, X2, X3     |
| Secondary Voltage |                    | Line Leads     |
| 480               |                    | H1, H2, H3     |
| 277               |                    | H0, H1, H2, H3 |

**HT85 Series**

Notes:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)