# General Specifications

## Electrical Capacity (Resistive Load)

**Power Level (silver):** 3A @ 125V AC or 3A @ 250V AC or 3A @ 30V DC
**Logic Level (gold):** 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 50 milliohms maximum for silver; 100 milliohms maximum for gold
**Insulation Resistance:** 200 megohms minimum @ 500V DC
**Dielectric Strength:** 1,000V AC minimum between contacts for 1 minute minimum;
1,500V AC minimum between contacts & case for 1 minute minimum
**Mechanical Life:** 1,000,000 operations minimum for momentary circuit
200,000 operations minimum for maintained circuit
**Electrical Life:** 100,000 operations minimum
**Nominal Operating Force:** Single pole: 1.47N for nonsealed; 1.67N for sealed
Double pole: 2.75N for nonsealed; 2.94N for sealed
**Contact Timing:** Nonshorting (break-before-make)
**Travel:** Pretravel .059" (1.5mm); Overtravel .059" (1.5mm); Total Travel .118" (3.0mm)

## Materials & Finishes

**Housing/Bezel:** Glass fiber reinforced polyamide (UL94V-0)
**Snap-in Frame:** Stainless steel
**Base:** Diallyl phthalate resin (UL94V-0)
**Movable Contactor:** Phosphor bronze with silver or gold plating
**Movable Contacts:** Silver alloy with silver plating or brass with gold plating
**Stationary Contacts:** Silver alloy or copper with gold plating
**Switch Terminals:** Phosphor bronze with tin plating
**Lamp Terminals:** Phosphor bronze with tin plating

## Environmental Data

**Operating Temperature Range:** –25°C through +50°C (–13°F through +122°F) for Illuminated
–25°C through +70°C (–13°F through +158°F) for Nonilluminated
**Humidity:** 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
**Shock:** 50G (490m/s$^2$) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
**Sealing:** IP65 of IEC60529 standard for panel seal models

## Installation

**Mounting Torque:** 0.785Nm (6.95 lb•in) maximum
**Quick Connect Force:** 24.5N maximum downward force on connector
**Soldering Time & Temperature:** Manual Soldering: See Profile A in Supplement section.

## Standards & Certifications

**Flammability Standards:** UL94V-0 housing & base
**UL:** **File No. E44145 - Recognized only when ordered with marking on switch.**
Add "/U" or "/CUL" before first dash in part number to order UL recognized switch.
All solder lug models recognized at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.
**CSA:** **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
Add "/C" before first dash in part number to order CSA certified switch.
All solder lug models certified at 3A @ 125/250V AC or 0.4VA @ 28V AC/DC maximum.

# Distinctive Characteristics

Full face or spot illumination with incandescent lamps or multi-element LEDs, with or without resistors.

Choice of super bright LEDs in white, green, and blue as well as bright LEDs in red, amber, and green.

Combination bezel-barrier is an integral part of the switch and prevents accidental actuation.

Unique thermoplastic elastomer seal inside caps plus rolled sleeve of nitrile butadiene rubber at joining of housing and inner case, all for added protection to interior mechanism.

Dust and oil tight as well as splashproof panel seal models qualify to IP65 of IEC60529 Standards (similar to NEMA 4 and 13). Panel seal models provided with exterior o-ring.

Distinctive design of snap-action contacts for shock resistance, long life, and sensitive actuation.

High density design to give behind panel depth of less than one inch.

Terminals are epoxy sealed to lock out flux, dust, solvents, and other contaminants.

Latchdown for indication of circuit status, plus audible, tactile feedback with smooth, responsive operation.

Matching indicators available.

Actual Size

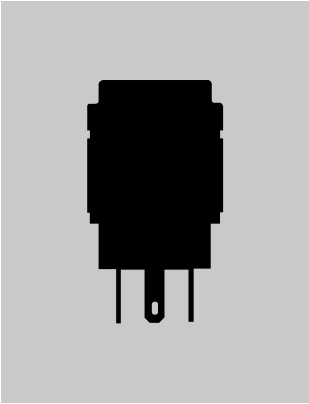

## TYPICAL SWITCH ORDERING EXAMPLE

YB | 1 | 5 | | C | K | W | 01 — 6F — JB

### Poles

| | |
|---|---|
| 1 | SPDT |
| 2 | DPDT |

### Panel Seal

| | |
|---|---|
| No Code | Without Panel Seal |
| W | With Panel Seal (Bushing Mount only) |

### Housing

| | |
|---|---|
| K | Black only |

### Terminals

| | |
|---|---|
| 01 | Solder Lug/.110" (2.8mm) Quick Connect* |
| 03 | Straight PC |

### Circuits

| | | |
|---|---|---|
| 5 | ON | (ON) |
| ( ) = Momentary | | |
| 6 | ON | ON |
| Alternate Action with Latchdown | | |

### Shapes

| | |
|---|---|
| **Bushing Mounting** | |
| S | Square |
| C | Round |
| R | Rectangular |
| **Snap-in Mounting** | |
| K | Square |
| M | Round |
| N | Rectangular |

### Contact Materials & Ratings

| | |
|---|---|
| W | Silver Rated 3A @ 125V AC |
| G | Gold Rated 0.4VA max. @ 28V AC/DC max. |

### Lamps

| Incandescent Lamp | |
|---|---|
| 05 | 5-volt |
| 12 | 12-volt |
| No Code | Nonilluminated |

| LED for Spot Illuminated Cap | | | |
|---|---|---|---|
| LED Colors | | Forward Voltage | |
| 1C | Red | 02 | 2-volt (no resistor) |
| 1D | Amber | 05 | 5-volt |
| 1F | Green | 12 | 12-volt |
| 1CF | Red/Green | 24 | 24-volt |

| Bright LED | | | |
|---|---|---|---|
| LED Colors | | Resistor | |
| 5C | Red | No Code | No Resistor |
| 5D | Amber | 05 | 5-volt |
| 5F | Green | 12 | 12-volt |
| | | 24 | 24-volt |

| Super Bright LED | |
|---|---|
| 6B | White |
| 6F | Green |
| 6G | Blue |

| Bicolor LED for Full Face Illuminated | | | |
|---|---|---|---|
| LED Colors | | Forward Voltage | |
| 2CF | Red/Green | 02 | 2-volt (no resistor) |
| | | 05 | 5-volt |
| | | 12 | 12-volt |
| | | 24 | 24-volt |

### Cap Types & Colors

| Solid Cap: Lens/Insert Colors | |
|---|---|
| BB | White/White |
| CB | Red/White |
| EB | Yellow/White |
| FB | Green/White |
| GB | Blue/White |

| Spot Illuminated Cap: Lens/Insert Colors | |
|---|---|
| JA | Clear/Black |
| JB | Clear/White |
| JC | Clear/Red |
| JE | Clear/Yellow |
| JF | Clear/Green |

| LED Cap: Lens/Insert Colors | |
|---|---|
| JB | Clear/White |
| JC | Clear/Red |
| JD | Clear/Amber |
| JF | Clear/Green |

| LED Cap: Lens/Insert Colors | |
|---|---|
| JB | Clear/White |

| LED Cap: Lens/Insert Colors | |
|---|---|
| JB | Clear/White |

**IMPORTANT:**

Switches are supplied without UL, cULus & CSA marking unless specified. **UL, cULus & CSA recognized only when ordered with marking on the switch.** Specific models, ratings, & ordering instructions are noted on General Specifications page.

* Wire harness & cable assemblies offered only in Americas

### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

**YB15CKW01-6F-JB**

## POLES & CIRCUITS

| Pole | Model | Plunger Position ( ) = Momentary: Normal | Plunger Position ( ) = Momentary: Down | Connected Terminals: Normal | Connected Terminals: Down | Throw & Switch/Lamp Schematics |
|---|---|---|---|---|---|---|
| | | | | | | Notes: Switch is marked with NC, NO, COM, L+, L–. Lamp circuit is isolated and requires external power source. |
| SP | **YB15** ***YB16** | ON ON | (ON) ON | 1-3 | 1-2 | SPDT |
| DP | **YB25** ***YB26** | ON ON | (ON) ON | 1-3 4-6 | 1-2 4-5 | DPDT   |

* When in latchdown position for the alternate circuit, cap position is .020" (0.5mm) above the built-in bezel.

## PANEL SEAL

**No Code** **Without Panel Seal**

**Bushing Mounting**



Supplied with mounting nut.

**Snap-in Mounting**



**W** **With Panel Seal**

**Bushing Mounting only**



Supplied with mounting nut and o-ring AT089.

## SHAPES & MOUNTING TYPES

**Bushing Mounting**

**S** **Square**



**C** **Round**



**R** **Rectangular**



**Snap-in Mounting**

**K** **Square**



**M** **Round**



**N** **Rectangular**



Bezel-barrier is an integral part of the switch body.

## HOUSING

**K** **Black**

Housing available in black only. The 1-piece body and bezel-barrier have a matte finish.

## CONTACT MATERIALS & RATINGS

**W** **Silver Contacts**

**G** **Gold Contacts**

**Power Level** **3A @ 125/250V AC**

**Logic Level** **0.4VA max. @ 28V AC/DC max.**

Complete explanation of operating range in Supplement section.

## TERMINALS

**01** **Solder Lug/ .110" (2.8mm) Quick Connect**




**03** **Straight PC**




Single Pole




Double Pole




## INCANDESCENT LAMP & SOLID CAP

Electrical specifications are determined at a basic temperature of 25°C. Lamp circuit is independent of switch operation.
For dimension drawing of lamp see the Accessories & Hardware section.

**AT611**

T-1 Bi-pin

| | | 05 | 12 |
|---|---|---|---|
| Voltage | V | 5V AC | 12V AC |
| Current | I | 115mA | 60mA |
| MSCP | | .150 | .150 |
| Endurance | Hours | 7,000 average | |
| Ambient Temperature Range | | –25°C ~ +50°C | |

**No Code** **No Lamp**

### Solid Cap for Incandescent Lamp & Nonilluminated

**Lens/Insert Colors Available:**

- **BB** White/White
- **CB** Red/White
- **EB** Yellow/White
- **FB** Green/White
- **GB** Blue/White

**AT3002 Round**




**AT3001 Square**




**AT3003 Rectangular**

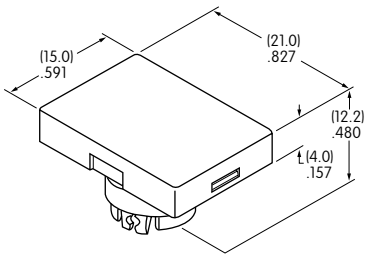




Translucent Colored Lens



Translucent White Insert



Translucent White Seal/Filter

Incandescent Lamp AT611

**Materials:**

Lens & Insert: Polycarbonate Seal/Filter: Thermoplastic Elastomer

## SPOT ILLUMINATED CAP WITH BUILT-IN LED

This spot-illuminated cap is factory assembled.

**AT3010**
**Square**




**AT3011**
**Round**




**AT3012**
**Rectangular**

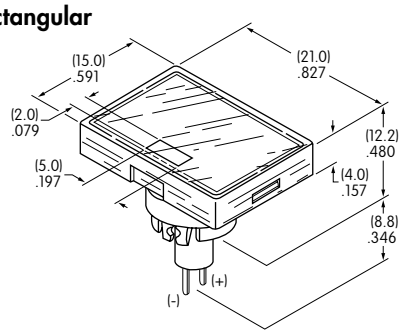


| Colors Available: 1C Red | 1D Amber | 1F Green | 1CF Red/Green | 02 Without Resistor | 05 With Resistor | 12 With Resistor | 24 With Resistor | Unit |
|---|---|---|---|---|---|---|---|---|
| Forward Peak Current | | | $I_{FM}$ | 20 | 15 | 15 | 12 | mA |
| Typical Forward Current | | | $I_F$ | 15 | 12.5 | 12.5 | 10 | mA |
| Forward Voltage | | | $V_F$ | 2.1 | 5 | 12 | 24 | V |
| Reverse Peak Voltage (not applicable to bicolor) | | | $V_{RM}$ | 5 | 5 | 5 | 5 | V |
| Current Reduction Rate Above 25°C | | | $\Delta I_F$ | 0.27 | —— | —— | —— | mA/°C |
| Ambient Temperature Range | | | | −25 ~ +50 | | | | °C |

Without Resistor 2-volt




Single Color




Bicolor

With Resistor 5, 12, 24-volt




Single Color




Bicolor

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Single color LEDs are colored in OFF state. Bicolor LED is translucent white in OFF state.

If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

**Lens/Insert Colors Available:**

- JA **Clear/Black**
- JB **Clear/White**
- JC **Clear/Red**
- JE **Clear/Yellow**
- JF **Clear/Green**



Clear Lens



Colored Insert



Seal



Built-in LED (integral part of the cap)

Example part number when cap is ordered separate from switch:
**AT3010F02JA**
for a
Square Spot Illuminated Cap
with Green 2-volt LED
without resistor
Clear Lens and Black Insert

**Materials:**
Lens & Insert: Polycarbonate
Seal: Thermoplastic Elastomer

## BRIGHT LED & LED CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

### Electrical Specifications for Bright LED without Resistor

**Bright AT628**




T-1 Bi-pin

| **Colors Available:** 5C Red, 5D Amber, 5F Green | | No Code No Resistor | | | Unit |
|---|---|---|---|---|---|
| | LED Colors | Red | Amber | Green | |
| Forward Peak Current | $I_{FM}$ | 40 | 40 | 40 | mA |
| Typical Forward Current | $I_F$ | 26 | 26 | 26 | mA |
| Forward Voltage | $V_F$ | 1.9 | 2.0 | 2.0 | V |
| Reverse Peak Voltage | $V_{RM}$ | 4 | 4 | 4 | V |
| Current Reduction Rate Above 25°C | $\Delta I_F$ | 0.50 | | | mA/°C |
| Ambient Temperature Range | | −25 ~ +50 | | | °C |

### Electrical Specifications for Bright LED with Resistor

**Bright AT634**

T-1¼ Bi-pin

| **Colors Available:** 5C Red, 5D Amber, 5F Green | | 05 | 12 | 24 | Unit |
|---|---|---|---|---|---|
| Forward Peak Current | $I_{FM}$ | — | — | — | mA |
| Typical Forward Current | $I_F$ | 25 | 20 | 10 | mA |
| Forward Voltage | $V_F$ | 5 | 12 | 24 | V |
| Reverse Peak Voltage | $V_{RM}$ | 4 | 8 | 16 | V |
| Current Reduction Rate Above 25°C | $\Delta I_F$ | —— | —— | —— | mA/°C |
| Ambient Temperature Range | | −25 ~ +50 | | | °C |

AT634 5-volt, 2-element with Resistor




AT634 12-volt, 4-element with Resistor




AT634 24-volt, 4-element with Resistor




### Cap for Bright LED

**Lens/Insert Colors Available:**

- JB Clear/White
- JC Clear/Red
- JD Clear/Amber
- JF Clear/Green

**AT3004 Square**




**AT3005 Round**




**AT3006 Rectangular**

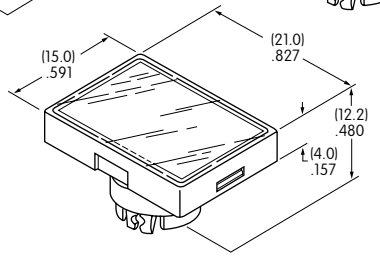




Transparent Clear Lens



Translucent Colored Insert



Translucent White Seal/Diffuser



Bright LEDs
AT628 AT634

**Materials:**
Lens & Insert: Polycarbonate Seal/Diffuser: Thermoplastic Elastomer

## SUPER BRIGHT LED & LED CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

### Electrical Specifications for Super Bright LED

**Super Bright**
**AT625G Blue**
**AT631B White**
**AT632F Green**

T-1 Bi-pin

ATTENTION ELECTROSTATIC SENSITIVE DEVICES

| Colors: | | 6B White | 6F Green | 6G Blue | Unit |
|---|---|---|---|---|---|
| Forward Peak Current | $I_{FM}$ | 30 | 30 | 30 | mA |
| Typical Forward Current | $I_F$ | 20 | 20 | 20 | mA |
| Forward Voltage | $V_F$ | 3.6 | 3.5 | 3.6 | V |
| Reverse Peak Voltage | $V_{RM}$ | 5 | 5 | 5 | V |
| Current Reduction Rate Above 25°C | $\Delta I_F$ | 0.50 | | | mA/°C |
| Ambient Temperature Range | | −25 ~ +50 | | | °C |

### Cap for Super Bright LED

**AT3014**
**Square**




**AT3015**
**Round**




**AT3016**
**Rectangular**

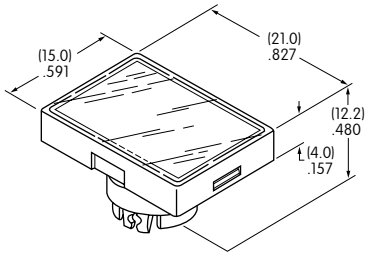


**Lens/Insert Colors Available:**

**JB** **Clear/White**



Transparent Clear Lens



Translucent White Insert



Translucent White Seal/Diffuser

Super Bright LEDs
AT625 AT631
AT632

**Materials:**
Lens & Insert: Polycarbonate Seal/Diffuser: Thermoplastic Elastomer

## BICOLOR LED & LED CAPS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

### Electrical Specifications for Bicolor LED

| **Bicolor AT621** | Bicolor LED is translucent white in OFF state. | | 02 | 05 | 12 | 24 | Unit |
|---|---|---|---|---|---|---|---|
| 2CF Red/Green | Forward Peak Current | $I_{FM}$ | 60 | 60 | 20 | 12 | mA |
| | Typical Forward Current | $I_F$ | 45 | 45 | 15 | 10 | mA |
| | Forward Voltage | $V_F$ | 2.1 | 5 | 12 | 24 | V |
| | Current Reduction Rate Above 25°C | $\Delta I_F$ | 0.80 | —— | —— | —— | mA/°C |
| T-1½ Bi-pin | Ambient Temperature Range | | −25 ~ +50 | | | | °C |

AT621
Bicolor LED
2-volt
6-element
without Resistor




AT621
Bicolor LED
5-volt
6-element
with Resistor




AT621
Bicolor LED
12 & 24-volt
6-element
with Resistor




As shown for Red;
Reverse polarity for Green

### LED Caps

**AT3004**
**Square**




**AT3005**
**Round**




**AT3006**
**Rectangular**

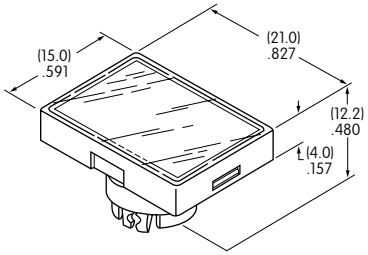




Transparent Clear Lens



Transparent White Insert



Translucent White Seal/Diffuser



Bicolor LED AT621

**Lens/Insert Colors Available:**

JB **Clear/White**

**Materials:**

Lens & Insert: Polycarbonate  Seal/Diffuser: Thermoplastic Elastomer

## TYPICAL SWITCH DIMENSIONS

### Square • Bushing Mounting

### Single & Double Pole




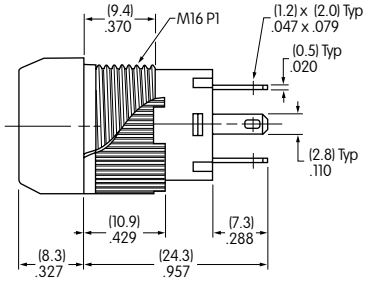





**YB15SKW01-12-CB**

Single pole models do not have terminals 4, 5, & 6.

### Round • Panel Seal

### Single & Double Pole




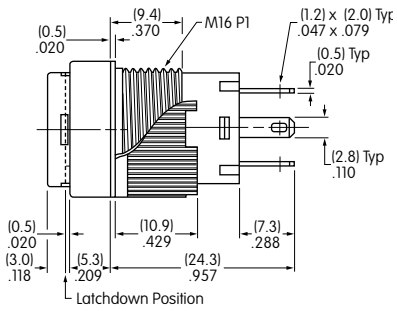





**YB26WCKW01-12-EB**

Single pole models do not have terminals 4, 5, & 6.

### Rectangular • Snap-in Mounting

### Single & Double Pole




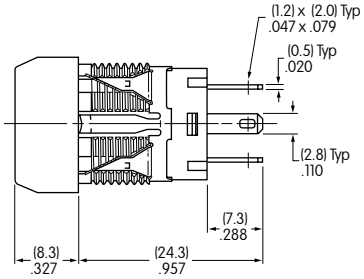





**YB15NKW01-5C-JC**

Single pole models do not have terminals 4, 5, & 6.

## PANEL THICKNESS & CUTOUTS

### Bushing & Panel Seal Mount

Panel Thickness
.020" ~ .197"
(0.5mm ~ 5.0mm)




### Snap-in Mount

Panel Thickness
.039" ~ .138"
(1.0mm ~ 3.5mm)



## OPTIONAL ACCESSORIES

Dust Covers and Protective Guards reduce depth of switch behind panel by .047″ (1.2mm).

**Panel Thickness Range with Dust Cover or Protective Guards:**

| Bushing Mounting | Snap-in Mounting | Panel Seal |
|---|---|---|
| .020″ ~ .150″ (0.5mm ~ 3.8mm) | .020″ ~ .091″ (0.5mm ~ 2.3mm) | .020″ ~ .118″ (0.5mm ~ 3.0mm) |

### Dust/Splash Cover

**AT4115 Dust Cover for Snap-in or Bushing Mount**

**AT4115 Splash Cover and AT541 O-ring for Bushing Mount**

**Dust Cover**




**Splash Cover**




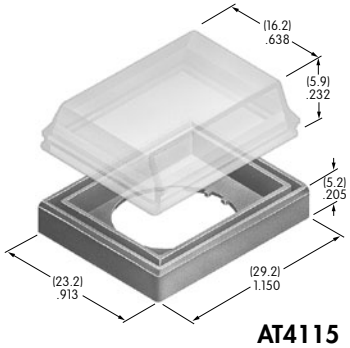


**AT4115**

**Materials:**
Lid: Polyvinyl Chloride
Base: Polyamide
O-ring: Nitrile butadiene rubber

Snap-in Mount

Panel Seal

Note: AT089 o-ring supplied with panel seal model.




**AT541**

### Protective Guard

**AT4072 Protective Guard**
Opens 90°
Closes manually



**Materials:**
Lid: Polycarbonate
Base: Glass Fiber Reinforced Polycarbonate

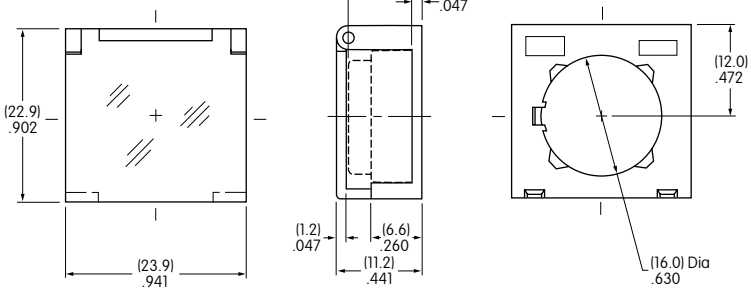


### Spring Loaded Protective Guard

**AT4175 Spring Loaded Protective Guard**
Opens 180°
Closes automatically



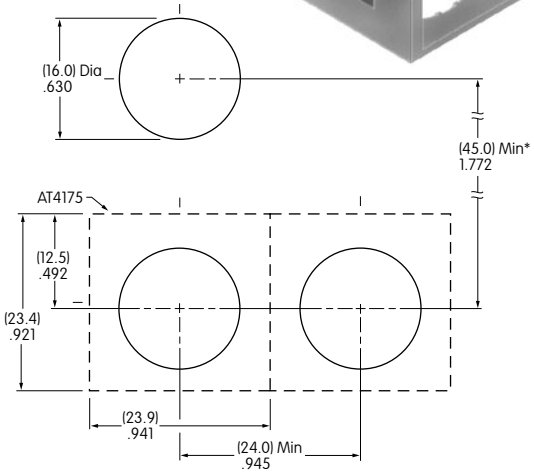


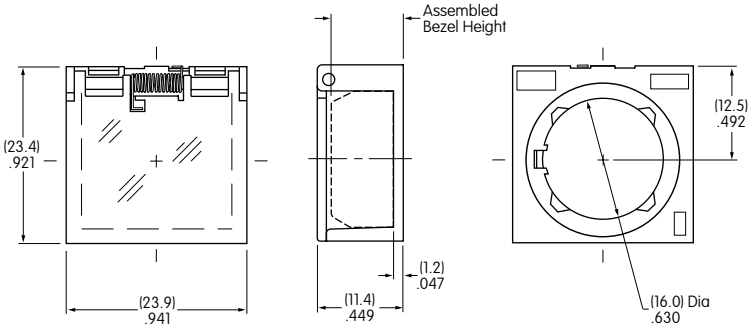


**Materials:**
Lid: Polycarbonate
Base: Glass Fiber Reinforced Polyamide
Coil Spring: Stainless Steel




* Minimum dimension allows opening of cover to 180°

## ASSEMBLY INSTRUCTIONS

### Cap Assembly






Top View of Switch

### LED Polarity & Orientation in Lamp Socket



Spot Illuminated Cap with Built-in LED

ATTENTION
ELECTROSTATIC SENSITIVE DEVICES




LED AT628 AT634 | LEDs AT625G AT631B AT632F | LED AT621

The following installation tools are available: AT106 Socket Wrench for bushing mounting (Overtightening the mounting nut AT092 may damage the switch housing.); AT109 Cap Extractor; AT111 Lamping Tool.
Further details and dimensions are shown in the Accessories and Hardware section.

## LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

### Suggested Printable Area for YB Lens

**Recommended Methods:** Laser Etch on clear lens, Screen Print or Pad Print on Lens.
Epoxy based ink is recommended.










Shaded areas are printable areas.

### Suggested Printable Area for Film Insert

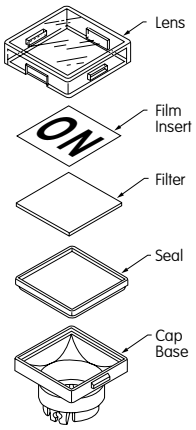


**Recommended Print Method:** Laser Print
Film Insert: Clear Polyester, 4 mil max. thickness










Shaded areas are printable areas.

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***