THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECO-07-010665	26JUN2007	RB	MS

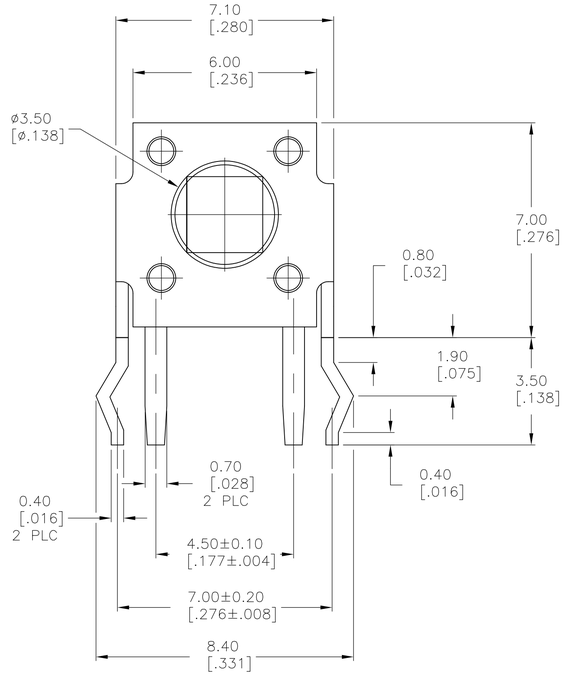

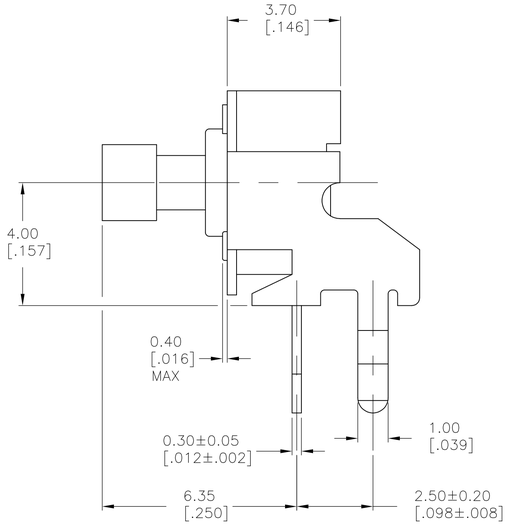

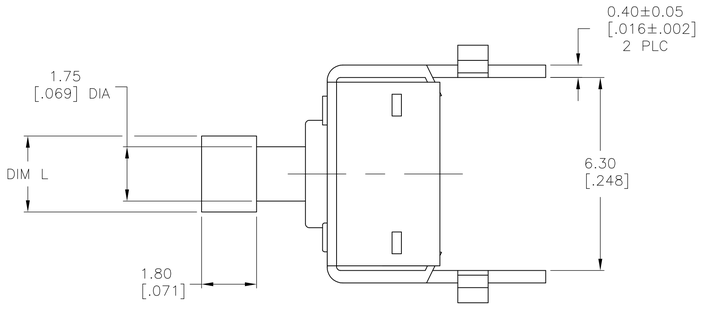

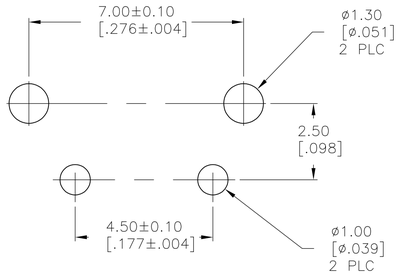

RECOMMENDED HOLE LAYOUT

TOLERANCE ±.002 UNLESS
OTHERWISE NOTED

CIRCUIT DIAGRAM

SPECIFICATIONS:

Materials:
Case, Nylon 66, UL94HB, Black finish
Bracket, Stainless Steel
Actuator, Nylon 66, UL94HB, see P/N table for finish
Moving contact, Copper Alloy, Silver finish
Fixed contact/Terminal, Copper Alloy, Silver over Nickel finish

Electrical:
Max Contact Rating, 50mA@ 24V DC, Per EIA-448, Method 6
Min Contact Rating, 10microamp@1V DC
Initial Contact resistance, 50 milliohms max, Per EIA-364-23B, each position
Insulation Resistance, 1000 Megohm min. Per EIA-364-21C each position
Dielectric strength, 500 V AC for 1 minute, Per EIA-364-20B, Condition 1, each position.
Life Expectancy, 100,000 cycles

Mechanical:
Actuation force, SEE P/N TABLE
Actuation Travel, .25 +/-.10 mm
Life Expectancy, 100,000 cycles min (2 cycles per second and 150% actuation force),
Per EIA-448 Methods 8 and 9
Vibration, Per EIA 364-28D, Condition VII, Level E
Mechanical Shock, Per EIA-364-27C, Condition A

Environmental:
Operating Temperature, -35 to +85 degrees C, Per EIA-448, Method 10
Storage Temperature, -35 to +85 degrees C
Humidity and Temperature Cycling Per EIA-364-31B, Method III
Thermal Shock, Per EIA-364-32C, -35 to +85 degrees C
Solderability, Per EIA-364-52, Class 2, Category 1, Temp, 245 degrees C max,
Time, 2.5 seconds max, 95% Minimum coverage
Resistance to Solder Heat, Per 109-202, Condition B
1. No change in initial electrical and mechanical characteristics

NOTES:

1. ALL MATERAILS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(ROHS).

DIM L	ACTUATOR BUTTON COLOR	ACTUATION FORCE	ALCO PART NO.	TYCO PART NO.
2.80[.110]	YELLOW	260±50 GF	FSMRACDAAH	1825968-3
2.80[.110]	BLACK	160±50 GF	FSMRACDAH	1825968-2
2.40[.094]	BLUE	160±50 GF	FSMRACDH	1825968-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.30[.012]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN R BROWN 13FEB2007
CHK M SARVER 13FEB2007
APVD M SARVER 13FEB2007
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME
TACT SWITCH, R/A, SQUARE ACTUATOR,
6.0 mm, HIGH TEMP,
FSMRACD

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1825968	—

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV B

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru