

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0432550153

Status:


Active

Overview:

mlx

Description:

6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 12 Circuits, PA Polyamide Nylon 6/6 94V-2, Tin (Sn) Plating, Natural (Nylon Off White)

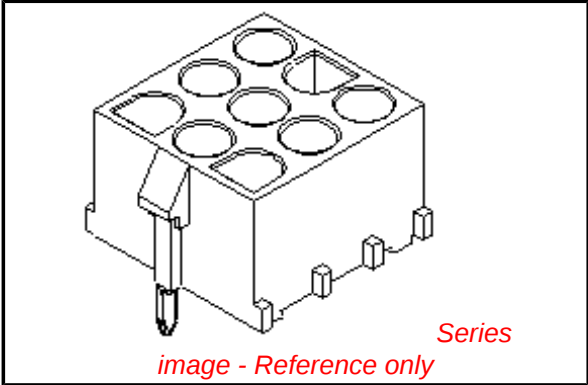

Documents:	
3D Model	Product Specification PSX-42002-0001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	43255
Application	Wire-to-Board
Comments	High Vibration Application
Overview	mlx
Product Name	MLX™
Physical	
Breakaway	No
Circuits (Loaded)	12
Circuits (maximum)	12
Color - Resin	Natural
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height (in)	1.195 In
Mated Height (mm)	30.35 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	3
Orientation	Vertical
PC Tail Length (in)	0.170 In
PC Tail Length (mm)	4.32 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.250 In
Pitch - Mating Interface (mm)	6.35 mm
Pitch - Term. Interface (in)	0.250 In
Pitch - Term. Interface (mm)	6.35 mm
Plating min: Mating (µin)	140
Plating min: Mating (µm)	3.5

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

43255Series

Mates With


42021 MLX™ Power Crimp Housing Plug.

42024 MLX Crimp Terminal

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	9A
Voltage - Maximum	600V
Solder Process Data	
Lead-free Process Capability	Wave Capable (TH only)
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-43255-003
Product Specification	PSX-42002-0001
Sales Drawing	SDA-43255-00**

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

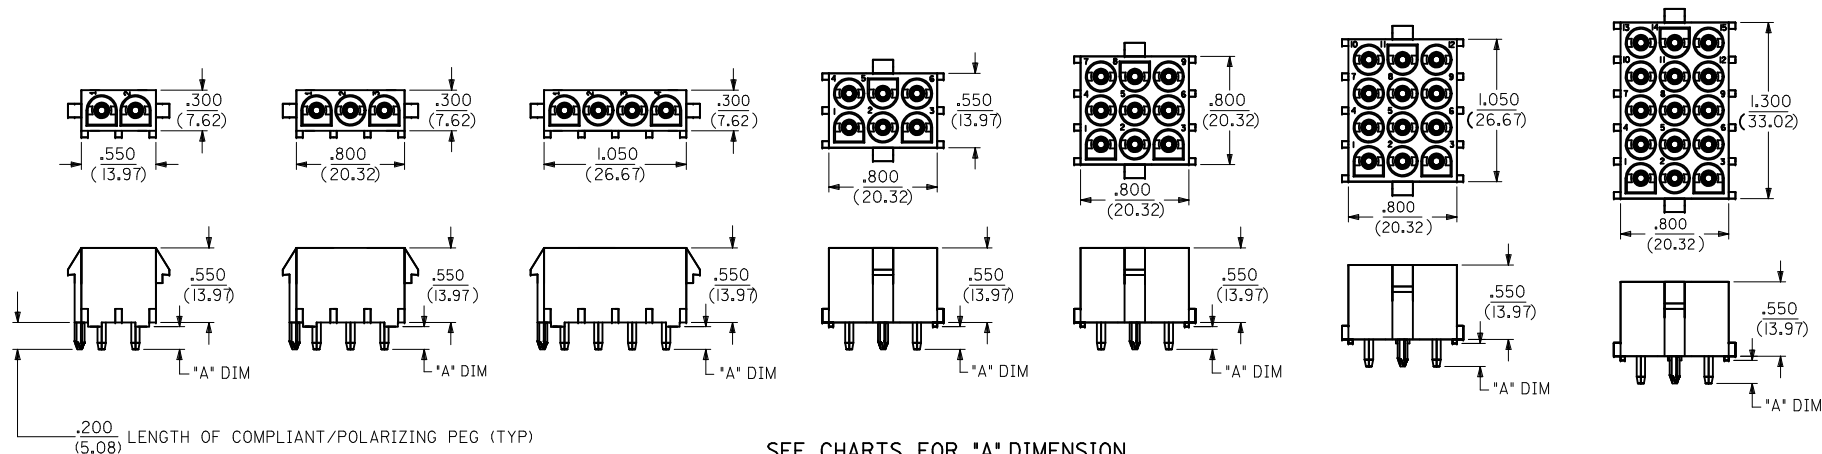


SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

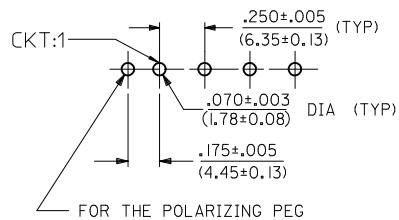

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

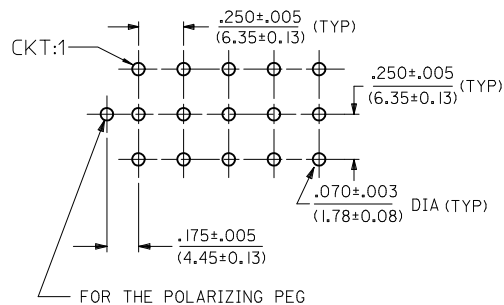

NOTES:

1) MATERIAL CODES:

- 'A'= UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C'= NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D'= NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E'= PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**)

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION EC NO: 12010-0191 DRAWN: HMR01 CHKD: KPRASAD APPR: KPRASAD		2009/12/31 2010/01/05 2010/01/13	DESCRIPTION	REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
						mm	INCH	DRAWN BY SUDHIR	DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(2.13) SERIES COMPLIANT-POLARIZING PEG			
E2						4 PLACES	± ---	± ---	CHECKED BY GJLOWE	DATE 2004/06/08	MOLEX INCORPORATED		
						3 PLACES	± ---	± 0.005	CHECKED BY GJLOWE	DATE 2004/06/08			
						2 PLACES	± 0.13	± 0.01	APPROVED BY GJLOWE	DATE 2004/06/08	SDA-43255-00**		
						1 PLACE	± 0.25	± ---					
						ANGULAR		± 1/2°			1 OF 2		
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
						SIZE		A2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M		ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015	PACKAGING (SEE NOTE 7)												M
		43255-0003	2	A	2	A		.17/(4,3)	A												
		43255-0059		A	1	A			A												
		43255-0113		C	1	A			A												
		43255-0115		C	2	A			A												
		36759-0021		D	1	A			A												
		36759-0061		D	2	A			A												
L		36757-0021	3	E	1	A			A												L
		36757-0061		E	2	A			A												
		43255-0011		A	2	A		.17/(4,3)	A												
		43255-0067		A	1	A			A												
		43255-0121		C	1	A			A												
		43255-0123		C	2	A			A												
K		36759-0022	4	D	1	A			A												K
		36759-0062		D	2	A			A												
		36757-0022		E	1	A			A												
		36757-0062		E	2	A			A												
		43255-0019		A	2	A		.17/(4,3)	A												
		43255-0075		A	1	A			A												
J		43255-0129	6	C	1	A			A												J
		43255-0131		C	2	A			A												
		36759-0023		D	1	A			A												
		36759-0063		D	2	A			A												
		36757-0023		E	1	A			A												
		36757-0063		E	2	A			A												
I		43255-0027	9	A	2	A		.17/(4,3)	A												I
		43255-0083		A	1	A			A												
		43255-0137		C	1	A			A												
		43255-0139		C	2	A			A												
		36759-0024		D	1	A			A												
		36759-0064		D	2	A			A												
H		36757-0024	12	E	1	A			A												H
		36757-0064		E	2	A			A												
		43255-0035		A	2	A		.17/(4,3)	A												
		43255-0091		A	1	A			A												
		43255-0145		C	1	A			A												
		43255-0147		C	2	A			A												
G		36759-0025	15	D	1	A			A												G
		36759-0065		D	2	A			A												
		36757-0025		E	1	A			A												
		36757-0065		E	2	A			A												
		43255-0043		A	2	A		.17/(4,3)	A												
		43255-0099		A	1	A			A												
F		43255-0153	2	C	1	A			A												F
		43255-0155		C	2	A			A												
		36759-0026		D	1	A			A												
		36759-0066		D	2	A			A												
		36757-0026		E	1	A			A												
		36757-0066		E	2	A			A												
E		43255-0051	3	A	2	A		.17/(4,3)	A												E
		43255-0107		A	1	A			A												
		43255-0161		C	1	A			A												
		43255-0163		C	2	A			A												
		36759-0027		D	1	A			A												
		36759-0067		D	2	A			A												
D		36757-0027	4	E	1	A			A												D
		36757-0067		E	2	A			A												
		36766-0001		C	1	A		.17/(4,3)	B												
		36766-0002		C	1	A			B												
		36766-0003		C	1	A			B												
				C	1	A			B												
C																					C
B																					B
A																					A
b_frame_A1_P_AM.T Rev. E 2006/04/15																					

ENTER DESCRIPTION EC NO: 12010-0951 2009/12/31 DRWN:HR01 CHKD:KPRASAD APPR:KPRASAD 2010/01/05 2010/01/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± ---		DRAWN BY SUDHIR DATE 2004/06/08		TITLE HEADER HOUSING ASSEMBLY .084/(12.13) SERIES COMPLIANT-POLARIZING PEG		
		3 PLACES ± --- ± 0.005		CHECKED BY DATE				
		2 PLACES ± 0.13 ± 0.01		GJLOWE 2004/06/08				
		1 PLACE ± 0.25 ± ---		APPROVED BY DATE				
		ANGULAR ±1/2°		GJLOWE 2004/06/08		MOLEX INCORPORATED		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.			DOCUMENT NO. SDA-43255-00**	
				SEE CHART				
		SIZE A 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

RoHS COMPLIANT

19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---

RoHS COMPLIANT

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru