



QPP2209


8 – 12 GHz 40 W VPIN Limiter

Product Overview

Qorvo's QPP2209 is a high power VPIN limiter robust to short-pulse input signals up to 40W. It offers exceptionally low insertion loss over a wide bandwidth and requires no DC bias. The QPP2209 is housed in a low-cost plastic over-molded QFN package.

The QPP2209 is internally matched to 50 ohms and operates from 8 to 12 GHz with typical insertion loss less than 0.5dB and flat leakage below 19dBm. It is capable of withstanding 40W of incident power under short-pulse conditions. It is well suited for both commercial and defense related applications.

Lead-free and RoHS compliant.

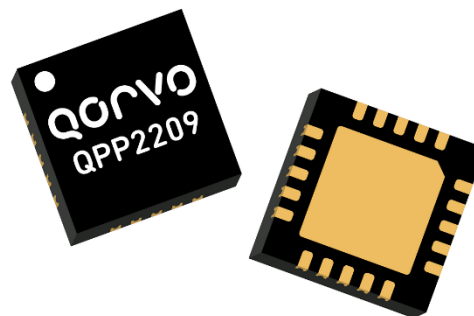


20L 4 x 4 mm OVM QFN Package

Key Features

- Frequency Range: 8 to 12 GHz
- Insertion Loss: < 0.5 dB
- Peak Power Handling: 40 W (pulsed)
- Flat Leakage: < 19 dBm
- Spike Leakage < 20.5 dBm
- Passive (no DC bias required)
- Recovery time < 30 ns
- Package Dimensions: 4.00 x 4.00 x 0.85 mm

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Functional Block Diagram

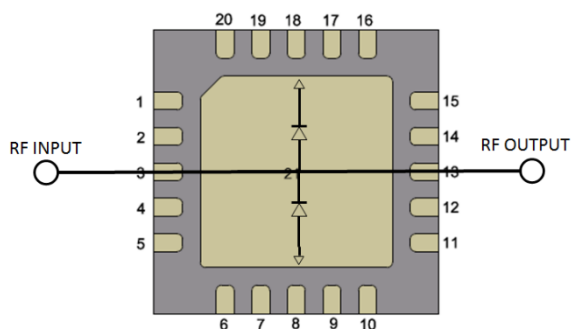

Top View

Applications

- Receive Chain Protection
- Commercial and Military Radar

Ordering Information

Part	Description
QPP2209TR7	8–12 GHz 40W VPIN Limiter, 500 pcs, 7-inch reel
QPP2209TR7X	8–12 GHz 40W VPIN Limiter, 50 pcs, 7-inch reel
QPP2209EVB01	Evaluation Board

Absolute Maximum Ratings

Parameter	Rating
Incident Power, Pulsed ¹ , 50 Ω , 25 °C	46 dBm
Incident Power, Pulsed ¹ , 50 Ω , 85 °C	46 dBm
Incident Power, CW, 50 Ω , 25 °C	37 dBm
Incident Power, CW, 50 Ω , 85 °C	34 dBm
Mounting Temperature (30 s max)	260 °C
Storage Temperature	-40 to 150 °C

Note:

¹ Pulse conditions: PW = 100 μ s, Duty Cycle = 10%

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Recommended Operating Conditions

Parameter	Min	Typ.	Max	Units
Passive – No Bias				
Temperature Range	-40	+25	+85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Parameter	Conditions ⁽¹⁾	Min	Typ.	Max	Units
Operational Frequency Range		8.0		12.0	GHz
Insertion Loss	8 GHz 10 GHz 12 GHz		0.32 0.35 0.47		dB
Input Return Loss	8 GHz 10 GHz 12 GHz		25 21 15		dB
Output Return Loss	8 GHz 10 GHz 12 GHz		30 21 15		dB
Flat Leakage Power at $P_{IN} > 30$ dBm (Pulse)	8 GHz 10 GHz 12 GHz		18.2 18.0 18.2		dBm
Pulse Recovery Time			<30		ns
Spike Leakage			20.5		dBm
Insertion Loss Temperature Coefficient			0.004		dB/ °C

Notes:

1. Test conditions unless otherwise noted: Temp = +25 °C, 50 Ω system. S-Parameter CW, Power Pulse Parameters: PW= 100 μ s, Duty Cycle = 10%

Thermal and Reliability Information




Parameter	Test Conditions	Value	Units
Incident Power (RF Operational Life Test ⁽¹⁾)	10 GHz Pulsed, PW=100 μ s, DC=10%, 50 Ω , 25 °C	40	W

Notes:

1. Test terminated after 100 hours.







Performance Plots – Small Signal

Test conditions unless otherwise noted: Temp.=+25 °C, CW

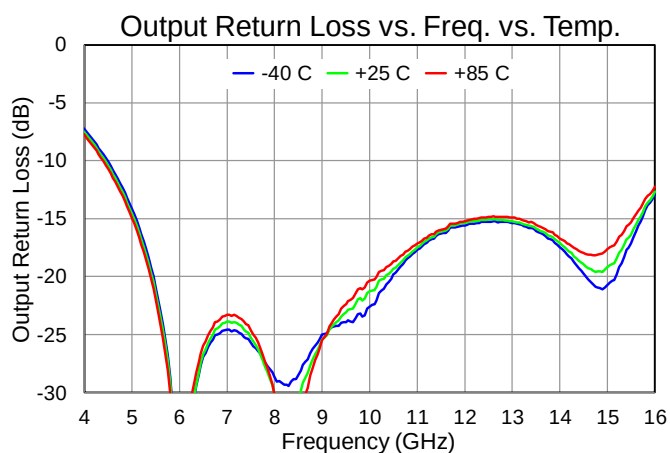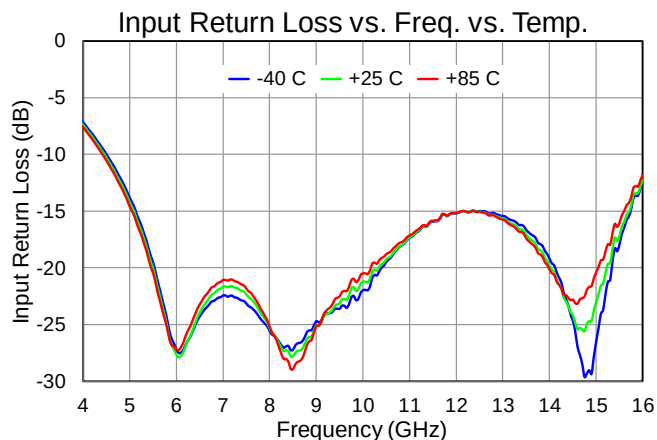
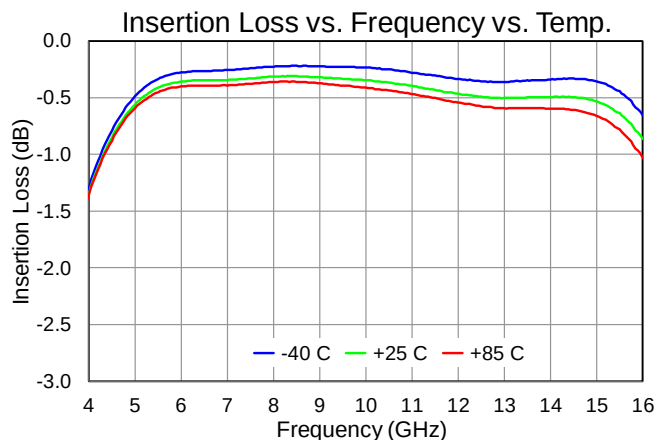


Performance Plots – Large Signal

Test conditions unless otherwise noted: Pulsed RF: PW = 100us, DC = 10%; Temp.=+25 °C

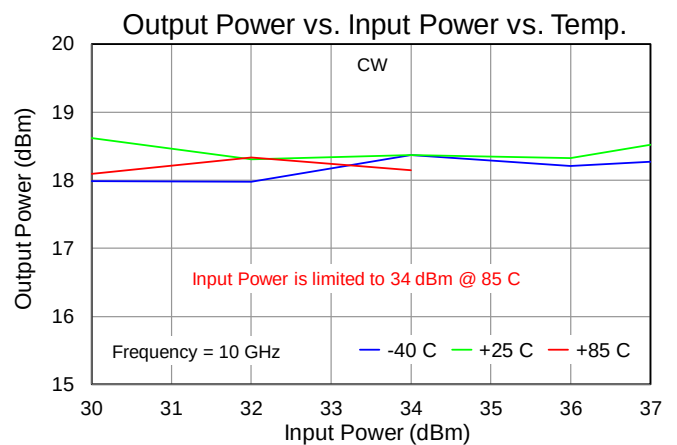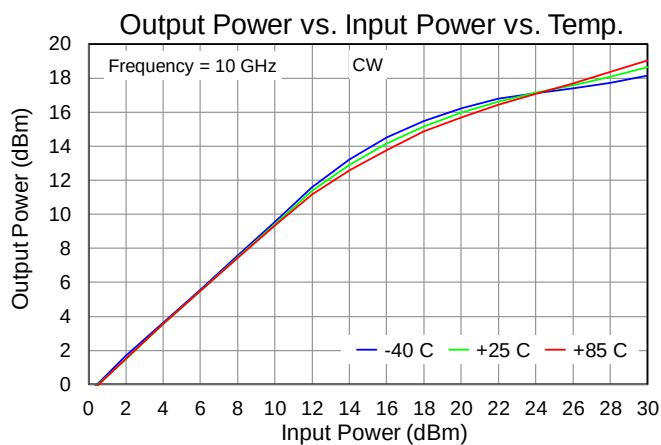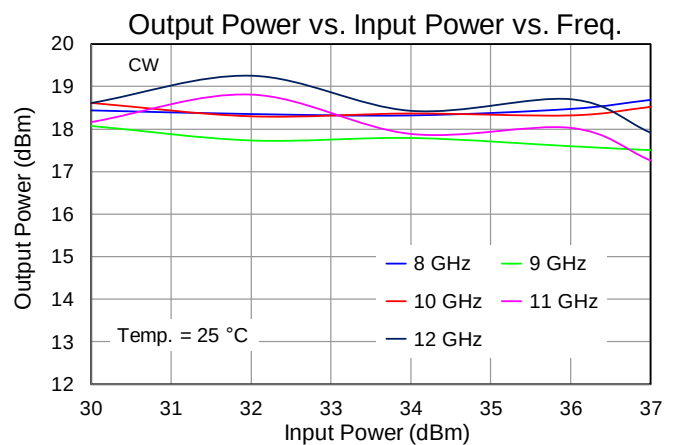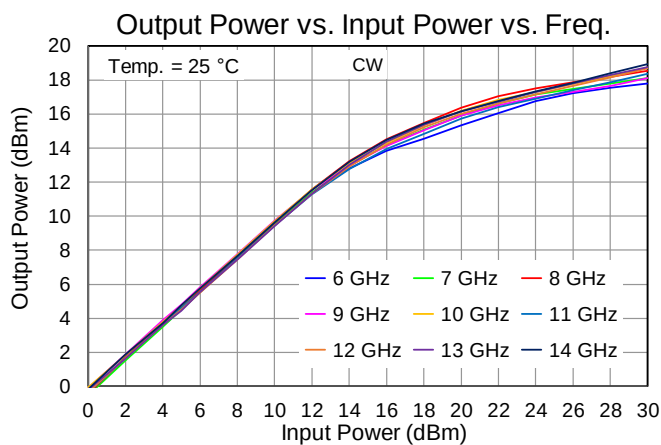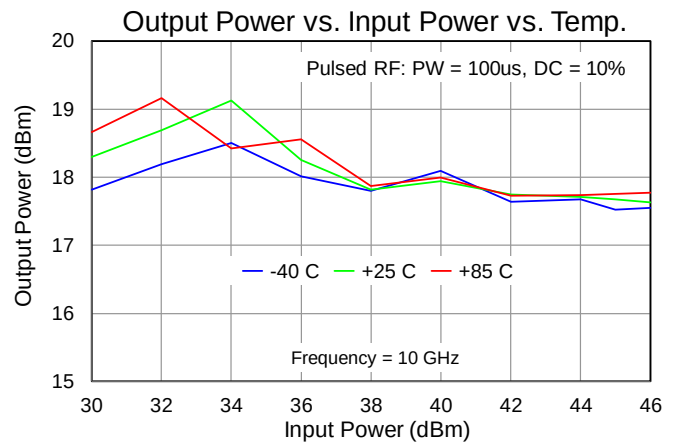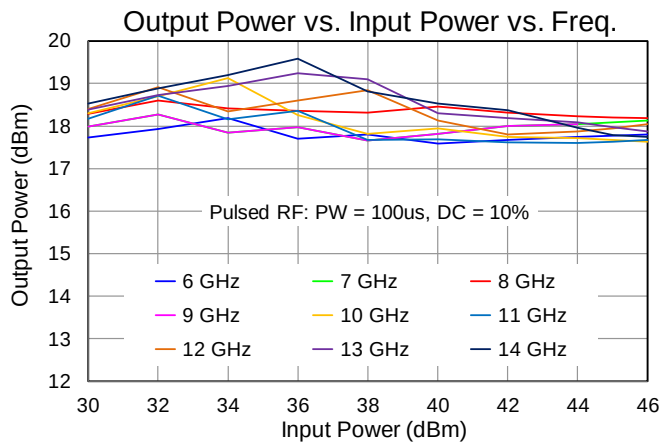

Application Circuit and Evaluation Board (EVB) and Mounting Detail

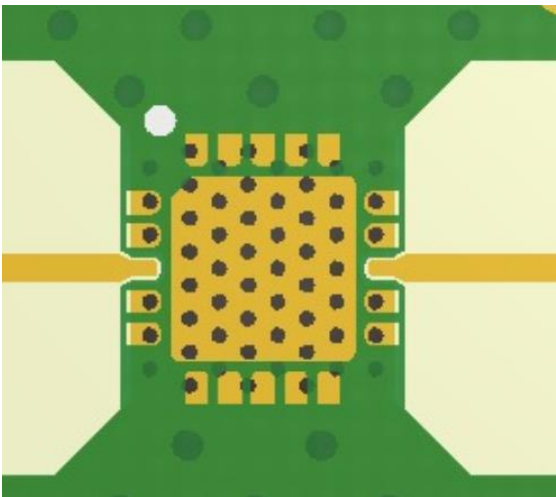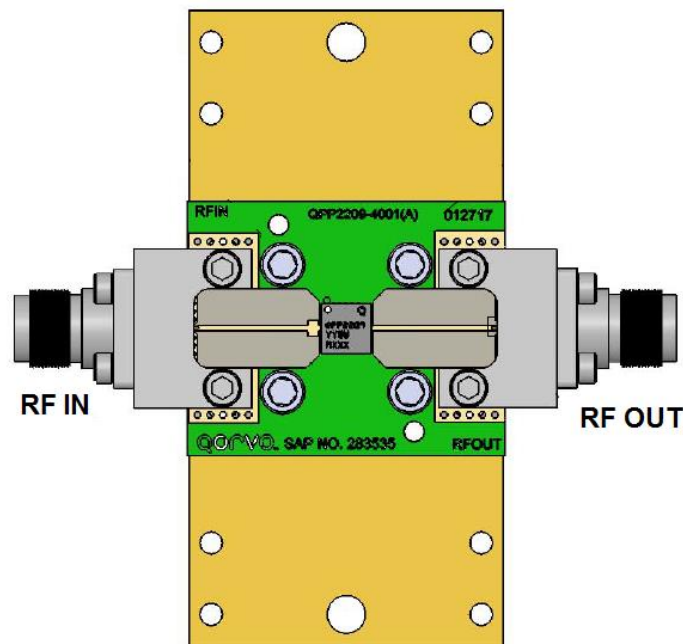


- Notes:
- 1. See Evaluation Board PCB Information for material and stack up.

Evaluation Board PCB Information

Layer Stack Legend					
Material	Layer	Thickness	Dielectric Material	Type	Legend
	SILKSCREEN_TOP				Legend
Surface Material	SOLDERMASK_TOP	0.4mil	Solder Resist		Solder Mask
Copper	METAL1_TOP	1.3mil			Signal
Core		8.0mil	ROGERS 4003C	Dielectric	
Copper	METAL2_BOT	1.3mil			Signal
Total thickness: 11mil					

Package Marking, Pad Configuration and Description

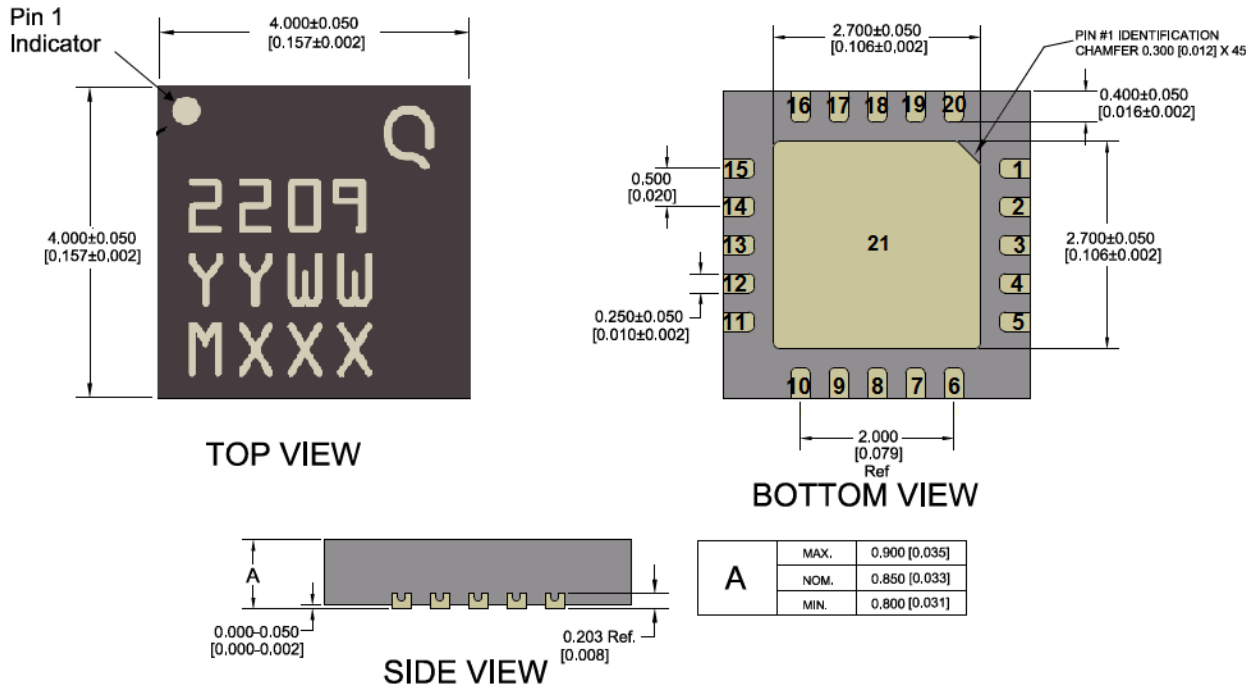

LASER MARK NOTES:

- 2209 IS PART #
- YY IS THE LAST TWO DIGITS OF THE CALENDAR YEAR
- WW IS THE WEEK NUMBER OF THE ASSEMBLY LOT START
- MXXX IS THE BATCH ID

NOTES: UNLESS OTHERWISE SPECIFIED;

1. TESTED QPP2209
2. PACKAGE IS MOLD ENCAPSULATED.
3. PACKAGE EXPOSED METALLIZATION ARE GOLD PLATED.

UNLESS OTHERWISE
SPECIFIED: DIMENSIONS ARE IN mm [INCHES]

.XX = ± .25 [.001]
TOLERANCES .XXX = ± .100 [.004] ANGLES = 0.5 °
.XXXX = ± .0254 [.001]


Pad No.	Label	Description
1, 2, 4–12, 14–20	NC	No connection; may be grounded if desired
3	RF Input	RF Input, matched to 50 Ohms, not DC blocked
13	RF Output	RF Output, matched to 50 Ohms, not DC blocked
21 (Slug)	GND	On PCB, multiple copper-filled vias should be employed under the center pad to minimize inductance and thermal resistance

NOTE: The RF Input and RF Output ports are not interchangeable.

Assembly Notes

1. Compatible with lead-free soldering process with 260°C peak reflow temperature.
2. The use of no-clean solder to avoid washing after soldering is recommended.
3. Contact plating: Ni-Pd-Au

Recommended Soldering Profile

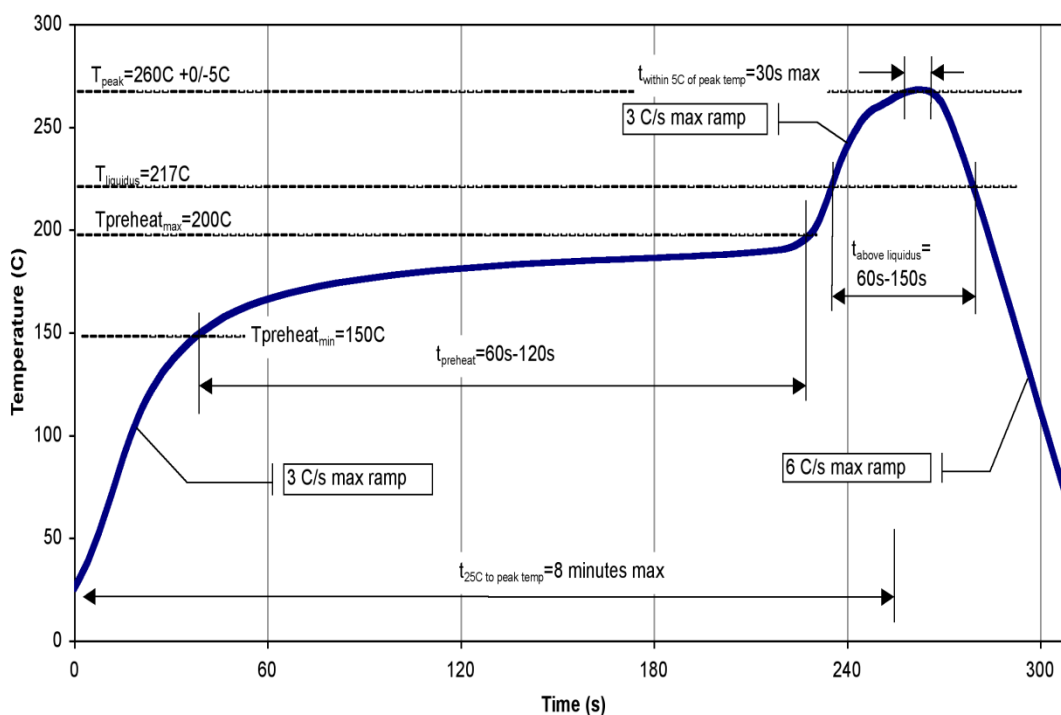

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1C	ANSI/ESDA / JEDEC JS-001
ESD – Charged Device Model (CDM)	Class C3	ANSI/ESDA/JEDEC JS-002
MSL – Moisture Sensitivity Level	Level 3	IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2020 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru