

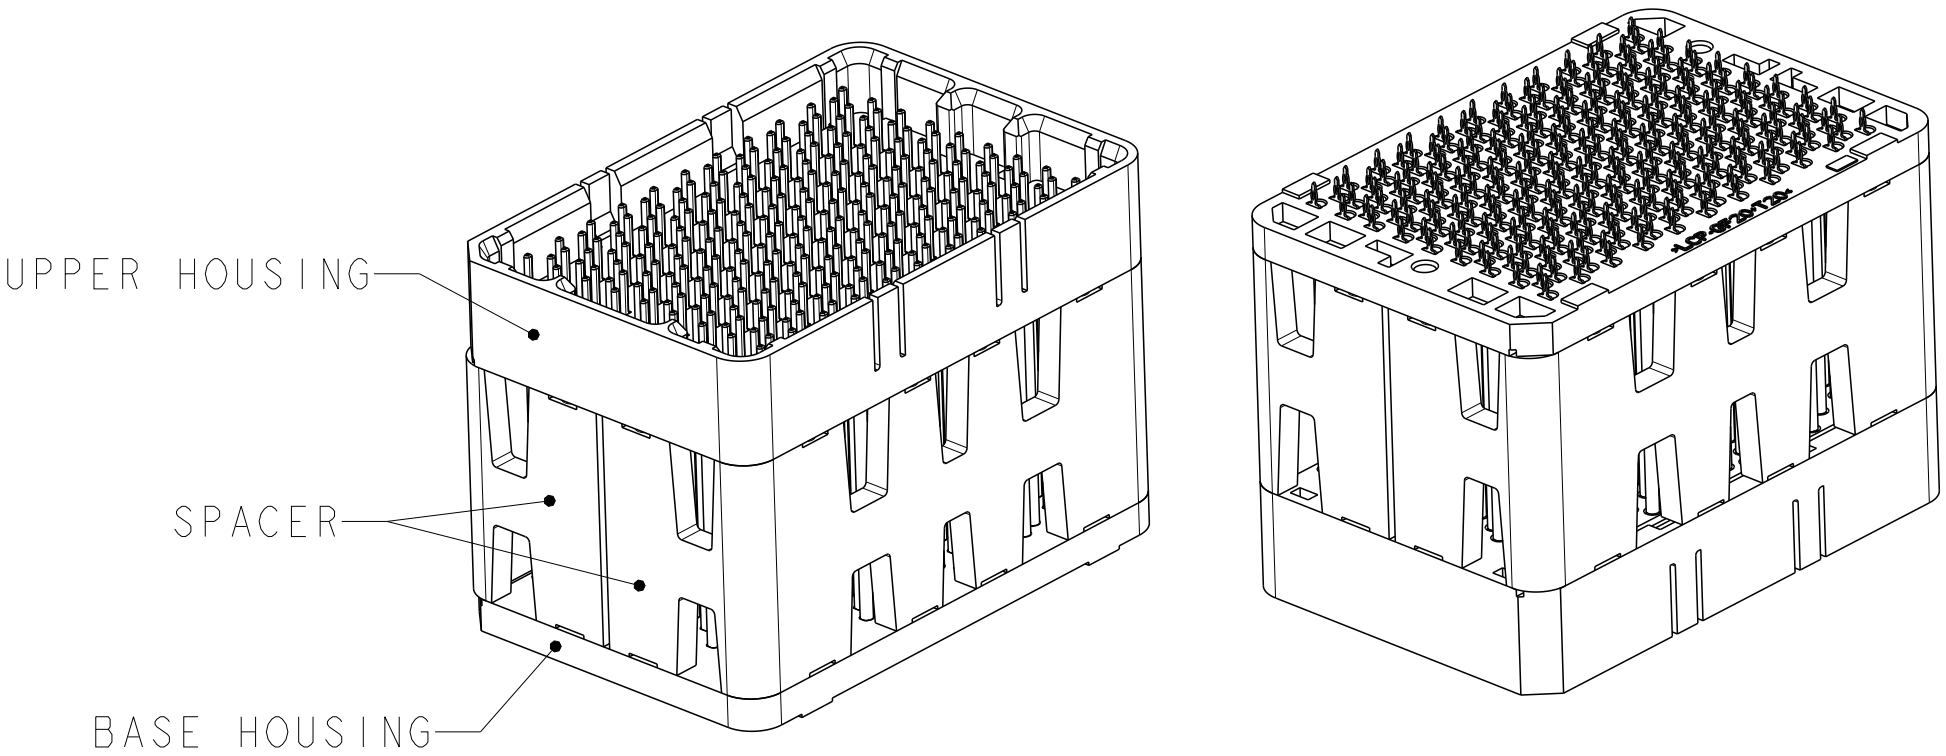




LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
		A	REVISED PER ECO-12-018201			11OCT2012	KH	MH	

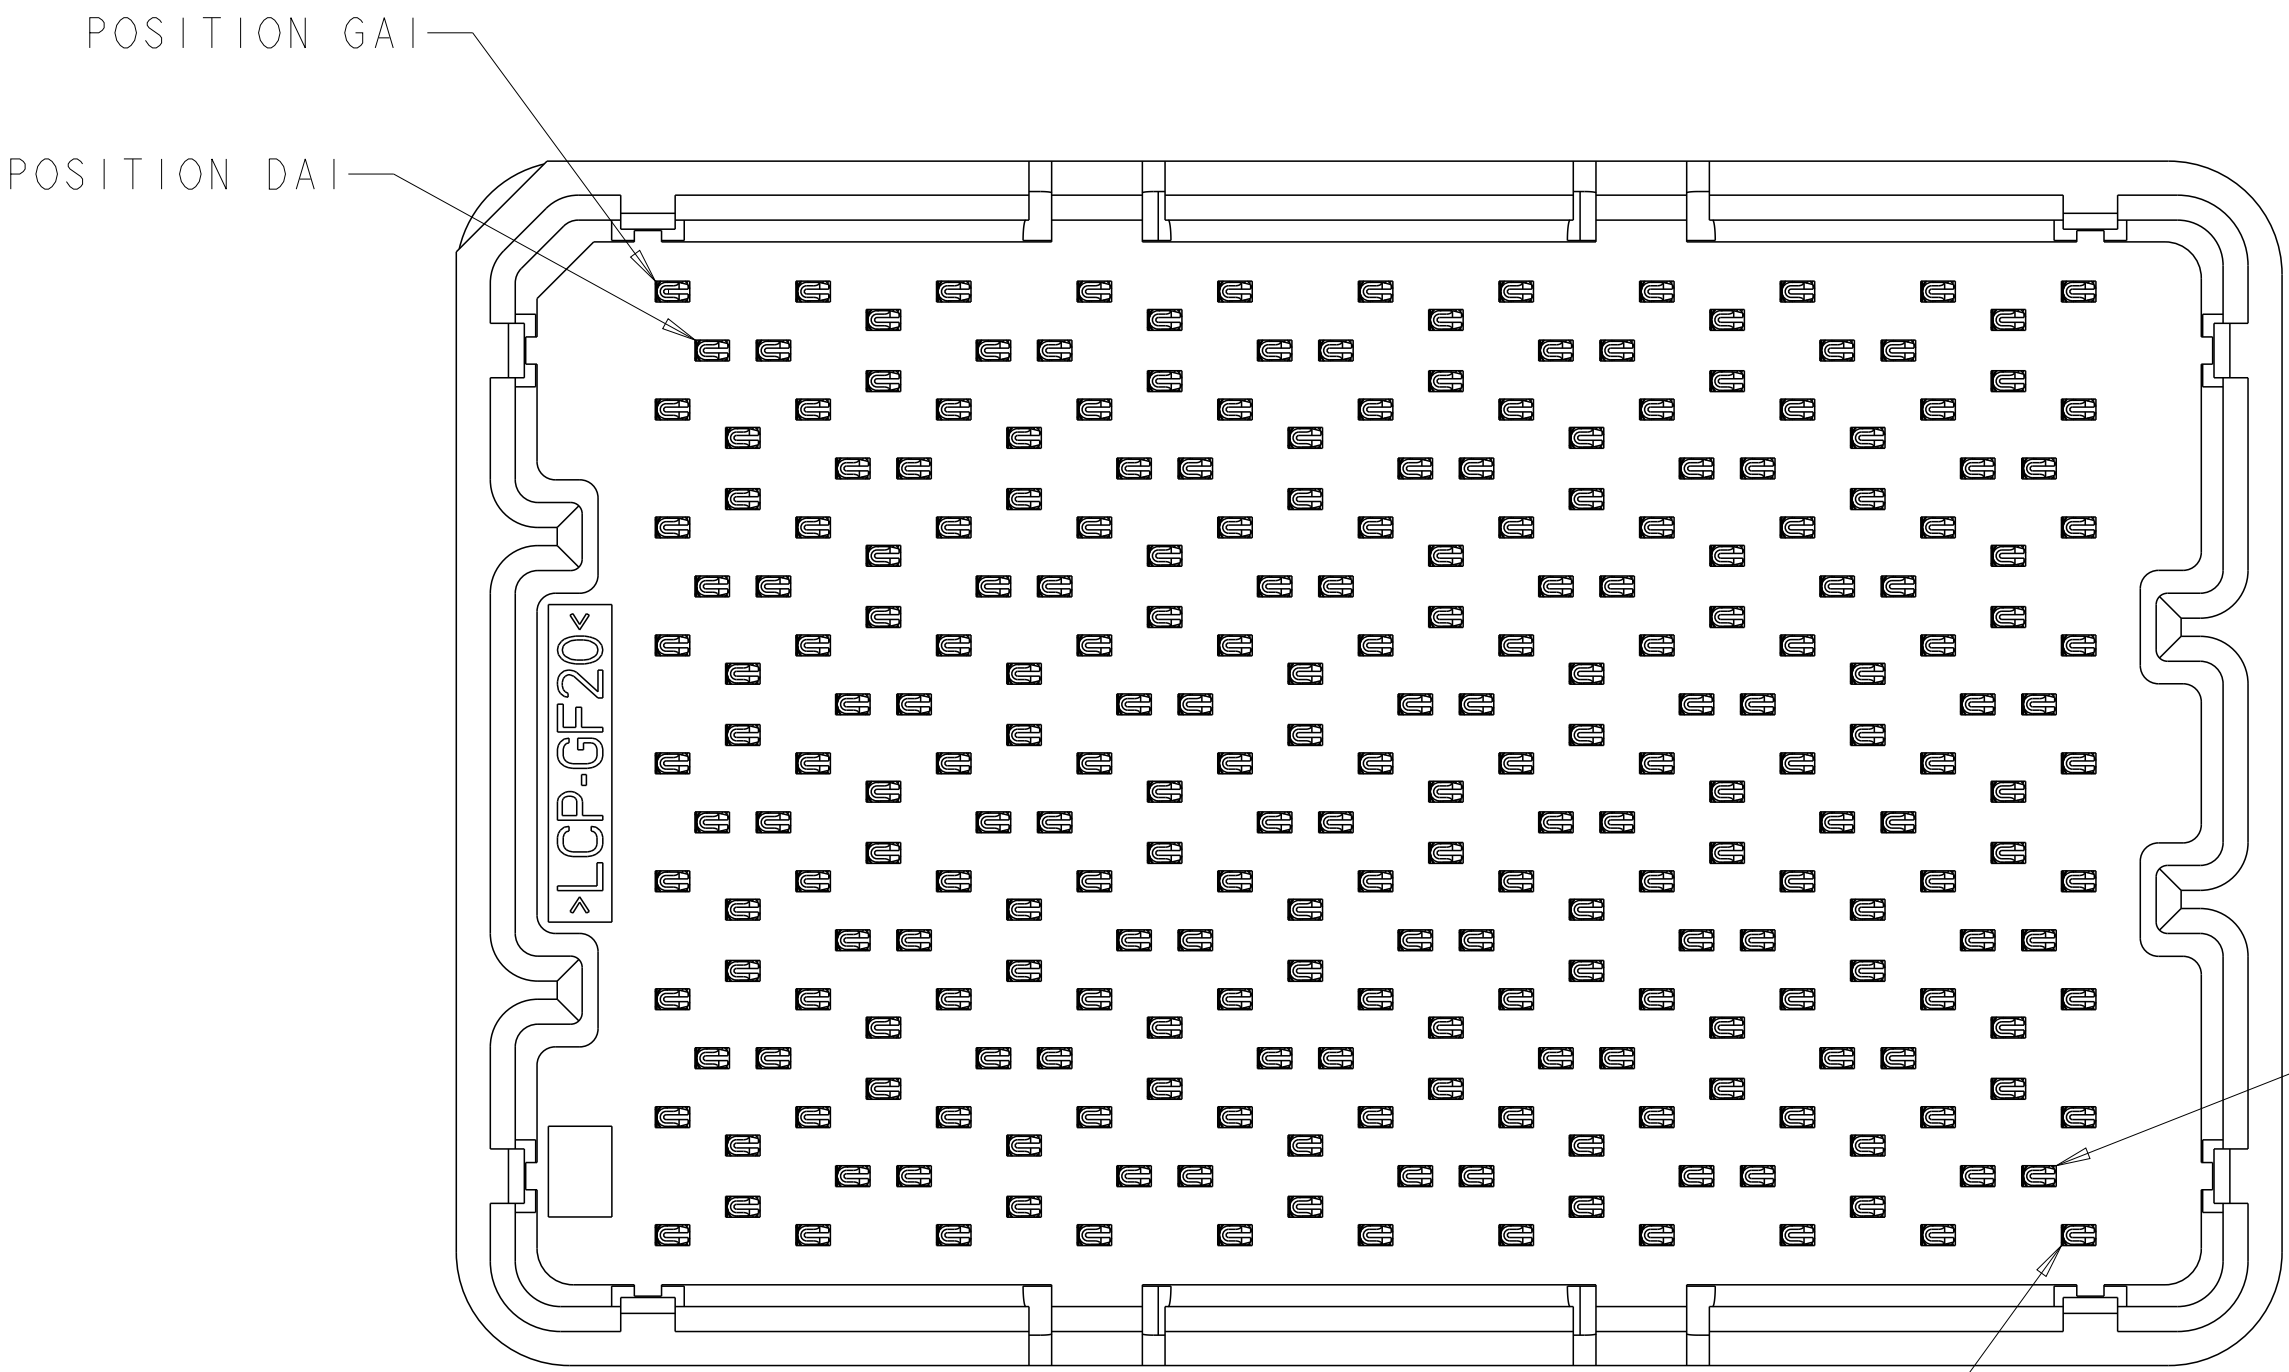

ISOMETRIC VIEW
TYPICAL CONFIGURATION FOR 14mm THRU 42mm
28mm SHOWN
SCALE 2:1

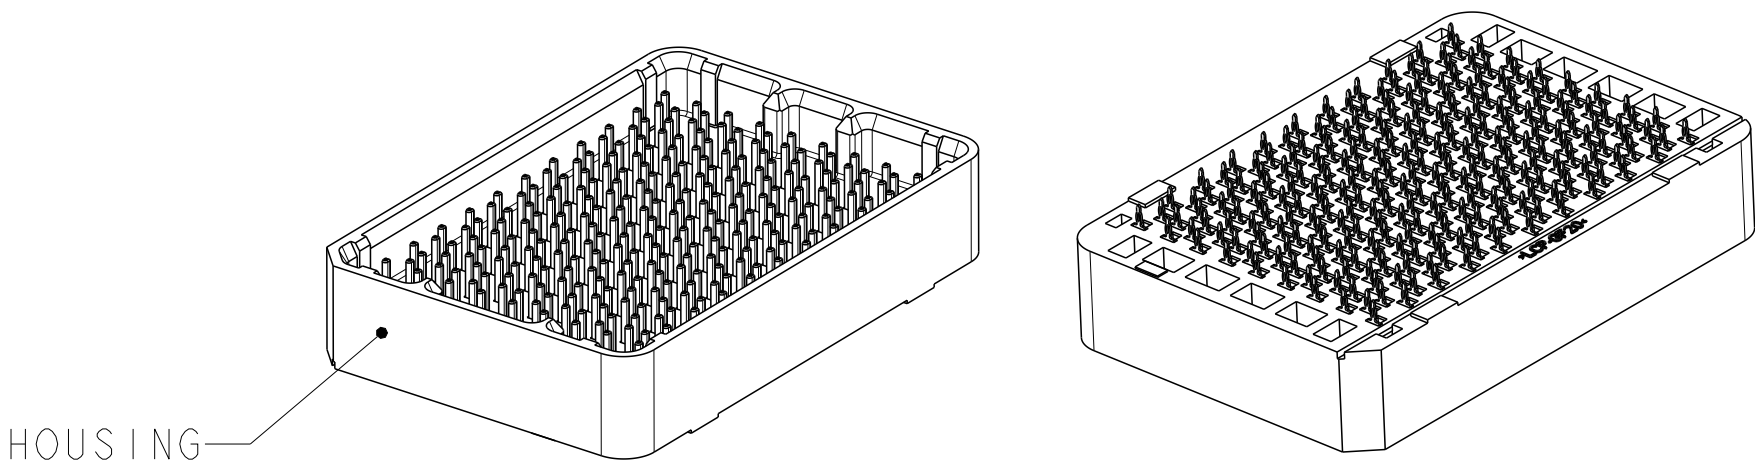

ISOMETRIC VIEW
TYPICAL CONFIGURATION FOR 8mm THRU 13mm
8mm SHOWN
SCALE 2:1

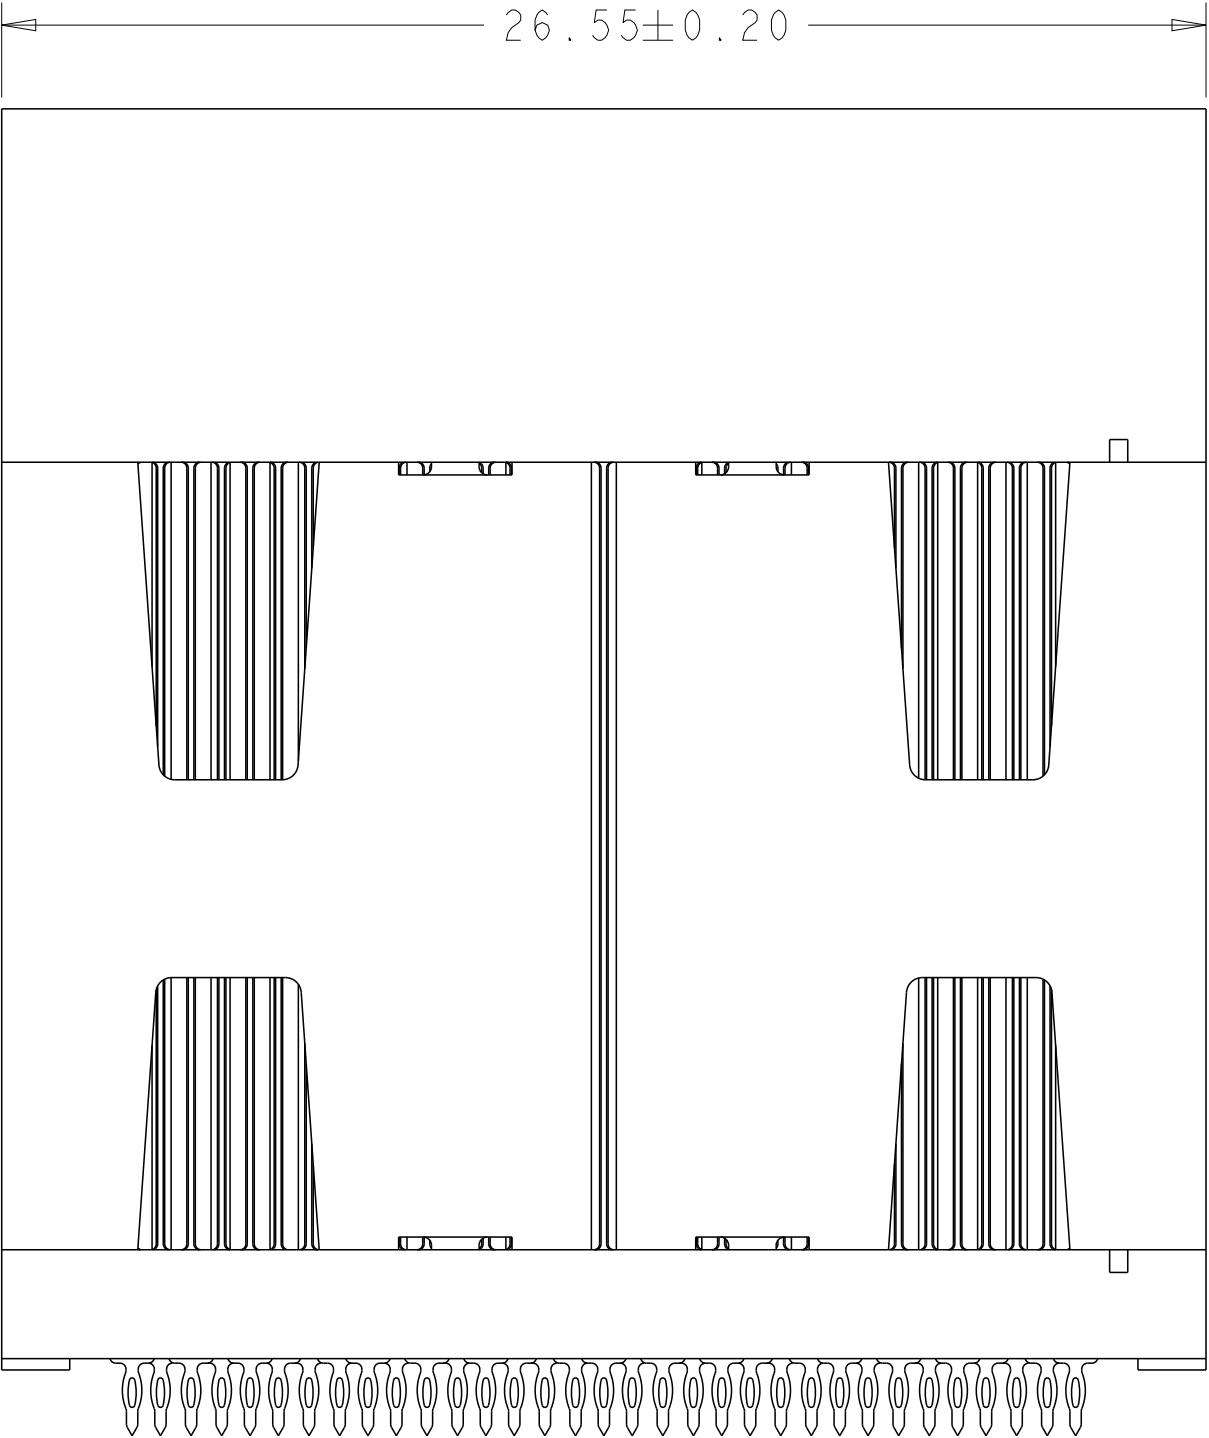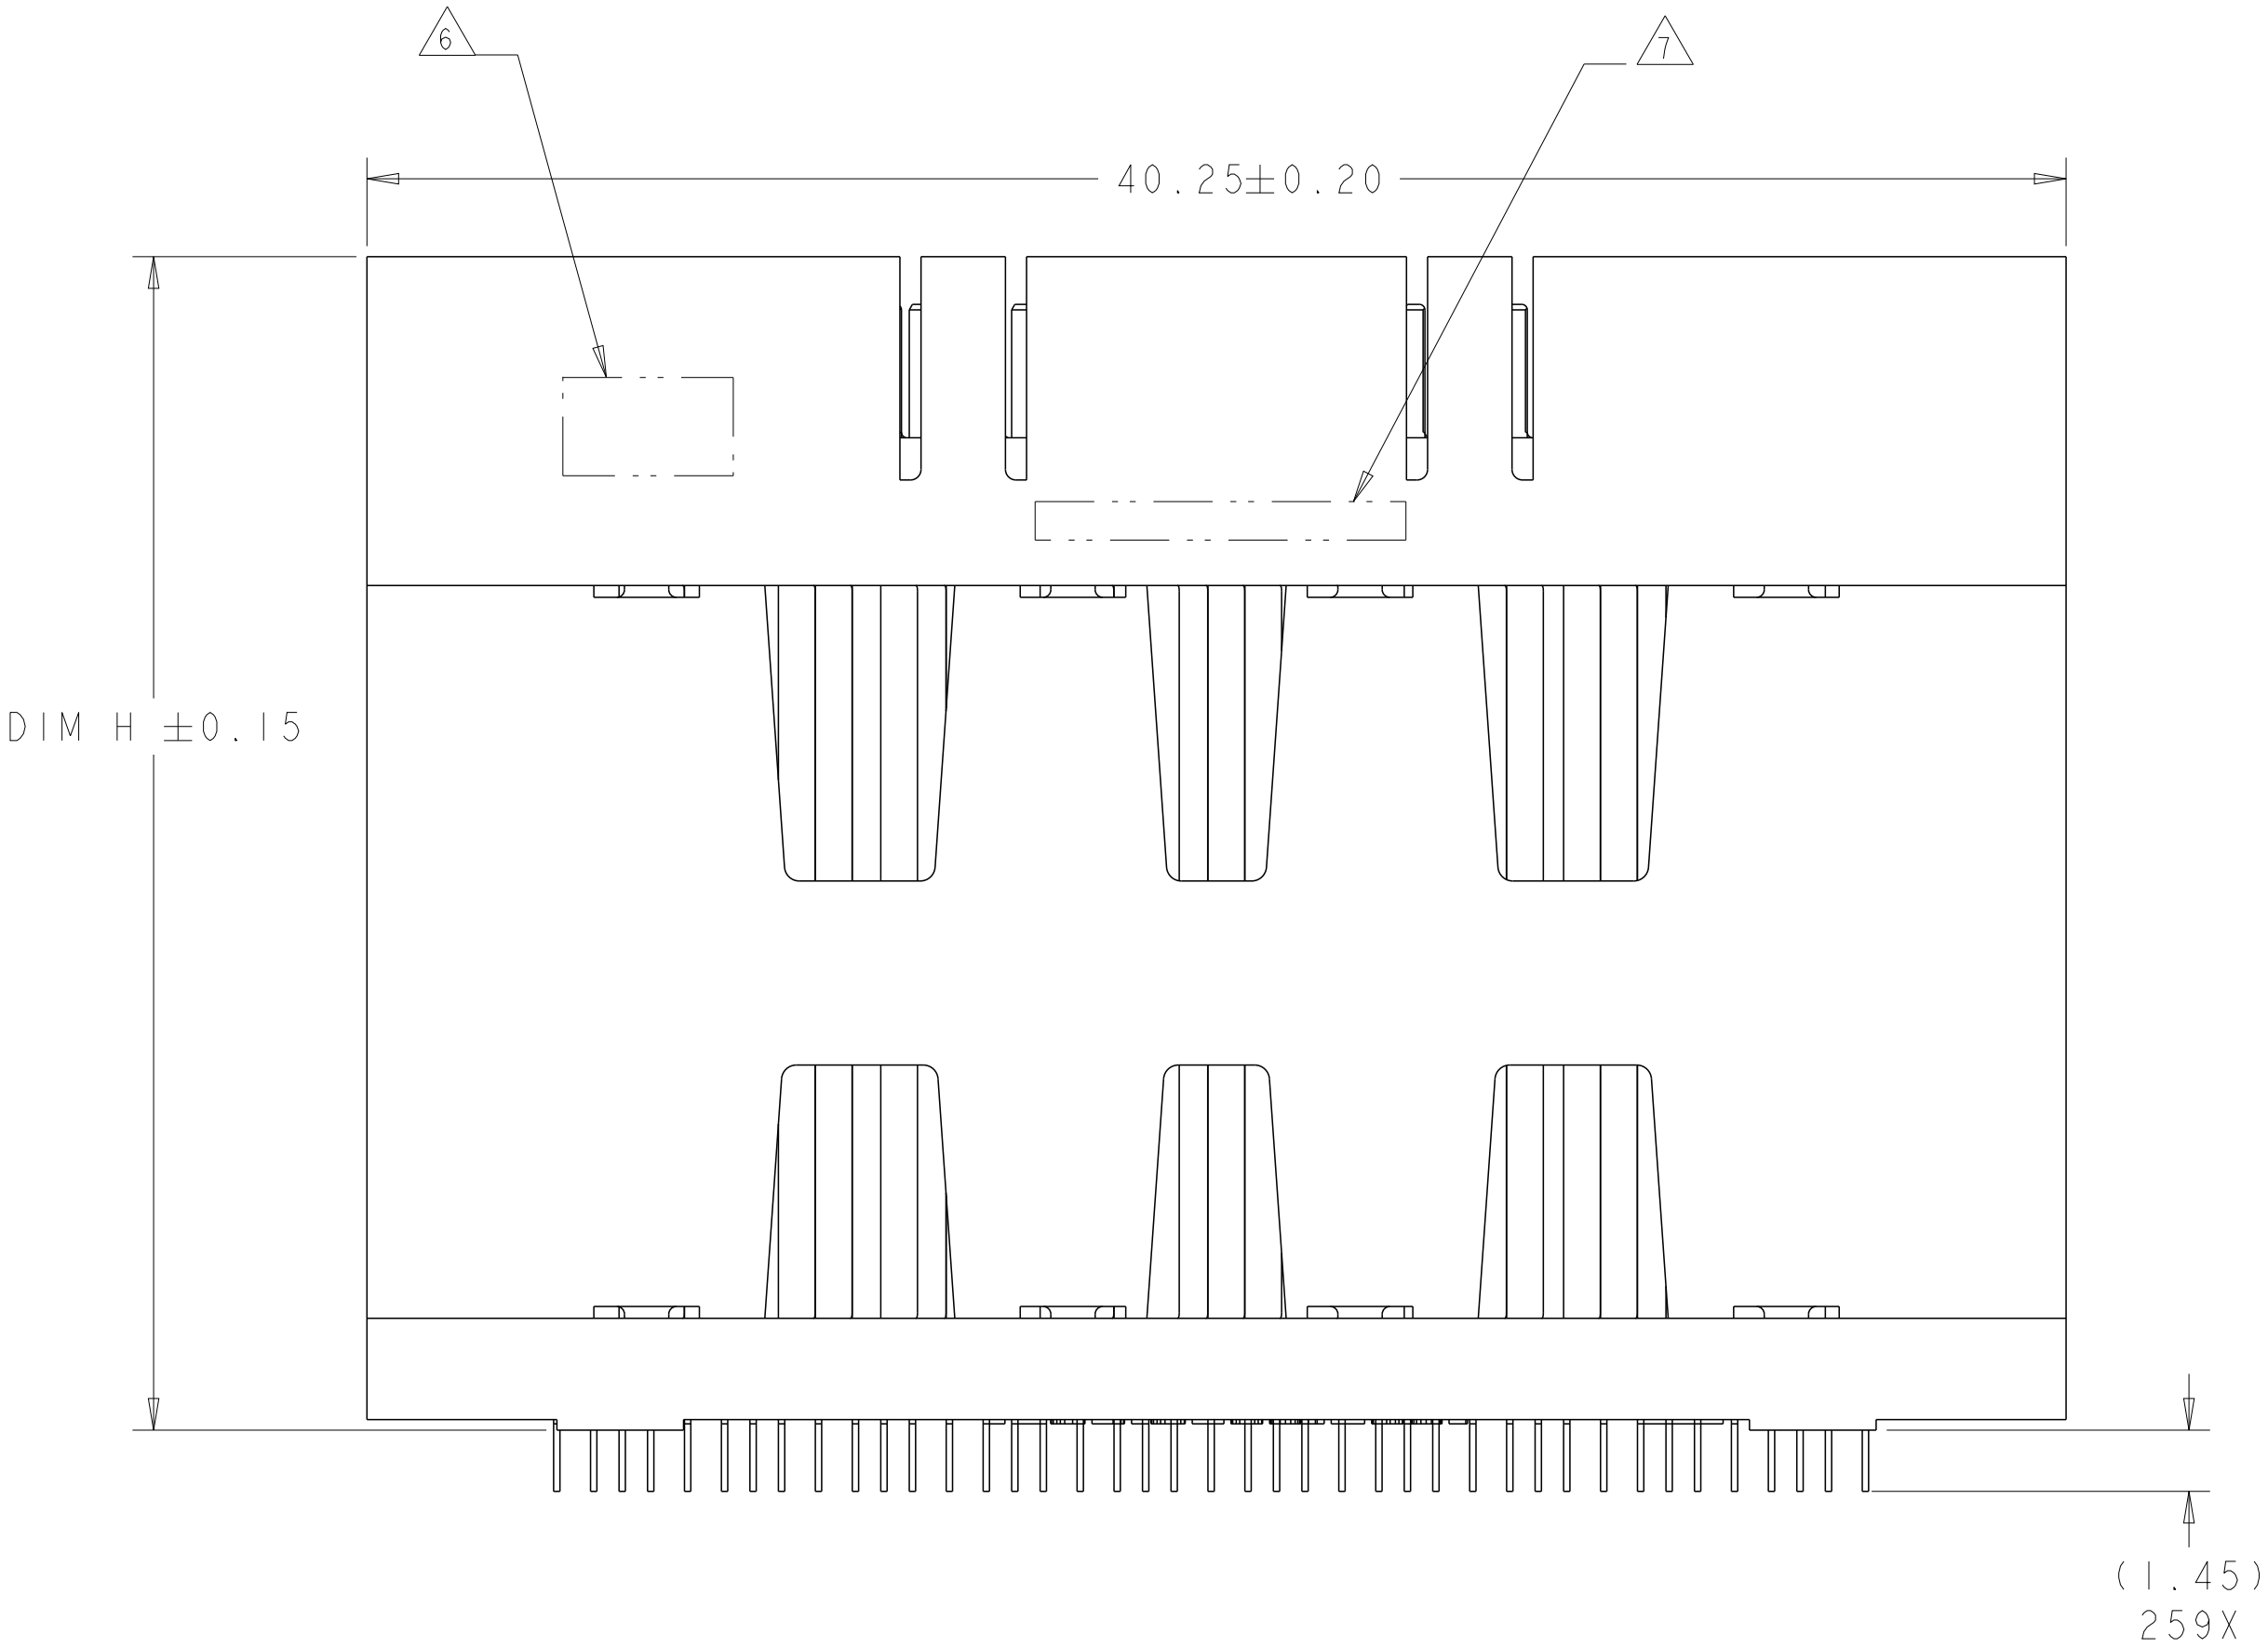

- 1 MATERIAL:
BASE HOUSING, UPPER HOUSING, ORGANIZER,
AND SPACER: THERMOPLASTIC, FLAMMABILITY
RATING UL94-V0
CONTACT: COPPER ALLOY
- 2 CONTACT PLATING: 0.076µm MIN GOLD OVER 0.69µm
MIN PALLADIUM NICKEL, OVER 2.54-5.08µm NICKEL
ON MATING AREA. 0.50-2.54µm 93/7 TIN-LEAD,
OVER 1.27-5.08µm NICKEL ON TAIL AREA.
PORE BLOCKER APPLIED TO MATING AREA.
- 3 CONTACT PLATING: 0.076µm MIN GOLD OVER 0.69µm
MIN PALLADIUM NICKEL, OVER 2.54-5.08µm NICKEL
ON MATING AREA. 0.50-2.54µm MATTE TIN,
OVER 1.27-5.08µm NICKEL ON TAIL AREA.
PORE BLOCKER APPLIED TO MATING AREA.
- 4 ROWS GA THRU GJ (SHOWN DARKENED) ARE TYPICALLY
USED AS GROUNDS.
- 5 SPECIFIED POSITIONAL TOLERANCE DEFINES HOLE TO
HOLE LOCATION WITHIN HOLE PATTERN. POSITIONAL
TOLERANCE OF HOLE PATTERN TO FIDUCIAL MARKS
OR PCB DATUMS SHALL BE DEFINED BY CUSTOMER.
- 6 AREA RESERVED FOR TE CONNECTIVITY LOGO.
- 7 AREA RESERVED FOR PART NUMBER (X-XXXXXX-X)
AND DATE CODE (YYWW).
- 8 USE CENTERLINES INDICATED ON PCB HOLE PATTERN
TO ESTABLISH ALIGNMENT BETWEEN HEADER AND
RECEPTACLE BOARDS.
- 9 PLATED THROUGH HOLE REQUIREMENTS:
HOLE SIZE PRIOR TO PLATING = Ø0.420±0.013
COPPER PLATING THICKNESS = 0.038±0.013
CALCULATED FINISHED HOLE SIZE = Ø0.344±0.039
THESE DIMENSIONS APPLY TO THE TOP 1.25mm OF
THE PCB THICKNESS FROM THE CONNECTOR MOUNTING
SIDE.
- 10 CONTACT SALES FOR AVAILABILITY OF THIS STACK
HEIGHT.

SIZE 2 HOUSING *
80 DIFFERENTIAL PAIRS
259 TOTAL SIGNAL CONTACTS

* SIZE 1 AND SIZE 3 ARE ALSO AVAILABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. RINGLER 29AUG2008	 TE Connectivity			
		CHK D. TROUT 29AUG2008				
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD J. FEDDER 29AUG2008	NAME		
		1 P. PLC ±.1 2 P. PLC ±0.13 3 P. PLC ±0.013 4 P. PLC ANGLES ±.1 FINISH -	PRODUCT SPEC 108-2375 APPLICATION SPEC 114-13249 WEIGHT -			
MATERIAL - 		HEADER ASSEMBLY 80/259 SIGNAL STRADA MESA MEZZANINE CONNECTOR		RESTRICTED TO -		
		SIZE A1	CAGE CODE 100779		DRAWING NO C=2057360	
Customer Drawing		SCALE 6:1	SHEET 1	OF 4	REV A	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

		41.8	42mm	MATTE Sn	9-2057360-2
		40.8	41mm	MATTE Sn	9-2057360-1
	YES	39.8	40mm	MATTE Sn	9-2057360-0
		38.8	39mm	MATTE Sn	8-2057360-9
		37.8	38mm	MATTE Sn	8-2057360-8
		36.8	37mm	MATTE Sn	8-2057360-7
		35.8	36mm	MATTE Sn	8-2057360-6
		34.8	35mm	MATTE Sn	8-2057360-5
		33.8	34mm	MATTE Sn	8-2057360-4
		32.8	33mm	MATTE Sn	8-2057360-3
		31.8	32mm	MATTE Sn	8-2057360-2
		30.8	31mm	MATTE Sn	8-2057360-1
		29.8	30mm	MATTE Sn	8-2057360-0
		28.8	29mm	MATTE Sn	7-2057360-9
	YES	27.8	28mm	MATTE Sn	7-2057360-8
		26.8	27mm	MATTE Sn	7-2057360-7
		25.8	26mm	MATTE Sn	7-2057360-6
		24.8	25mm	MATTE Sn	7-2057360-5
		23.8	24mm	MATTE Sn	7-2057360-4
	YES	22.8	23mm	MATTE Sn	7-2057360-3
		21.8	22mm	MATTE Sn	7-2057360-2
		20.8	21mm	MATTE Sn	7-2057360-1
		19.8	20mm	MATTE Sn	7-2057360-0
		18.8	19mm	MATTE Sn	6-2057360-9
		17.8	18mm	MATTE Sn	6-2057360-8
		16.8	17mm	MATTE Sn	6-2057360-7
		15.8	16mm	MATTE Sn	6-2057360-6
		14.8	15mm	MATTE Sn	6-2057360-5
		13.8	14mm	MATTE Sn	6-2057360-4
		12.8	13mm	MATTE Sn	6-2057360-3
		11.8	12mm	MATTE Sn	6-2057360-2
		10.8	11mm	MATTE Sn	6-2057360-1
		9.8	10mm	MATTE Sn	6-2057360-0
	YES	8.8	9mm	MATTE Sn	5-2057360-9
		7.8	8mm	MATTE Sn	5-2057360-8
FINISH	TOOLED	DIM H	STACK HEIGHT	CONTACT TAIL PLATING	PART NUMBER

		41.8	42mm	Sn/Pb	4-2057360-2
		40.8	41mm	Sn/Pb	4-2057360-1
	YES	39.8	40mm	Sn/Pb	4-2057360-0
		38.8	39mm	Sn/Pb	3-2057360-9
		37.8	38mm	Sn/Pb	3-2057360-8
		36.8	37mm	Sn/Pb	3-2057360-7
		35.8	36mm	Sn/Pb	3-2057360-6
		34.8	35mm	Sn/Pb	3-2057360-5
		33.8	34mm	Sn/Pb	3-2057360-4
		32.8	33mm	Sn/Pb	3-2057360-3
		31.8	32mm	Sn/Pb	3-2057360-2
		30.8	31mm	Sn/Pb	3-2057360-1
		29.8	30mm	Sn/Pb	3-2057360-0
		28.8	29mm	Sn/Pb	2-2057360-9
	YES	27.8	28mm	Sn/Pb	2-2057360-8
		26.8	27mm	Sn/Pb	2-2057360-7
		25.8	26mm	Sn/Pb	2-2057360-6
		24.8	25mm	Sn/Pb	2-2057360-5
		23.8	24mm	Sn/Pb	2-2057360-4
	YES	22.8	23mm	Sn/Pb	2-2057360-3
		21.8	22mm	Sn/Pb	2-2057360-2
		20.8	21mm	Sn/Pb	2-2057360-1
		19.8	20mm	Sn/Pb	2-2057360-0
		18.8	19mm	Sn/Pb	1-2057360-9
		17.8	18mm	Sn/Pb	1-2057360-8
		16.8	17mm	Sn/Pb	1-2057360-7
		15.8	16mm	Sn/Pb	1-2057360-6
		14.8	15mm	Sn/Pb	1-2057360-5
		13.8	14mm	Sn/Pb	1-2057360-4
		12.8	13mm	Sn/Pb	1-2057360-3
		11.8	12mm	Sn/Pb	1-2057360-2
		10.8	11mm	Sn/Pb	1-2057360-1
		9.8	10mm	Sn/Pb	1-2057360-0
	YES	8.8	9mm	Sn/Pb	2057360-9
		7.8	8mm	Sn/Pb	2057360-8
FINISH	TOOLED	DIM H	STACK HEIGHT	CONTACT TAIL PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

CHKD. RINGLER 29AUG2008

CHKD. TROUT 29AUG2008

APVD. FEDDER 29AUG2008

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±" 1 PLC ±.13 2 PLC ±.13 3 PLC ±.013 4 PLC ±" ANGLES ±1 FINISH -

MATERIAL -

Customer Drawing

NAME

TE Connectivity

PRODUCT SPEC

108-2375

APPLICATION SPEC

114-13249

WEIGHT -

SIZE A1

CAGE CODE 00779

DRAWING NO. 2057360

RESTRICTED TO -


SCALE 6:1

SHEET 2 OF 4

REV A


LOC		DIST		REVISIONS						
GP	00	P	LTR	DESCRIPTION				DATE	DWN	APVD
		-		SEE SHEET 1				-	-	-

A1 CORNER INDICATORS.

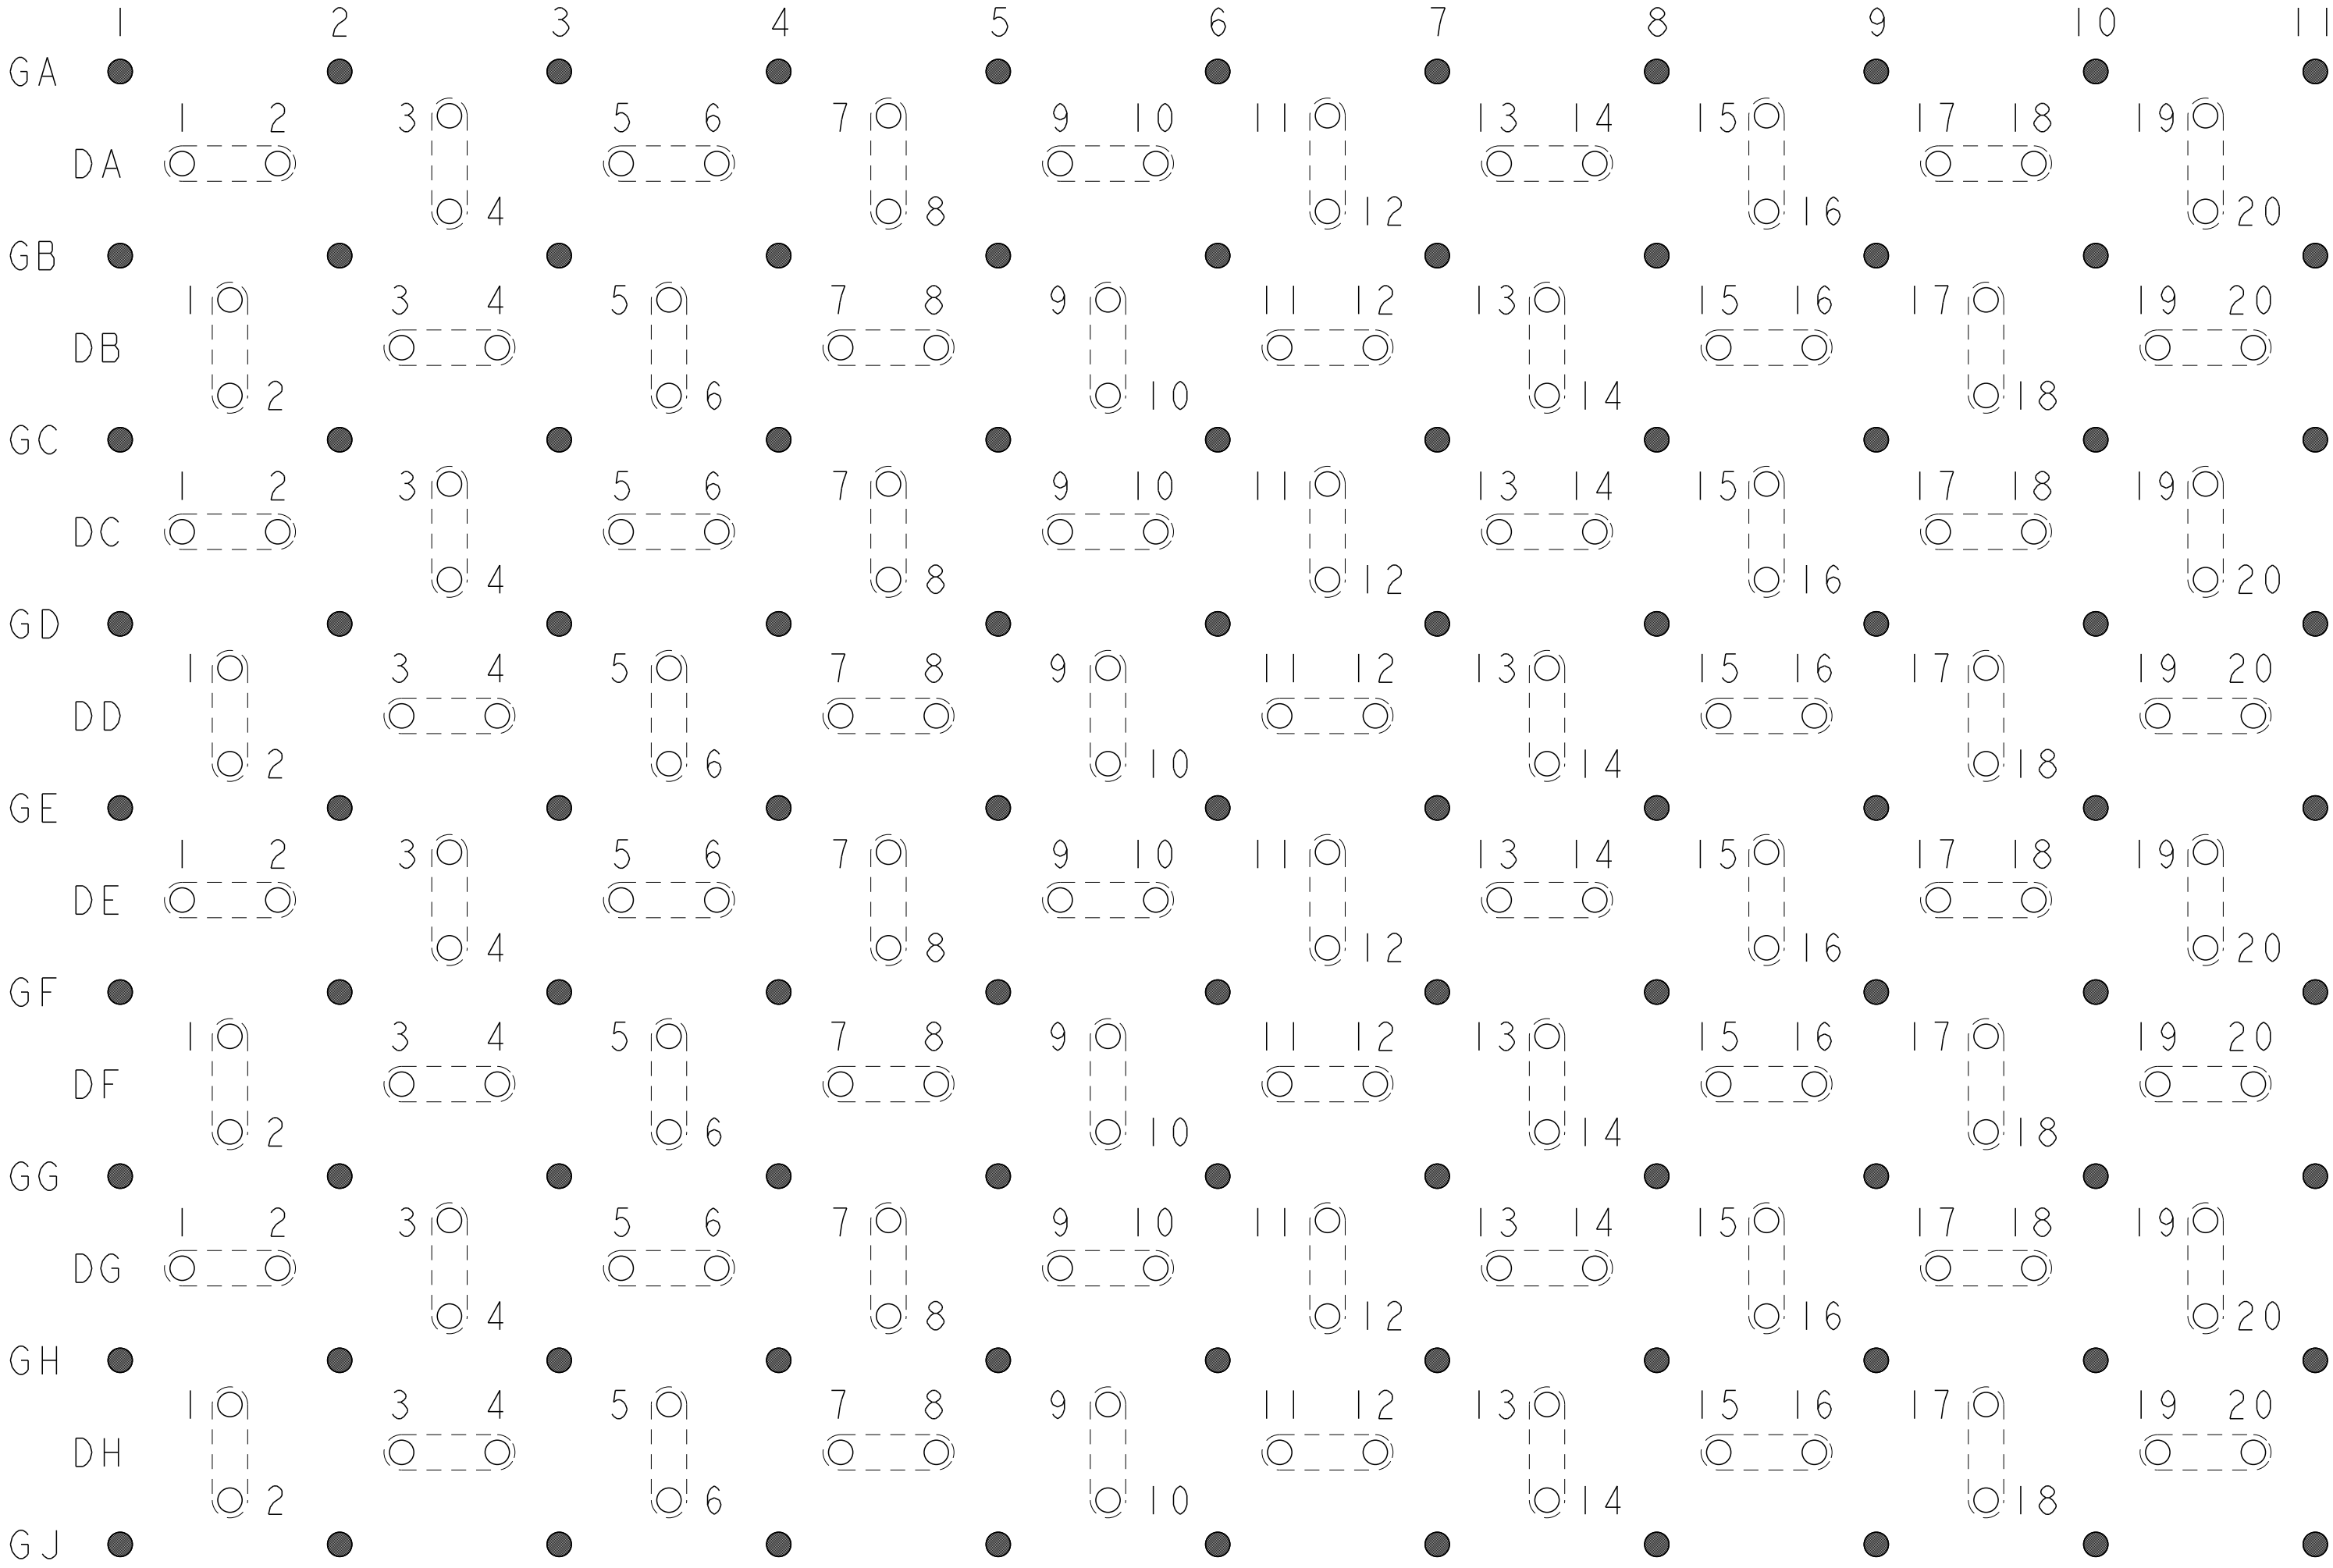

MATED CONNECTOR OUTLINE
SEE SHEET 4 FOR LOCATION TO HOLES

PCB LAYOUT AND PIN IDENTIFICATION 
SHOWN FROM CONNECTOR SIDE
SCALE 12:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	D. RINGLER	29AUG2008	 TE Connectivity				
				CHK	D. TROUT	29AUG2008					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. FEDDER	29AUG2008	NAME		HEADER ASSEMBLY		
mm		0 PLC ±"		PRODUCT SPEC			80/259 SIGNAL		STRADA MESA MEZZANINE CONNECTOR		
		1 PLC ±"		108-2375							
		2 PLC ±0.13		APPLICATION SPEC			RESTRICTED TO				
		3 PLC ±"		114-13249							
MATERIAL		FINISH		WEIGHT			SIZE		CAGE CODE		
-		-		-			A100779		C=2057360		
Customer Drawing				SCALE		6:1		SHEET		3 OF 4	
								REV		A	

4805 (3/11)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru