


NOTES:




1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 26.5 GHz
C. VSWR(RETURN LOSS): 1.10 (26.4 dB), MAX. DC - 6 GHz
1.15 (23.1 dB), MAX. 6 - 10 GHz
1.30 (17.7 dB), MAX. 10 - 18 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 335 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. ENGAGEMENT FORCE: 10 LBS [45 N] MAX.
C. DISENGAGEMENT FORCE: 2 LBS [9 N] MIN.
D. INNER CONTACT RETENTION FORCE: 1.5 LB [7 N] MIN.
E. TEMPERATURE RANGE: -65° C TO 165° C
4. PACKAGING:
A. QUANTITY: TAPE & REEL PACKAGING, 1000 PCS/REEL
B. MARKING: REEL TO BE MARKED:
"AMPHENOL, SMP-MSLD-PCSI8T, AND DATE CODE"

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	29-Jul-19	12481	SV

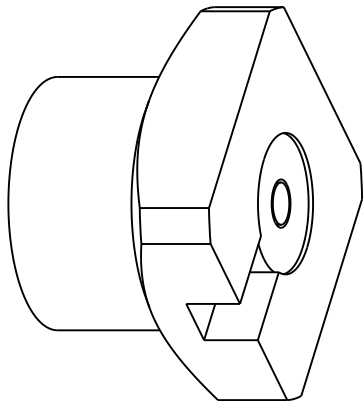

SCALE 8.000

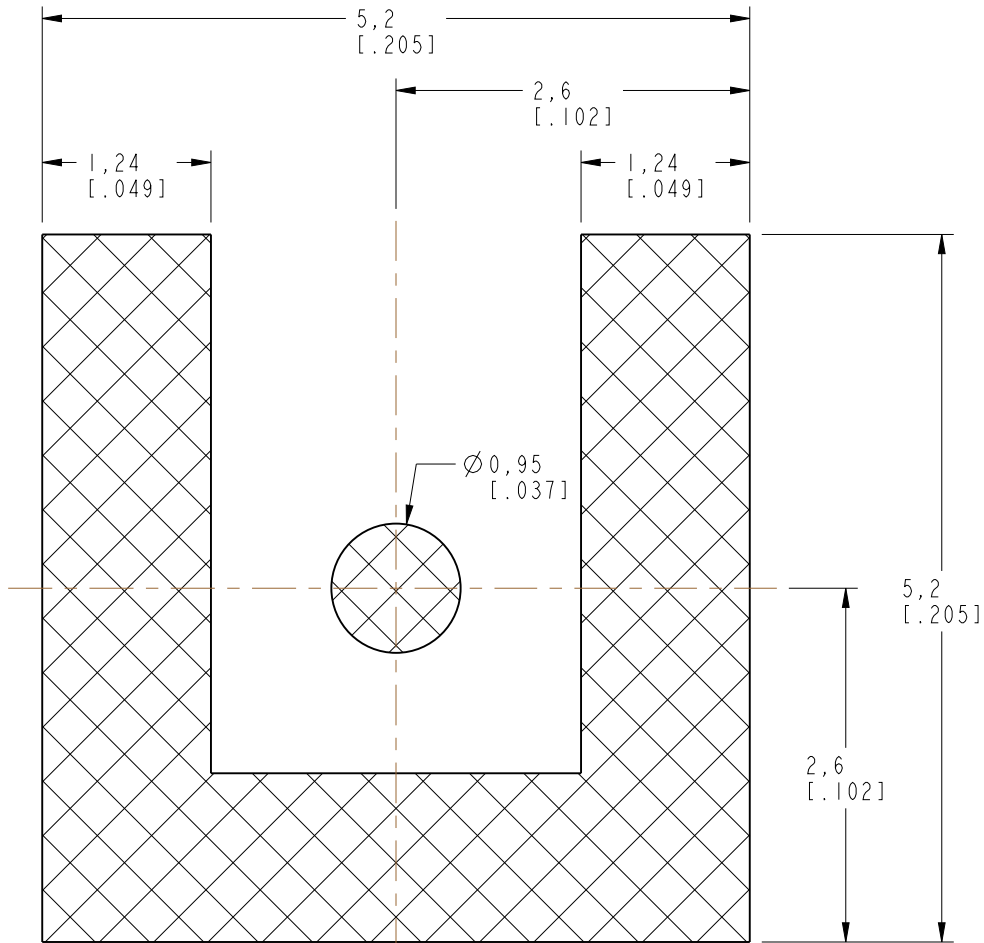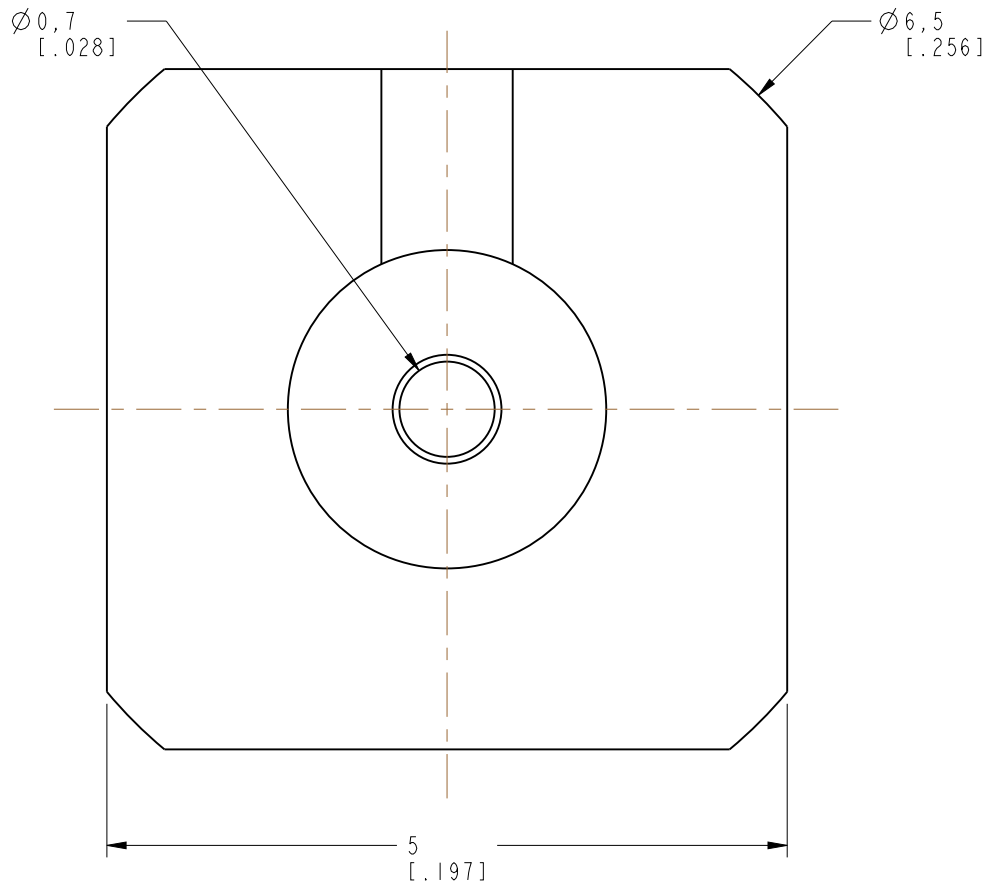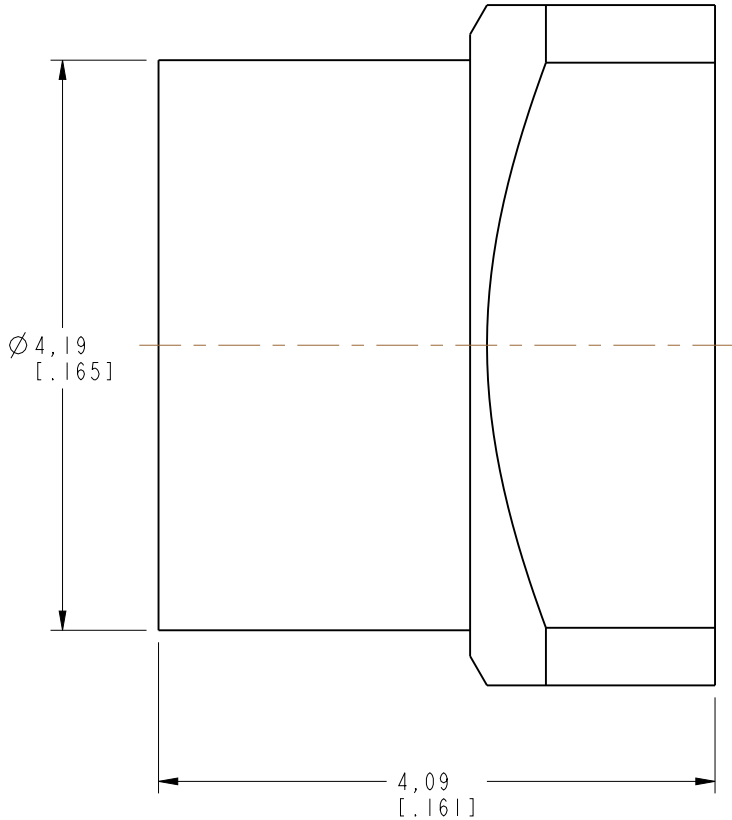

RECOMMENDED PCB PAD LAYOUT

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN S.VO	DATE 27-Mar-19	TITLE SMP JACK PCB SMT RECEPTACLE LIMITED DETENT	Amphenol RF www.amphenolrf.com
	REFERENCE	ENGINEER S.VO	DATE 27-Mar-19		
	EAR# 8532	APPROVED --	DATE --		
	REF: SMP1251DI-001-30GP30G-50	SCALE: 18.0:1.0		SHEET 2 OF 3	
	CONFIGURATION LEVEL: In Work	CAD FILE	DWG SIZE B		REV A
FINISH					DRAWING NO. SMP-MSLD-PCSI8T
					ITEM NO. SMP-MSLD-PCSI8T
					PART NO. SMP-MSLD-PCSI8T

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	29-Jul-19	12481	SV

SMP-MSLD-PCS-18

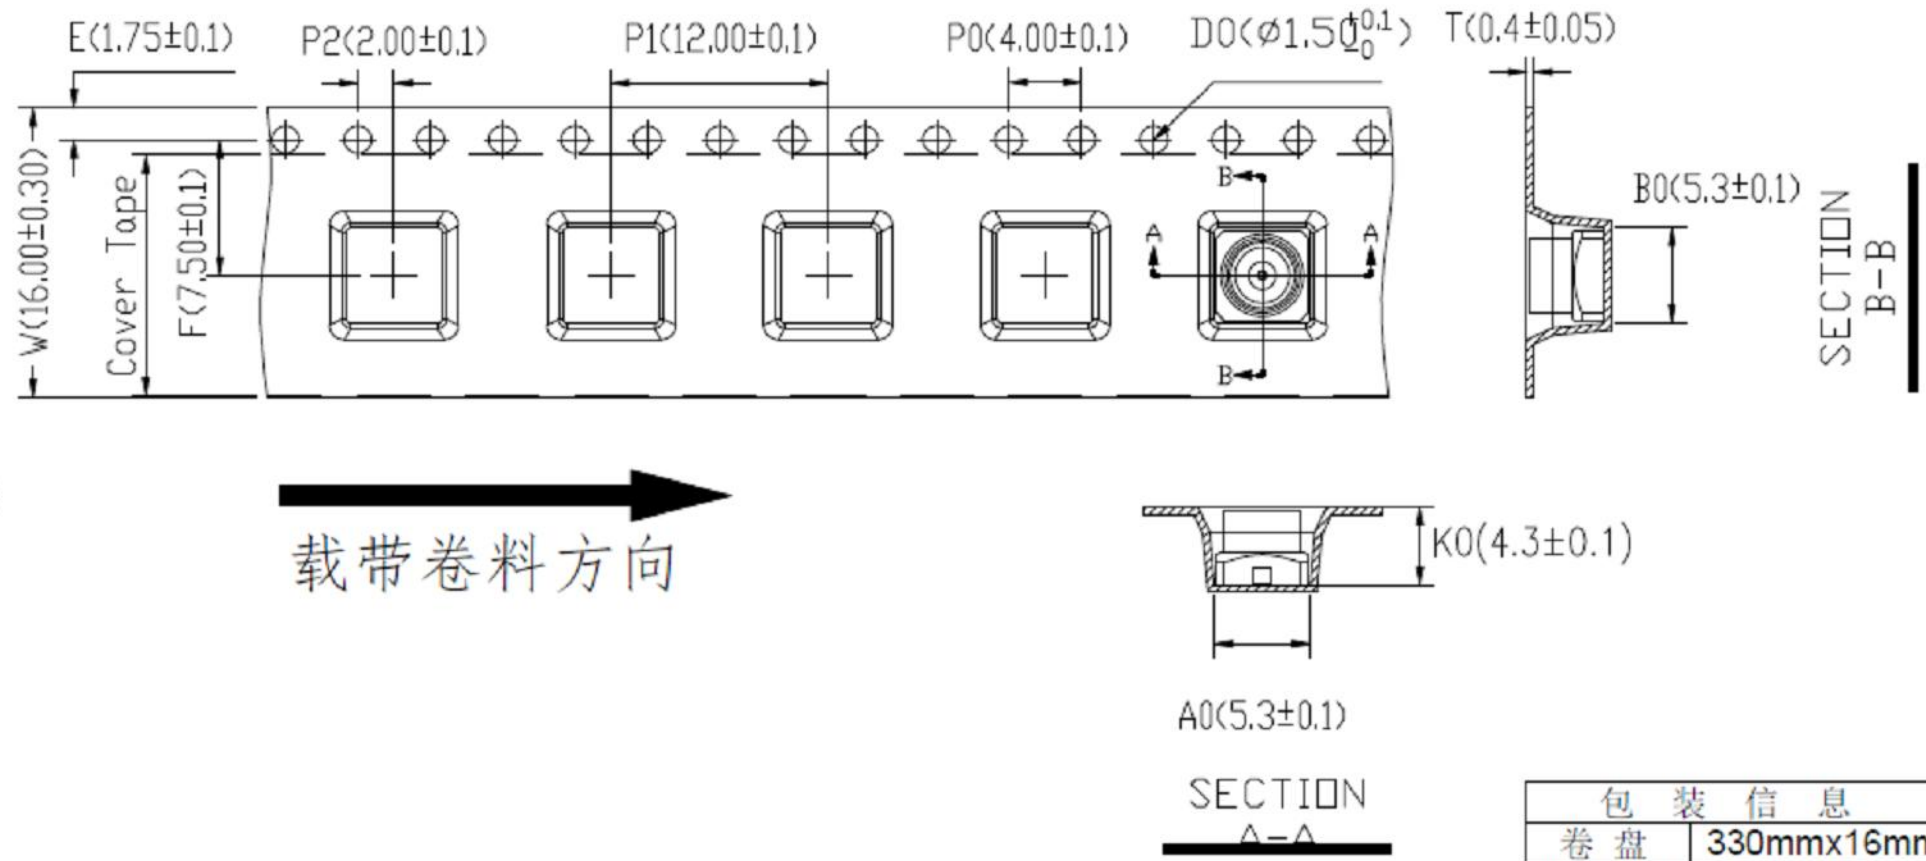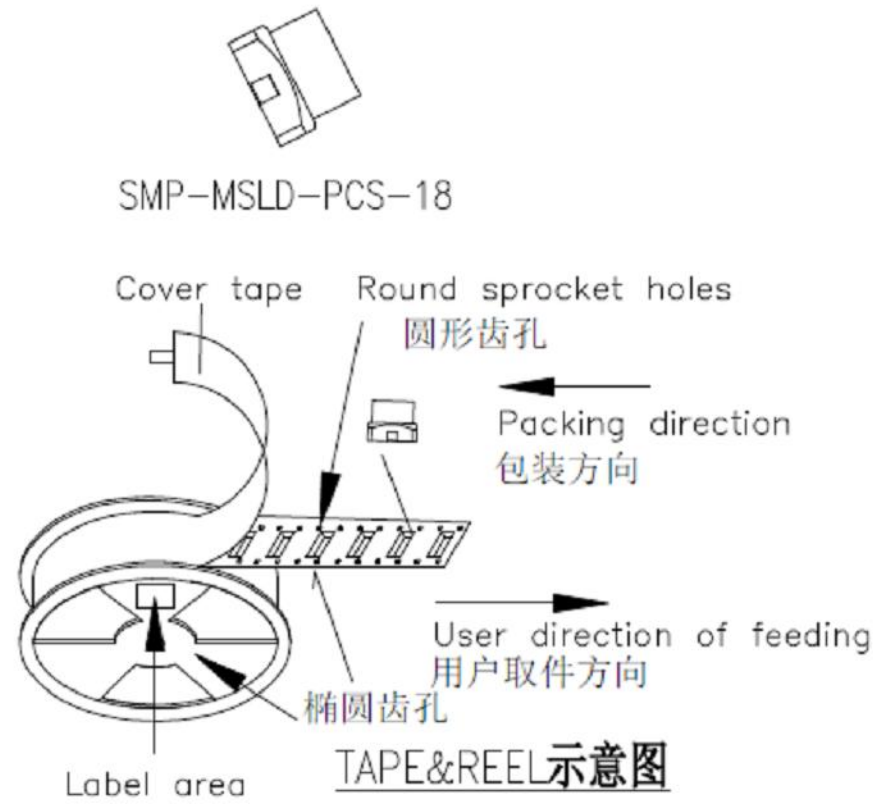

载带卷料方向

Notes:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
(每10个链轮齿孔孔径累计公差为 $\pm 0.20\text{mm}$)
2. Carrier camber not to exceed 1mm in 250mm.
(传送料带弯曲变形度每250mm(不超过1mm))
3. A₀ and B₀ measured on a plane 0.3mm above the bottom of the pocket. (A₀与B₀在同一平面测量且距口袋底部0.3mm)
4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
(K₀为口袋底部与材料表面的平面距离。)
5. All dimensions meet EIA-481-D requirements.
(所有尺寸符合EIA-481-D标准要求。)
6. Material: Black Antistatic polystyrene .
(材料:黑色聚苯乙烯。)
7. Thickness: 0.40 $\pm$ 0.05 mm.
(厚度:0.40 $\pm$ 0.05毫米。)
8. Packing length per 13" reel : 12.864Meters.
(每个13"卷轴包装长度12.864米。)
9. Component loader per 13" reel : 1000pcs.
(每个13"卷轴可装1000个零件。)

技术要求:

在没有保护膜的情况下, 0-90度往返折弯3次, 卷带不会破裂; 冷封带0.3~1.3N; 厚度及防静电要求需满足要求, 防静电性能使用寿命至少大于半年。载带侧壁支撑力2kgf以上。

包装信息	
卷盘	330mmx16mm
卷盘信息	宝蓝连体盘
上封带	13.3MM
每盘格数	1000pcs+前后各空36pcs
生产模具信息	
间距	12mm
模具穴数	8穴
成型模数	134模
每盘长度	12.864M

ITEM	W	A ₀	B ₀	K ₀	K ₁	P ₁	F	E	D ₀	D ₁	P ₀	P ₂	T
DIM	16 $\pm$ 0.3	5.3 $\pm$ 0.1	5.3 $\pm$ 0.1	4.3 $\pm$ 0.1		12.0 $\pm$ 0.1	7.5 $\pm$ 0.1	1.75 $\pm$ 0.1	1.5 $\pm$ 0.05		4.0 $\pm$ 0.1	2.0 $\pm$ 0.1	0.4 $\pm$ 0.05

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES $\pm 0.05\text{mm}$ $\pm 0.1\text{mm}$ $\pm 0.2\text{mm}$ $\pm 0.3\text{mm}$ $\pm 1^\circ$ NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN S.VO	DATE 25-Jul-19	TITLE SMP JACK PCB SMT RECEPTACLE LIMITED DETENT SCALE: 18.0:1.0 SHEET 3 OF 3	Amphenol RF www.amphenolrf.com
	REFERENCE	ENGINEER S.VO	DATE 25-Jul-19		
	EAR# 8532	APPROVED	DATE --		
	REF: SMP1251DI-001-30GP30G-50	--	--		
	CONFIGURATION LEVEL: In Work	CAD FILE			
FINISH				DWG SIZE B	REV A
					DRAWING NO. SMP-MSLD-PCS18T
					ITEM NO. SMP-MSLD-PCS18T
					PART NO. SMP-MSLD-PCS18T

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru