


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		

PART NUMBER	REV	FIRST USED	CARRIER TYPE
680832-1	C	122500-1	CUT
680832-2	C	565435-5	CUT
680832-3	C	354500-1	CUT
680832-4	C	354500-1	NON-CUT

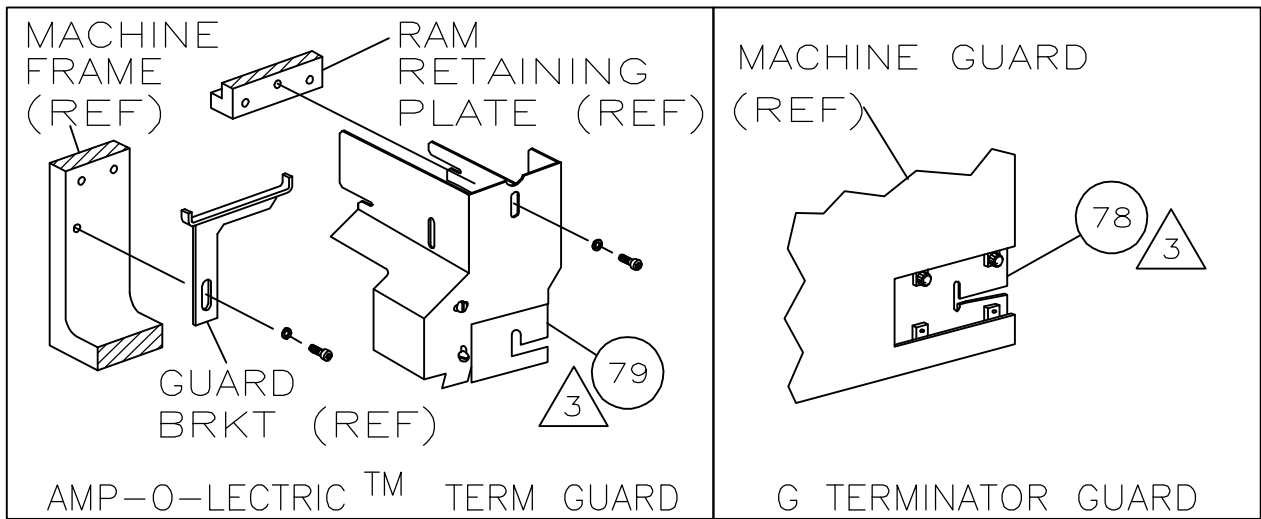

-1	LEADMAKER	POST FEED	-4	LEADMAKER	POST FEED
-2	BENCH MODEL K	PRE FEED	-	-	-
-3	BENCH MODEL G	PRE FEED	-	-	-

LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	ECR-07-008457	4-2007	MY	GB

REF	REF	REF	REF	—	22594-8	NUT, HEX(1/2-20)	70
REF	REF	REF	REF	—	240628-1	PLATE, ADJUSTMENT	69
REF	REF	REF	REF	—	240626-1	SHAFT, PIVOT	68
REF	REF	REF	REF	—	240633-1	BUSHING	67
REF	REF	REF	REF	—	455680-1	LEVER, INTERMEDIATE	66
REF	REF	REF	REF	—	240629-1	BLOCK, PIVOT	65
REF	REF	REF	REF	—	240632-2	SCREW, ADJ FEED ROD	64
REF	REF	REF	REF	—	240659-3	PIN, CAM ROLLER	63
REF	REF	REF	REF	—	240658-1	ROLLER, CAM	62
REF	REF	REF	REF	—	454398-2	ROD, FEED	61
REF	REF	REF	REF	—	454178-1	GUIDE, FEED ROD	60
REF	REF	REF	REF	—	454220-1	CAP, RAM	59
REF	REF	REF	REF	—	454485-1	HOUSING	58

1	1	1	1	—	458537-2	PAWL, FEED	57
REF	REF	REF	REF	—	240624-1	PIN, FEED FINGER	56
REF	REF	REF	REF	—	691499-1	SPRING, FEED FINGER	55
REF	REF	REF	REF	—	690541-1	HOLDER, FEED FINGER	54
REF	REF	REF	REF	—	455679-1	LEVER, TERMINAL FEED ARM	53
1	1	1	1	—	811242-2	BUMPER, HOLDDOWN	52
1	1	1	1	—	690753-1	SPACER, TONKER	51
—	1	—	—	—	690602-6	CAM, PRE-FEED 1 5/8 ST	50
—	—	1	—	—	690602-5	CAM, PRE-FEED 1 1/8 ST	49
1	—	—	1	—	690501-4	CAM, POST-FEED 1 5/8 ST	48
1	1	1	1	—	459456-1	APPLICATOR, BASIC (SUBASSY)	47
1	1	1	1	—	690191-1	PLUG, NYLON	46
1	1	1	1	—	455673-1	RAM	45
1	1	1	1	—	690125-1	WASHER, LAMINATED	44
1	1	1	1	—	690124-1	WASHER, RAM	43
1	1	1	1	—	7-21002-9	BOLT, CRIMPER(5/16x1.00)	42
1	1	1	1	—	23241-6	BALL, STEEL	41
1	1	1	1	—	690170-1	SPRING, COMPRESSION	40
1	1	1	1	—	1-690142-0	DISC, INSULATION	39
1	1	1	1	—	354777-1	WIRE DISC, PLASTIC	38
1	1	1	1	—	22480-5	WASHER, SPRING	37
1	1	1	1	—	690212-1	POST, RAM	36
1	1	1	1	—	690786-1	SUPPORT, TERMINAL	35
REF	REF	REF	REF	—	455675-1	PLATE, BASE	34
							33

							32
REF	REF	REF	REF	—	455689-1	BLOCK, STRIP GUIDE ADJ	31
1	1	1	1	—	318756-5	STRIP GUIDE PLATE ASSY	30
1	1	1	1	—	1-455888-9	SPACER, FRONT SHEAR DEP	29
2	2	2	2	—	1-22284-0	SPRING, DRAG	28
1	1	1	1	—	690546-1	LEVER, DRAG RELEASE	27
1	1	1	1	—	217233-1	DRAG, TERMINAL	26
1	1	1	1	—	7-690504-6	GUIDE, STRIP (REAR)	25
1	1	1	1	—	1-690438-1	GUIDE, STRIP (FRONT)	24
1	—	—	1	—	690472-2	STRIPPER	23
REF	REF	REF	REF	—	4-22284-9	SPRING, FEED RETURN	22
							21
—	1	1	—	—	691353-1	STRIPPER	20

							18
1	1	1	1	—	318563-1	GUARD, CHIP, FRONT	17
1	—	—	—	—	679625-2	SHEAR HOLDER (NON-CUT)	16
							15
1	1	1	1	—	3-22280-3	SPRING, SHEAR	14
1	1	1	1	—	690461-2	STOP, SHEAR	13
—	1	1	1	—	1-690459-0	HOLDER, SHEAR (FRONT)	12
1	1	1	1	—	318707-3	SHEAR, FLOAT (FRONT)	11
1	1	1	1	—	3-662186-4	ANVIL	10
							9
							8



							7
							6
1	1	1	1	—	318701-1	DEPRESSOR, SHEAR (FRONT)	5
1	1	1	1	—	1-238011-0	SPACER, BLOCK CRIMPER	4
1	1	1	1	—	5-683454-0	CRIMPER, INSULATION	3
1	1	1	1	—	1-455888-2	SPACER, CRIMPER	2
1	1	1	1	—	2-456405-9	CRIMPER, WIRE	1

-4	-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO
					PARTS LIST		
QTY REQD PER ASSY							




DRAWING IS A CONTROLLED DOCUMENT.		DWG. B-HIGMAN	19MAY99	tyco		Tyco Electronics Corporation	
		CHK. B-HIGMAN	19MAY99	Electronics		Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SIDE FEED HDM APPLICATOR		
		0 PLC ± -	1 PLC ± -	PRODUCT SPEC	-		
		2 PLC ± .02	3 PLC ± .02	APPLICATION SPEC	-		
		4 PLC ± -	5 PLC ± -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		WEIGHT		A1	00779	C=680832	-
CUSTOMER DRAWING				SCALE	SHEET	1 OF 2	REV C

TERMINAL NAME: 1.5 SYSTEM SEALED CONNECTOR						6	
SEAL		TERMINAL		CRIMP DATA (NON-AMP TERMINAL-MFR SPEC)			
286814		286813		PAD LTR	CRIMP HEIGHT		WIRE SIZE
				A	.051 ±.002 [1.30 ±.05mm]		1.25 mm
				B	.049 ±.002 [1.24 ±.05mm]		1 mm
				C	.045 ±.002 [1.14 ±.05mm]		0.85 mm
				D	.043 ±.002 [1.09 ±.05mm]		0.6 mm
				CRIMP	SIZE	TYPE	RANGE
				WIRE	.080 [2.03mm]	F	0.6-1.25mm
				INSUL	.140 [3.56mm]	0	1.6-2.34mm
WIRE STRIP LENGTH		TERM APPL SPEC		FEED		APPL INSTRUCTION	SET UP GAGE LAYOUT
.203—.234		NONE		.450		408-8040	458637-1 L2245

1. RECOMMENDED SPARE PARTS.
2. GREASE LIGHTLY.
3. GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE.
4. LUBRICATE DAILY USING NO. 20 MACHINE OIL.
5. ITEMS WITH QTY OF REF SPECIFIED (EXCEPT ITEMS 78 AND 79) ARE USED ON ITEM 46.
6. THIS APPLICATOR APPLIES TERMINAL WITH A SEAL
7. APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY #1-23419-5 LOC-TITE TO THREADS.
8. CUT TO LENGTH AT ASSY

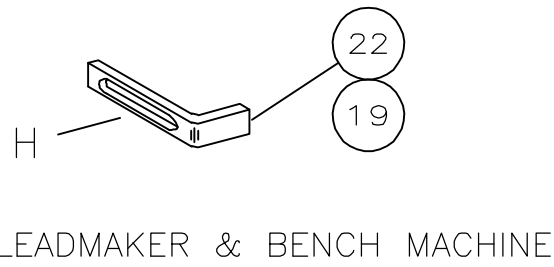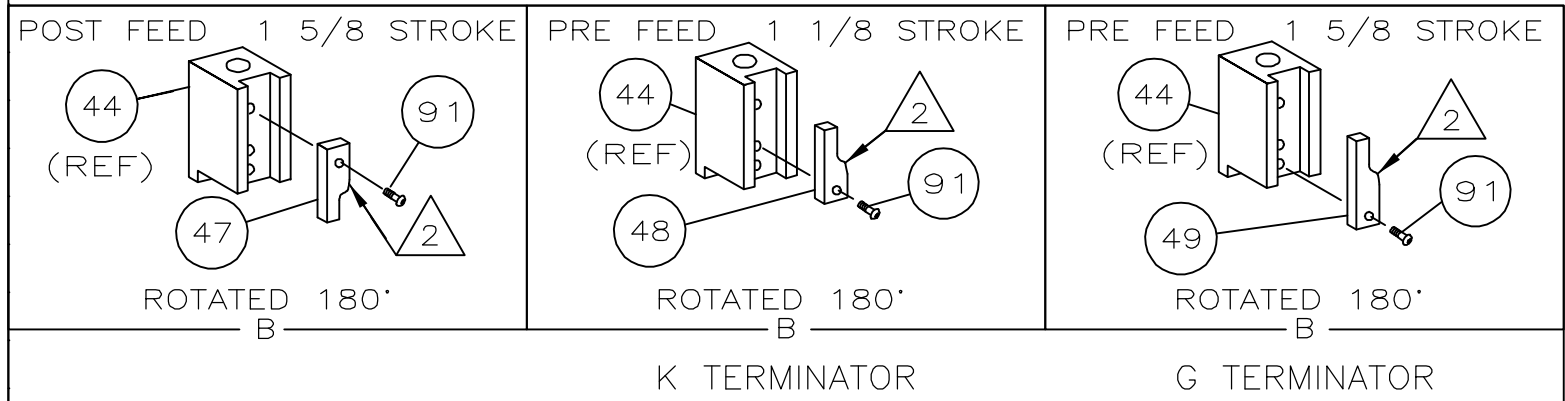

LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		—		SEE SHEET 1	—	—	—

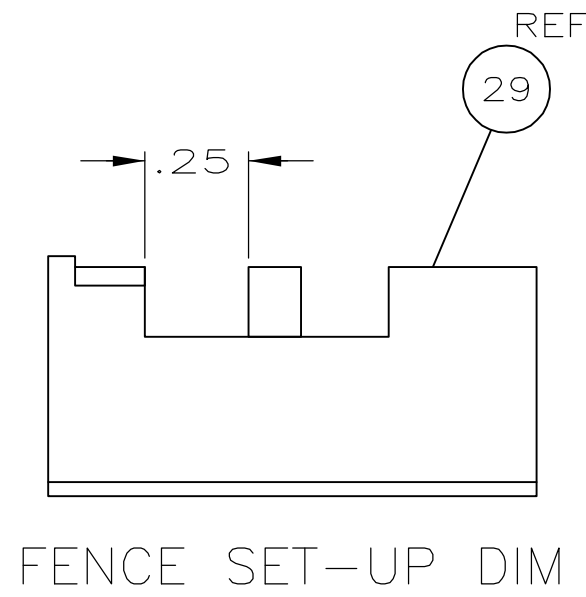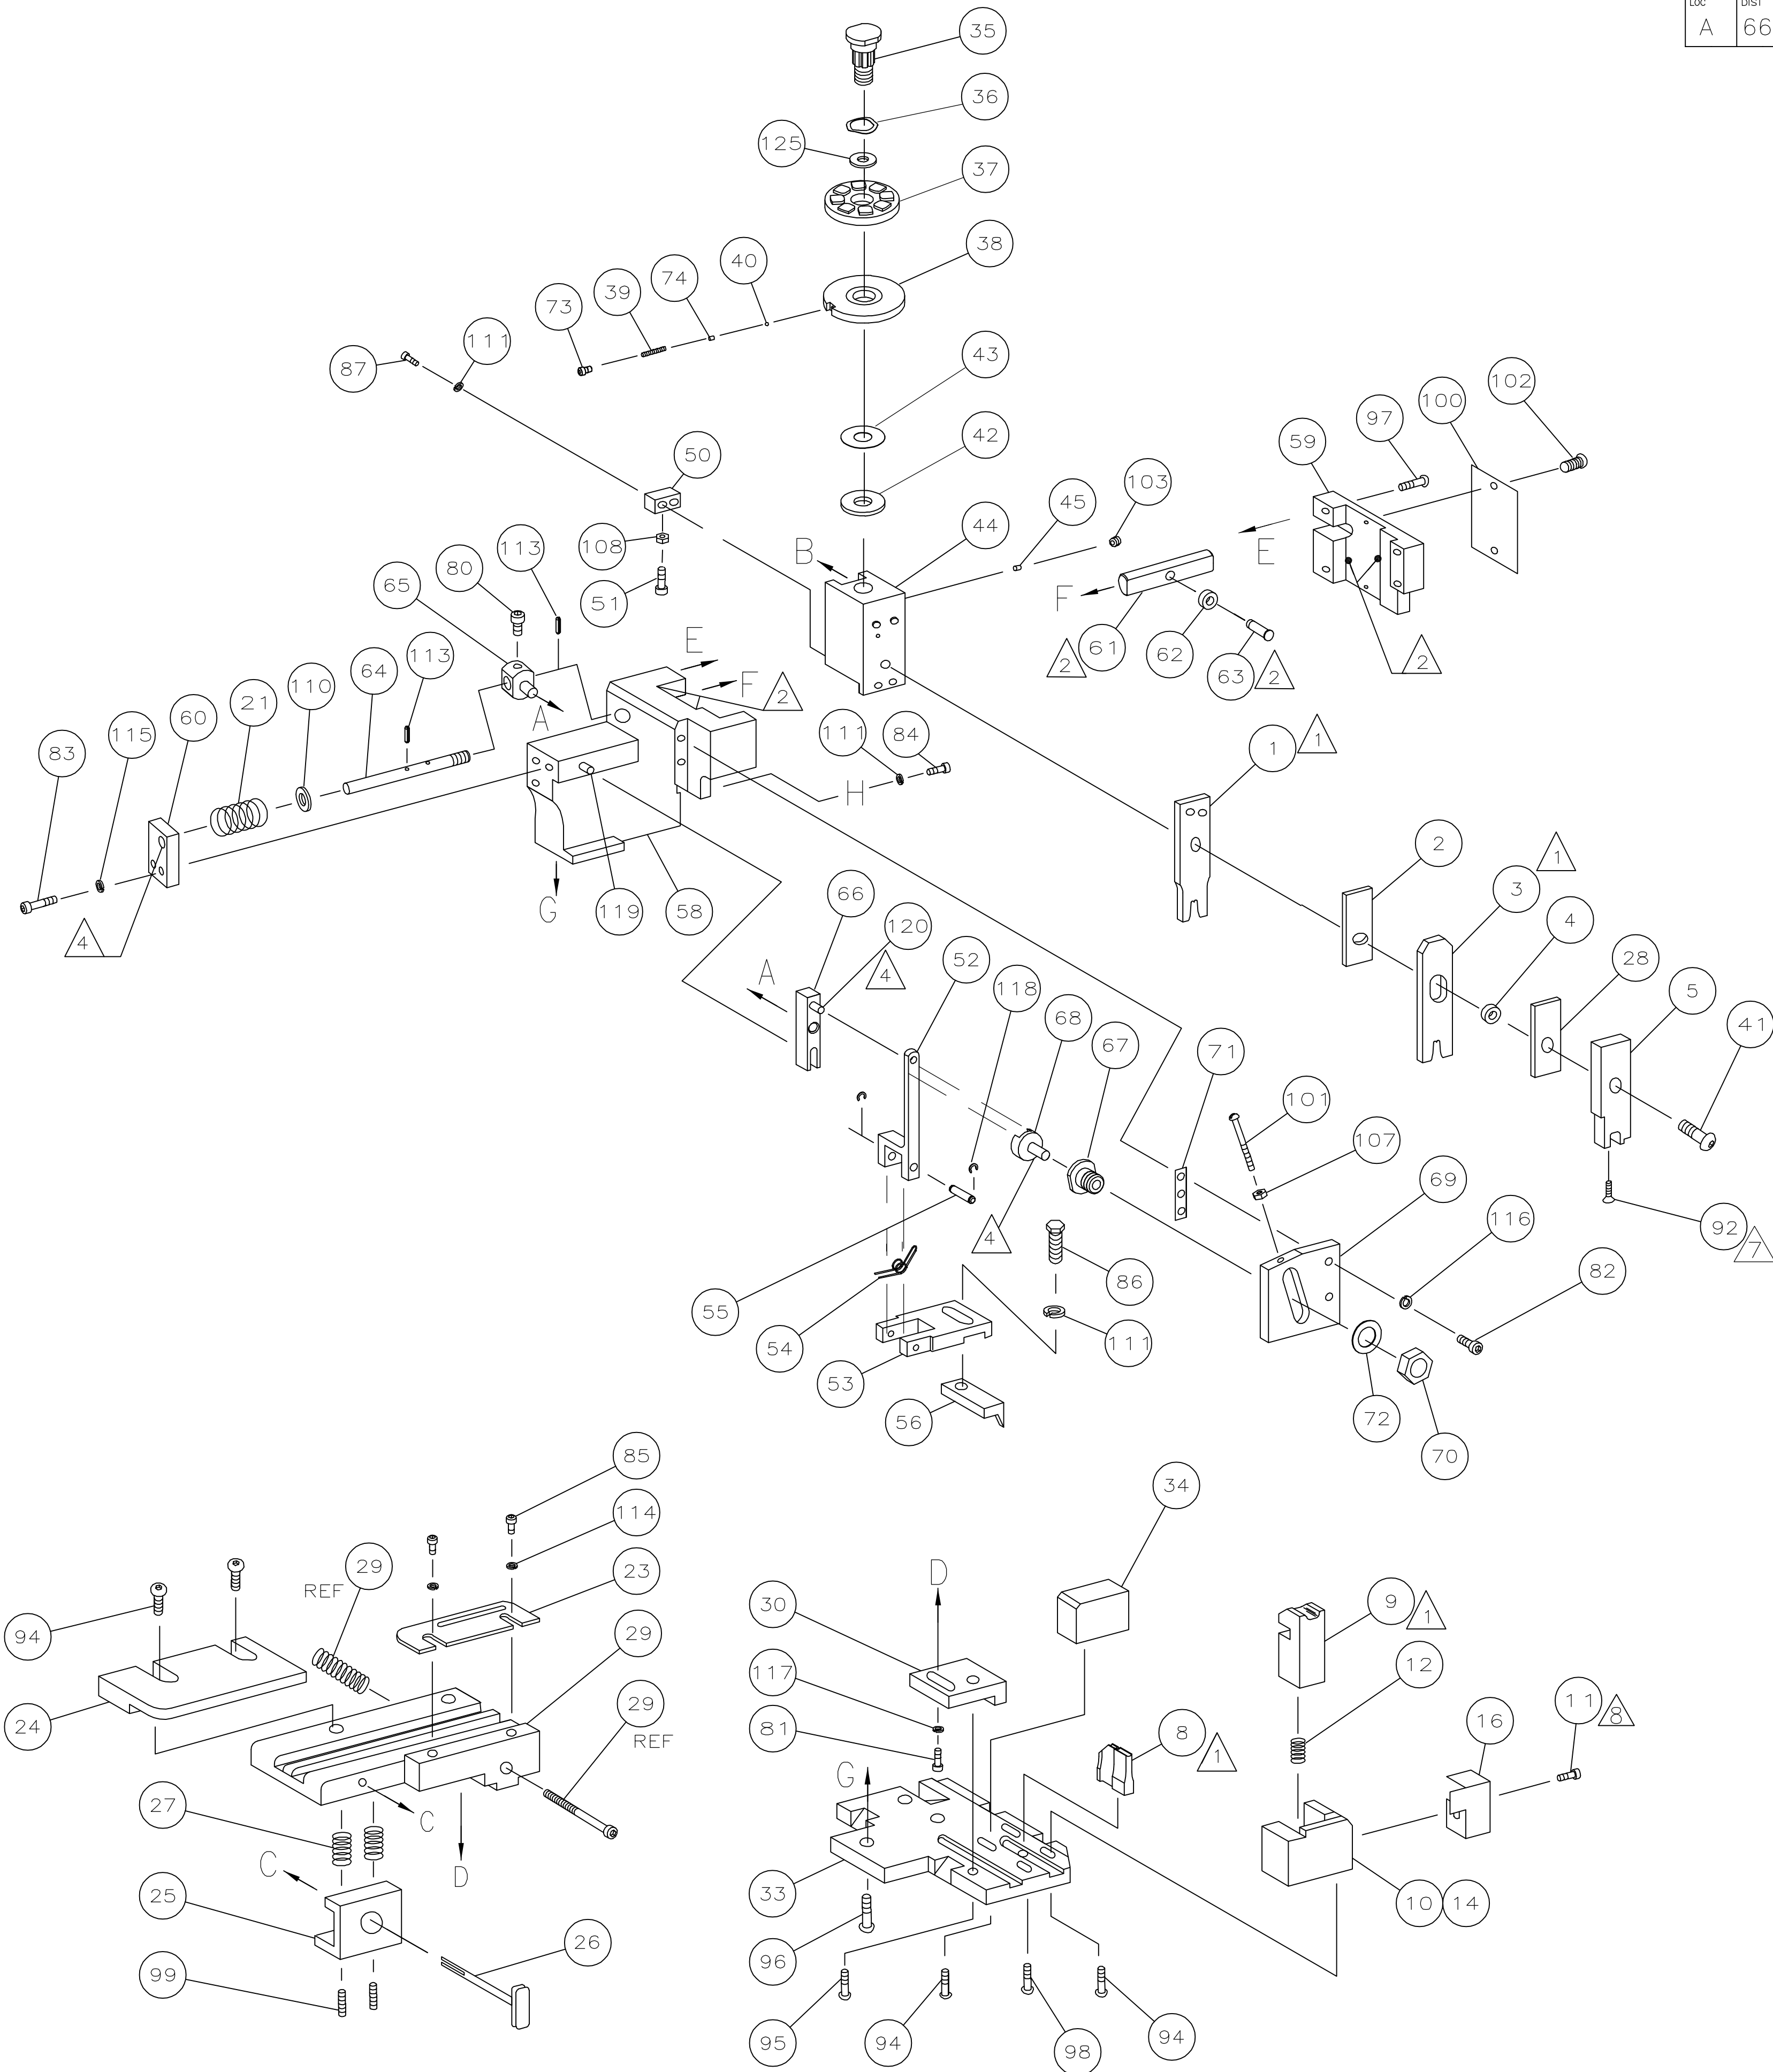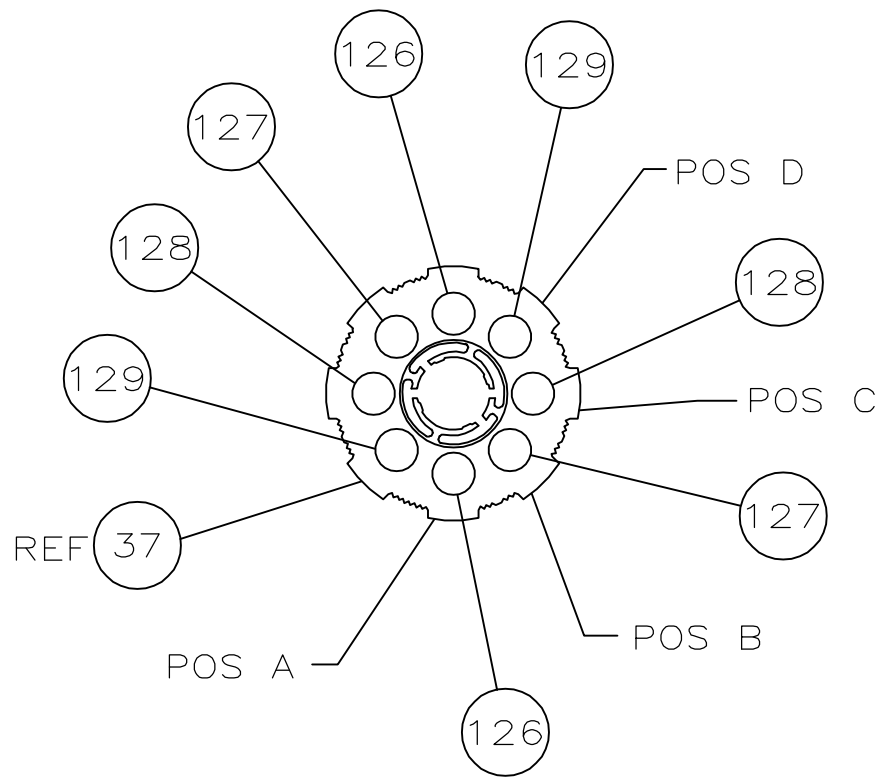

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HIGMAN 19MAY99	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK B. HIGMAN 19MAY99	NAME SIDE FEED HDM APPLICATOR			
		APVD T. ELBIN 19MAY99	PRODUCT SPEC			
			APPLICATION SPEC			
			RESTRICTED TO			
			CUSTOMER DRAWING			
MATERIAL —		FINISH —	WEIGHT F	SIZE A1	CAGE CODE 00779	DRAWING NO 680832
				SCALE —	SHEET 2	OF 2
					REV C	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru