


MALLORY

MALLORY SONALERT PRODUCTS, INC.

Product APPLICATION Guide

22mm Panel Alarms with Terminal Block Continuous & Pulsing Tones

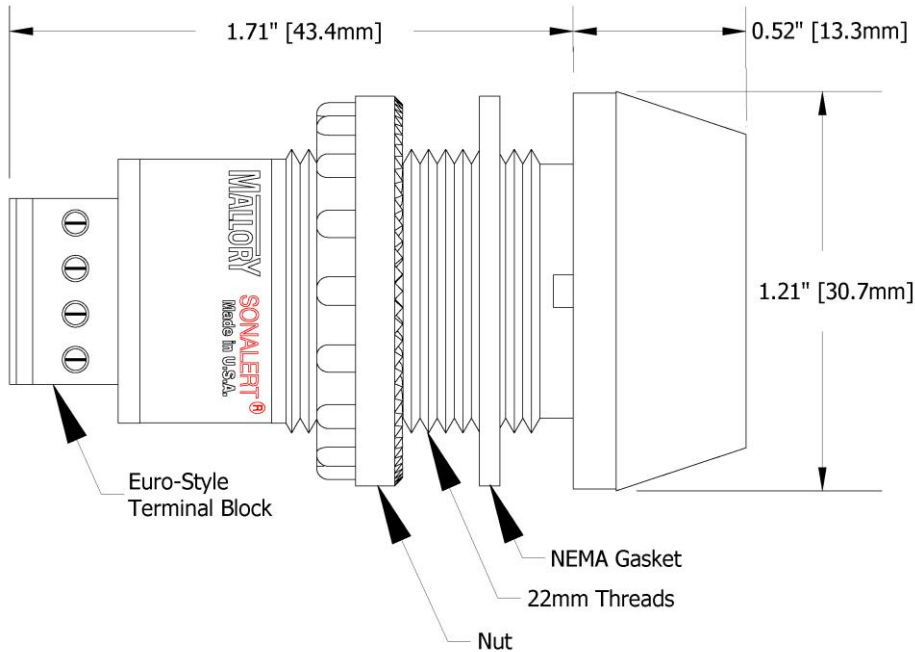

KEY FEATURES:

- Fits Standard 22mm Panel Hole
- Continuous & Pulsing Tones
- Voltages from 6 Vdc to 120 Vac
- Sound Levels up to 95 dB @ 2 ft.
- cUL Approved; RoHS Compliant
- NEMA 3R/4X/12; IP-66
- CSA C22.2 No. 94
- Terminal Block Termination:
 - Finger Proof Safe Handling
 - Prevents Shock & Shorting
 - Saves Assembly Time & Labor

Continued →

Part Number Structure

ZA 016 L D CT

Series: **ZA** = 22mm

Maximum Voltage:

016 = 6 - 16; **028** = 16 - 28; **048** = 28 - 48; **120** = 48 - 120

Sound Level:

L = Loud (85 - 95 dB @ 2 ft); **M** = Medium (75 - 85 dB @ 2 ft)

S = Soft (65 - 75 dB @ 2 ft)

Voltage Type: **D** = DC Only; **A** = AC or DC

Function:

CT = Continuous Tone; **FP1** = Fast Pulse; **MP1** = Medium Pulse

SP1 = Slow Pulse; **DP2** = Fast Double Pulse; **DP3** = Slow Double Pulse

Selection Guide

			SOUND LEVEL (dB @ 2 feet)			Tone Type
			Soft 65 to 75 dB	Medium 75 to 85 dB	Loud 85 to 95 dB	
VOLTAGE RANGE	DC Only	6 to 16 Vdc	Coming Soon	Coming Soon	ZA016LDCT	Continuous
			ZA016SDFP1	ZA016MDFP1	ZA016LDFP1	Fast Pulse
			ZA016SDMP1	ZA016MDMP1	ZA016LDMP1	Medium Pulse
			ZA016SDSP1	ZA016MDSP1	ZA016LDSP1	Slow Pulse
			ZA016SDDP2	ZA016MDDP2	ZA016LDDP2	Fast Double Pulse
			ZA016SDDP3	ZA016MDDP3	ZA016LDDP3	Slow Double Pulse
		16 to 28 Vdc	Coming Soon	Coming Soon	ZA028LDCT	Continuous
			ZA028SDFP1	ZA028MDFP1	ZA028LDFP1	Fast Pulse
			ZA028SDMP1	ZA028MDMP1	ZA028LDMP1	Medium Pulse
			ZA028SDSP1	ZA028MDSP1	ZA028LDSP1	Slow Pulse
			ZA028SDDP2	ZA028MDDP2	ZA028LDDP2	Fast Double Pulse
			ZA028SDDP3	ZA028MDDP3	ZA028LDDP3	Slow Double Pulse
	AC OR DC	16 to 28 Vac/dc	Coming Soon	Coming Soon	ZA028LACT	Continuous
			ZA028SAFP1	ZA028MAFP1	ZA028LAFP1	Fast Pulse
			ZA028SAMP1	ZA028MAMP1	ZA028LAMP1	Medium Pulse
			ZA028SASP1	ZA028MASP1	ZA028LASP1	Slow Pulse
			ZA028SADP2	ZA028MADP2	ZA028LADP2	Fast Double Pulse
			ZA028SADP3	ZA028MADP3	ZA028LADP3	Slow Double Pulse
		28 to 48 Vac/dc	Coming Soon	Coming Soon	ZA048LACT	Continuous
			ZA048SAFP1	ZA048MAFP1	ZA048LAFP1	Fast Pulse
			ZA048SAMP1	ZA048MAMP1	ZA048LAMP1	Medium Pulse
			ZA048SASP1	ZA048MASP1	ZA048LASP1	Slow Pulse
			ZA048SADP2	ZA048MADP2	ZA048LADP2	Fast Double Pulse
			ZA048SADP3	ZA048MADP3	ZA048LADP3	Slow Double Pulse
		48 to 120 Vac/dc	Coming Soon	Coming Soon	ZA120LACT	Continuous
			ZA120SAFP1	ZA120MAFP1	ZA120LAFP1	Fast Pulse
			ZA120SAMP1	ZA120MAMP1	ZA120LAMP1	Medium Pulse
			ZA120SASP1	ZA120MASP1	ZA120LASP1	Slow Pulse
			ZA120SADP2	ZA120MADP2	ZA120LADP2	Fast Double Pulse
			ZA120SADP3	ZA120MADP3	ZA120LADP3	Slow Double Pulse

Call 317-612-1000 or Visit www.mallory-sonalert.com for More Details

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru