

FED MFG CODE 91929

CHART 1

KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)
-------------------------	-----------------	-----------------------------

RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			AC VOLTS					
28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC


	ITLI56-1	ON	OFF	ON
	ITLI56-2	OFF	NONE	ON
	©	ON	NONE	ON
	ITLI56-2I	NONE	OFF	ON
	ITLI56-3I	NONE	ON	ON
	ITLI56-4	MOM OFF	NONE	ON
	ITLI56-5	MOM ON	OFF	ON
	ITLI56-6	MOM ON	NONE	OFF
	ITLI56-7	MOM ON	OFF	MOM ON
	ITLI56-8	MOM ON	NONE	ON
	ITLI56-5I	NONE	ON	MOM ON
	ITLI56-6I	MOM ON	OFF	NONE

20	.75	.5	15	6	5	3	15	10
----	-----	----	----	---	---	---	----	----

(REFER TO L191 FOR UL RATING)

15	.75	.5	15	6	4	2	10	7
----	-----	----	----	---	---	---	----	---

(REFER TO LI92 FOR UL RATING)




15A-125, <u>250</u> OR 277VAC 1/2HP-125VAC; 1HP-<u>250</u>, 277VAC 5A-125VAC "L" CODE L19	10A-125, <u>250</u> OR 277VAC 1/4HP-125VAC; 1/2HP-<u>250</u>, 277VAC 3A-125VAC "L" CODE L192
--	---

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH-TOGGLE




CATALOG LISTING
1TL156 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

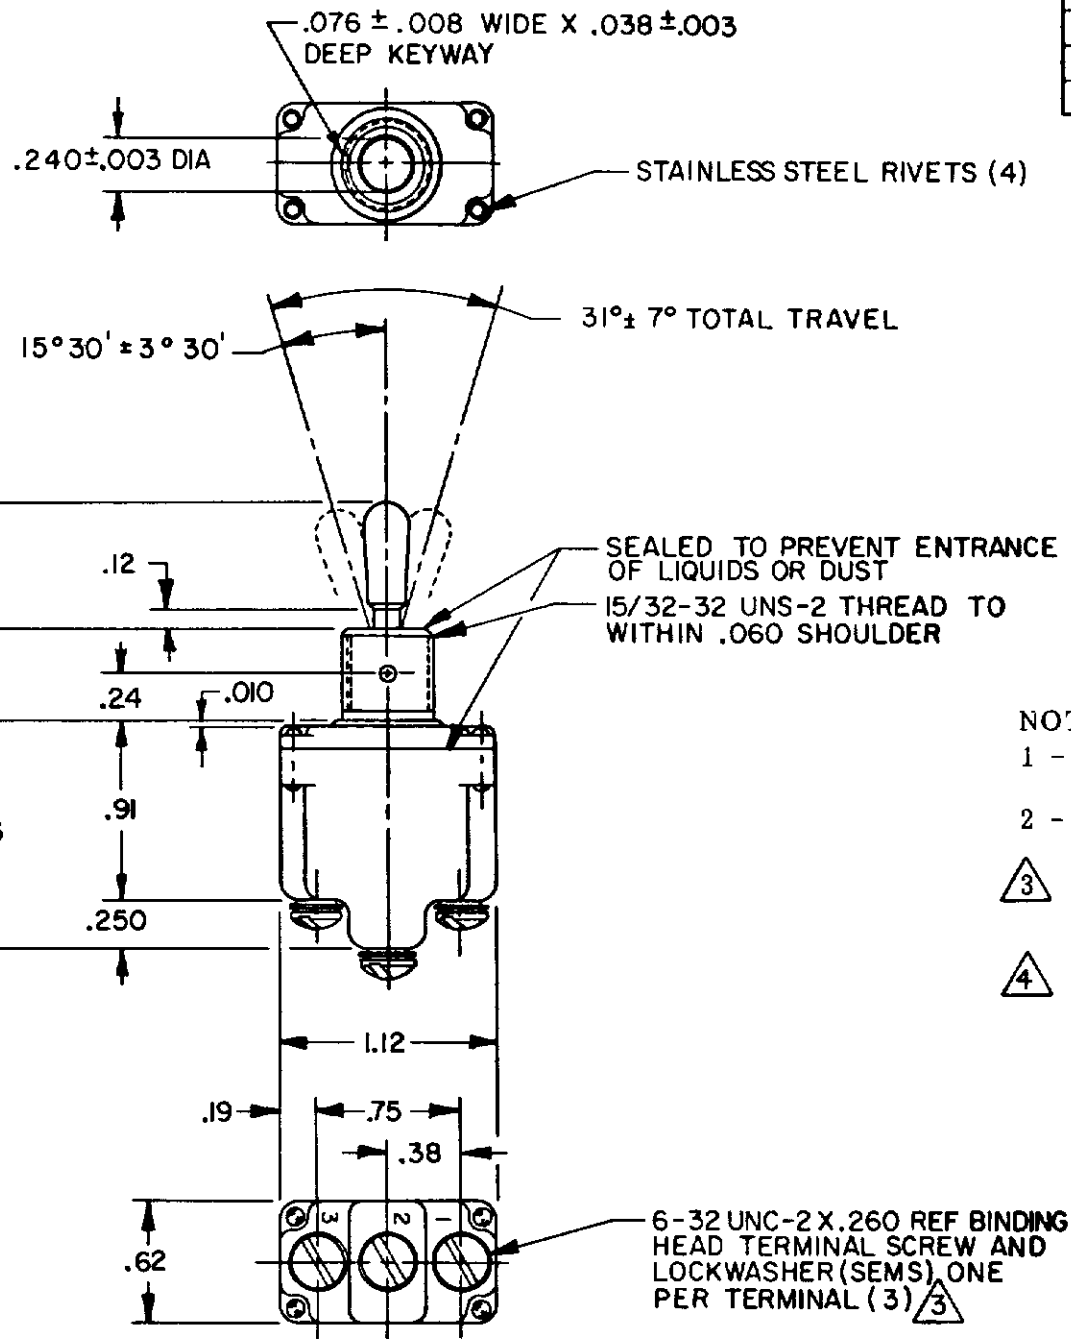

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN		
	KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)
ITL156-1	ON	OFF	ON
ITL156-2	OFF	NONE	ON
ITL156-3	ON	NONE	ON
ITL156-21	NONE	OFF	ON
ITL156-31	NONE	ON	ON
ITL156-4	MOM OFF	NONE	ON
ITL156-5	MOM ON	OFF	ON
ITL156-6	MOM ON	NONE	OFF
ITL156-7	MOM ON	OFF	MOM ON
ITL156-8	MOM ON	NONE	ON
ITL156-51	NONE	ON	MOM ON
ITL156-61	MOM ON	OFF	NONE

MILITARY RATING (AMPS)									
RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD		
DC VOLTS		AC VOLTS			28 VDC	125 VAC	28 VDC	125 VAC	
28	125	250	125	250					
20	.75	.5	15	6	5	3	15	10	
(REFER TO L191 FOR UL RATING)									
15	.75	.5	15	6	4	2	10	7	
(REFER TO L192 FOR UL RATING)									



- NOTES
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 FURNISHED UNASSEMBLED
 - 4 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (0) .030
TWO PLACE (.00) .018
THREE PLACE (.000) .008
ANGLES .008
WEIGHT .07 LBS APPROX

15A-125, 250 OR 277VAC
1/2HP-125VAC; 1HP-250, 277VAC
5A-125VAC "L" CODE L191
10A-125, 250 OR 277VAC
1/4HP-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" CODE L192

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru