

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		F1	REVISED PER ECO-11-005033	31MAR11	RK	HMR
			G	REVISED PER ECO-12-002190	03FEB12	TITAN	MARTIN

- NOTES
- 1

SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

GOLD PLATING
- 4

NICKEL PLATING
- 5

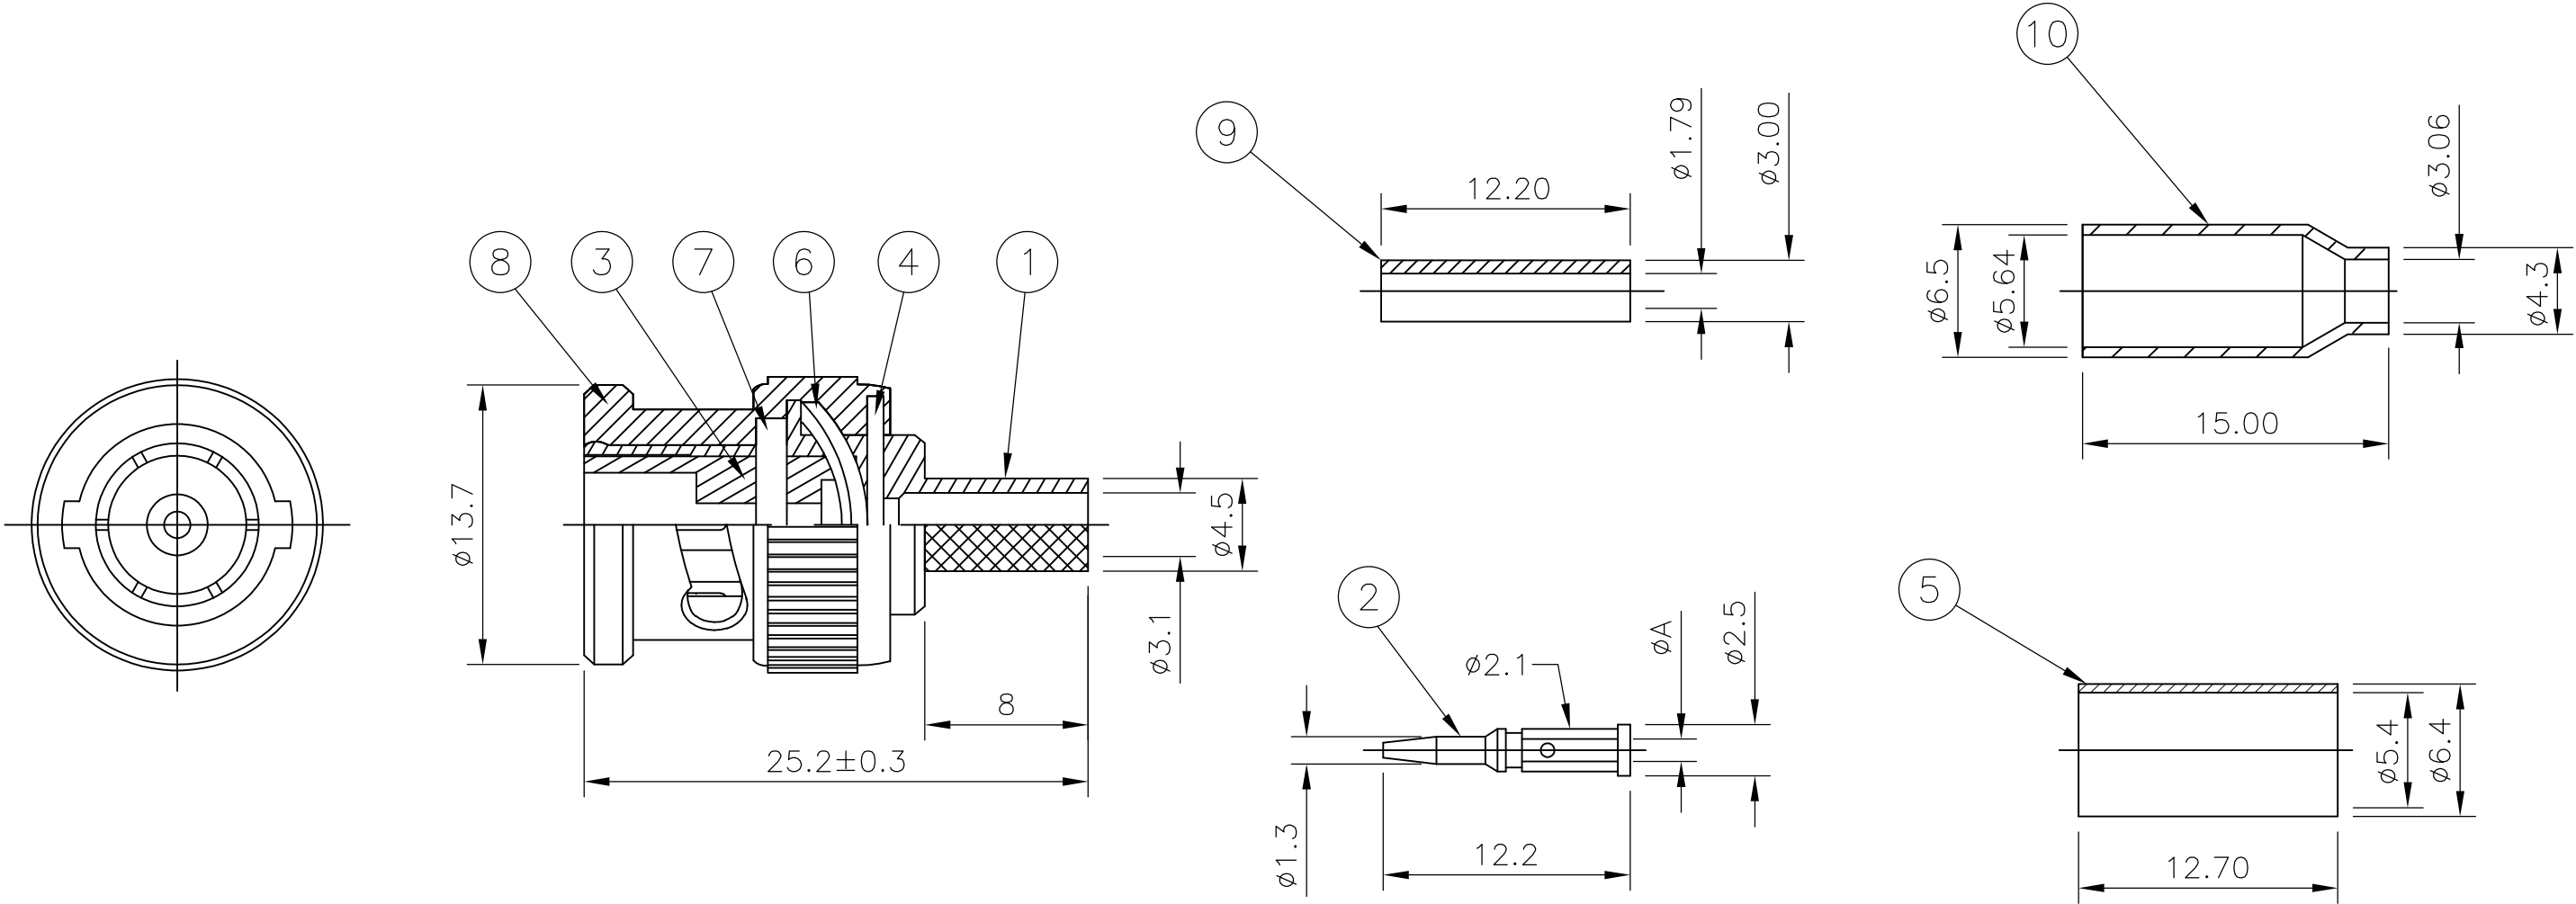
HAND TOOL: 9-1478240-0
- 6

DIE SET: SEE TABLE
- 7

FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
- 8

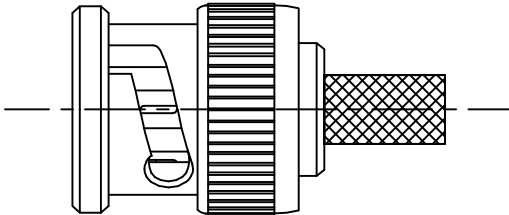

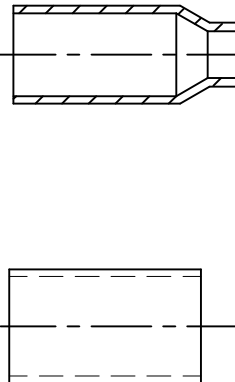
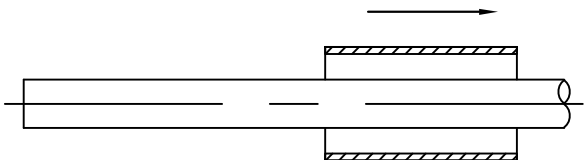
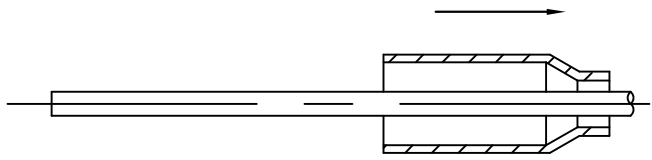
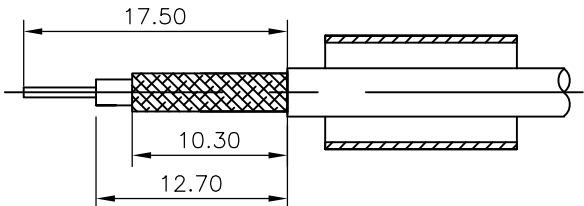
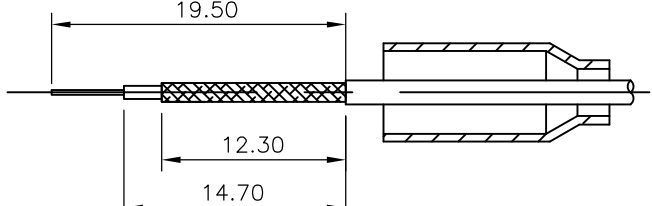
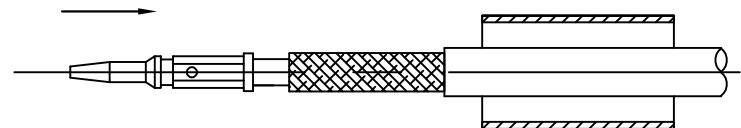

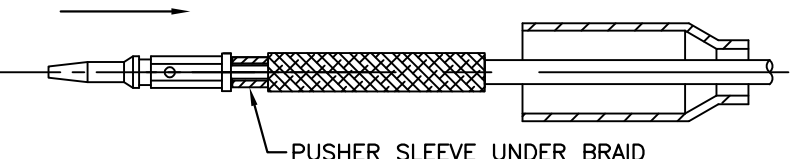

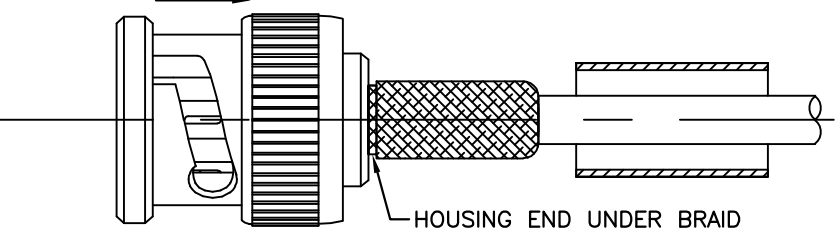
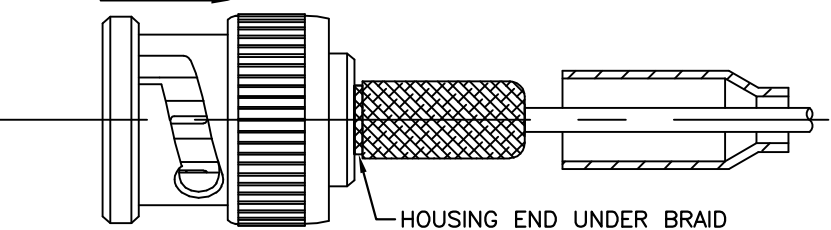
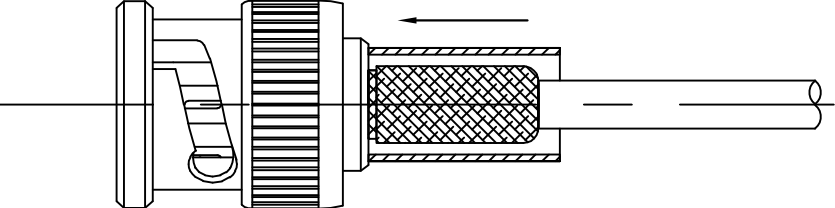

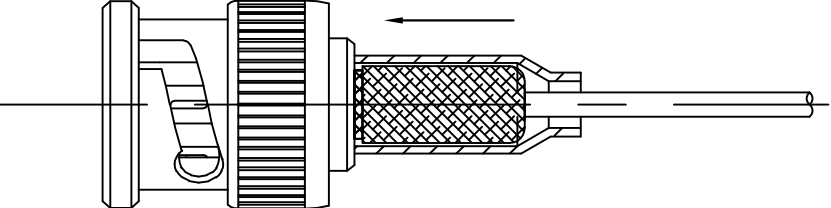


ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

						1.1	9-1478242-0	UTP CAROL CABLE #C6348A or EQUIVALENT		5-1634500-5
						1.1	9-1478242-0	UTP CAROL CABLE #C6348A or EQUIVALENT		5-1634500-4
						1.1	9-1478242-0	RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15		5-1634500-3
						1.1	9-1478242-0	RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15		5-1634500-2
						0.57	9-1478242-0	RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A		5-1634500-1
						0.57	9-1478242-0	RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A		5-1634500-0
						A	DIE SET	CABLE GROUPS		PART NO.
DIMENSIONS										



OBSOLETE	OBSOLETE	1	1	-	-	1	1	BRASS	△	CRIMP SLEEVE	10
		-	-	-	-	1	1	NYLON		PUSHER SLEEVE	9
		1	1	1	1	1	1	ZINC ALLOY	△	BARREL	8
		1	1	1	1	1	1	SILCON RUBBER		GASKET	7
		1	1	1	1	1	1	SPRING STEEL		SPRING	6
		1	-	1	1	-	-	BRASS	△	CRIMP SLEEVE	5
		1	-	1	1	1	1	BRASS	△	WASHER	4
		1	-	1	1	1	1	POLYMETHYLPENTENE		INSULATOR	3
		1	1	1	1	1	1	BRASS	△	CONTACT	2
		1	1	1	1	1	1	ZINC ALLOY	△	BODY	1
		5	5	4	5	3	5	0	MATERIAL		DESCRIPTION
△	△	△	△	△	△	△	QUANTITY PER ASSY				
PARTS LIST											

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	19 Feb 09	TE TE Connectivity					
				CHK	19 Feb 09						
				APVD	19 Feb 09	NAME					
				PRODUCT SPEC							
				APPLICATION SPEC		BNC STRAIGHT PLUG HEX CRIMP 50 OHM -					
				SEE SHEET 2							
				WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
				CUSTOMER DRAWING		A2	00779	C=1634500	-		
				SCALE	NTS	SHEET	1 of 2	REV	G		

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		DEC , 2004.			
© COPYRIGHT 2004 By -		ALL RIGHTS RESERVED.					
LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION		DATE	DWN
			-	SEE SHEET 1		-	-
COMPONENTS							
		MAIN BODY (ITEM 1,3,4,6,7 & 8)		CENTRE CONTACT (ITEM 2)		PUSHER SLEEVE (ITEM 9)	
							
							
ASSEMBLY INSTRUCTION							
CABLES: RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15				CABLES: RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A, UTP CAROL CABLE #C6348A			
STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE 				STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE 			
STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN 				STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN 			
STEP 3 1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 2. CRIMP USING TOOL AS NOTES ON PAGE 1. 		RECOMMENDED CENTRE CONTACT A/F HEX 		STEP 3 1. SLIDE ITEM 9 PUSHER SLEEVE OVER DIELECTRIC BEFORE FITTING THE CONTACT. NO PUSHER SLEEVE IS NEEDED FOR 5-1634500-4 & 5-1634500-5. 2. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 3. CRIMP USING TOOL AS NOTES ON PAGE 1. 		RECOMMENDED CENTRE CONTACT A/F HEX 	
STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID. 				STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE PUSHER SLEEVE AND CABLE BRAID. 			
STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN. 		RECOMMENDED CRIMP SLEEVE A/F HEX 		STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE BODY HOUSING. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN. 		RECOMMENDED CRIMP SLEEVE A/F HEX 	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN RITA ZUO 19 Feb 09 CHK ANSON MA 19 Feb 09 APVD BOB ZHAO 19 Feb 09 PRODUCT SPEC 108-112000 APPLICATION SPEC SHEET 2 WEIGHT - CUSTOMER DRAWING			
DIMENSIONS: MM 		TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME BNC STRAIGHT PLUG HEX CRIMP 50 OHM - SCALE NTS			
MATERIAL SEE TABLE		FINISH SEE TABLE		SIZE A2		CAGE CODE 00779	
				DRAWING NO C=1634500		RESTRICTED TO -	
				SHEET 2 OF 2		REV G	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru