


Specialty Fuses

Fast-Acting

GMW and HWA

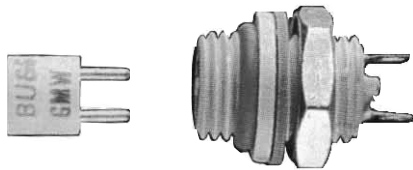

CATALOG SYMBOL: GMW (FUSE), HWA (HOLDER)

PIN TYPE

0.280" x 0.25" (7.1mm x 6.4mm)

FAST-ACTING

INTERRUPTING RATING - 35 AMPS

GMW: U.L. RECOGNIZED

(GUIDE #JDYX2, FILE # E19180)


HWA: U.L. RECOGNIZED

(GUIDE #IZLT2, FILE # E14853)

Dimensional Data



MOUNTING HOLE ± 0.002" (0.5mm)



Test Specifications

| Load | Opening Time |
|------|----------------|
| 100% | 4 hrs. (min.) |
| 200% | 10 sec. (max.) |

Electrical Ratings (Catalog Symbol and Amperes)

| 125 Volts | | |
|-----------|----------|-----------|
| GMW-1/100 | GMW-1/4 | GMW-1-1/2 |
| GMW-1/64 | GMW-3/10 | GMW-2 |
| GMW-1/32 | GMW-4/10 | GMW-3 |
| GMW-1/16 | GMW-1/2 | GMW-4 |
| GMW-1/10 | GMW-6/10 | GMW-5 |
| GMW-1/8 | GMW-3/4 | — |
| GMW-2/10 | GMW-1 | — |

Carton Quantity and Weight

| Ampere Ratings | Carton Qty | Weight* | |
|----------------|------------|---------|-------|
| | | Lbs. | Kg. |
| GMW 1/100-5 | 100 | 0.20 | 97.7 |
| HWA Fuseholder | 100 | 0.44 | 200.0 |
| AF Knob | 100 | 0.25 | 113.4 |

* Weight per carton.

- Sub-miniature pin-base fuses for limited space applications.
- Can be soldered direct into circuit or can be mounted in HWA holder which can be soldered into circuit.
- Transparent window in fuse for visual determination of open fuse element.
- Fuseholder body and knob material is diallyl phthalate.
- Holder includes "O"-ring, gasket, and nut.
- Military versions: fuse—FMO1; holder—FHN42W.
- Type HWA-AF holder includes waterproof cap (knob) AF.

Time-Current Characteristics—Total Clear



The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru