

A

B

C

D

E

F

A

B

C


D

E


F

Amphenol
FCi

© 2016 AFCi

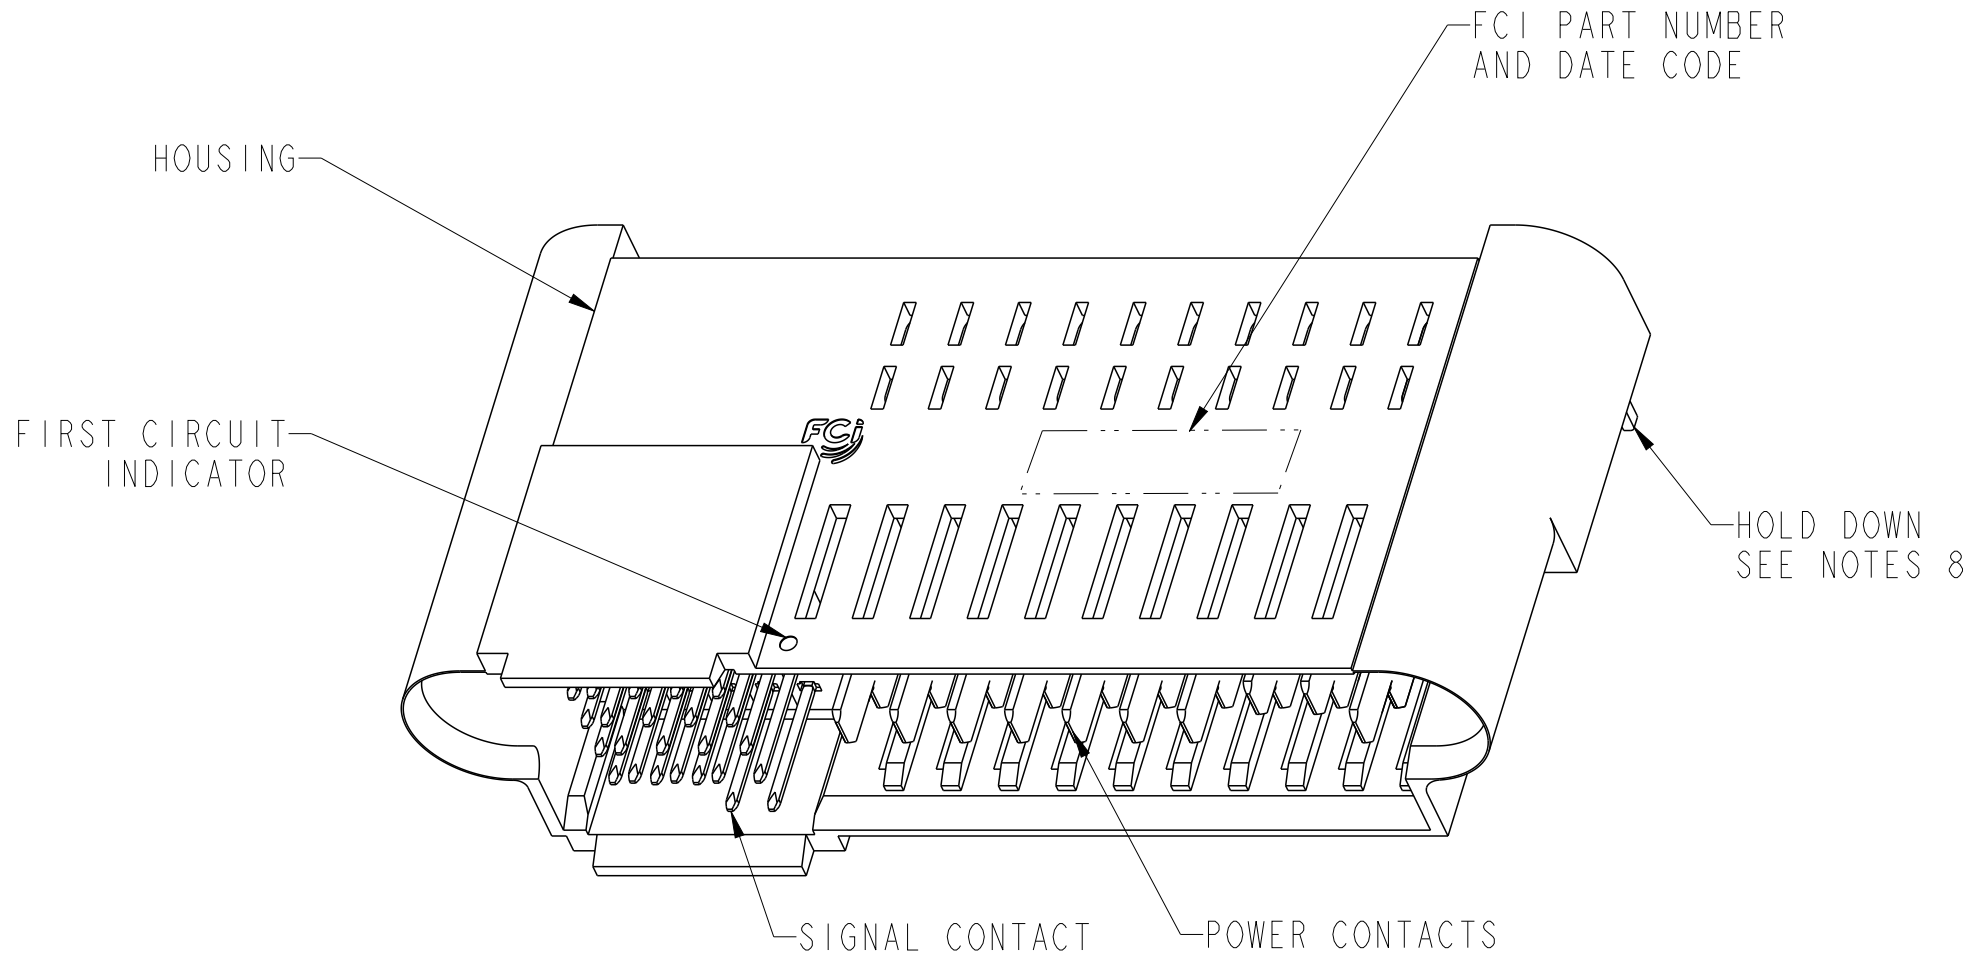

25Sx10P CONFIGURATION SHOWN
HOLD DOWN TYPE

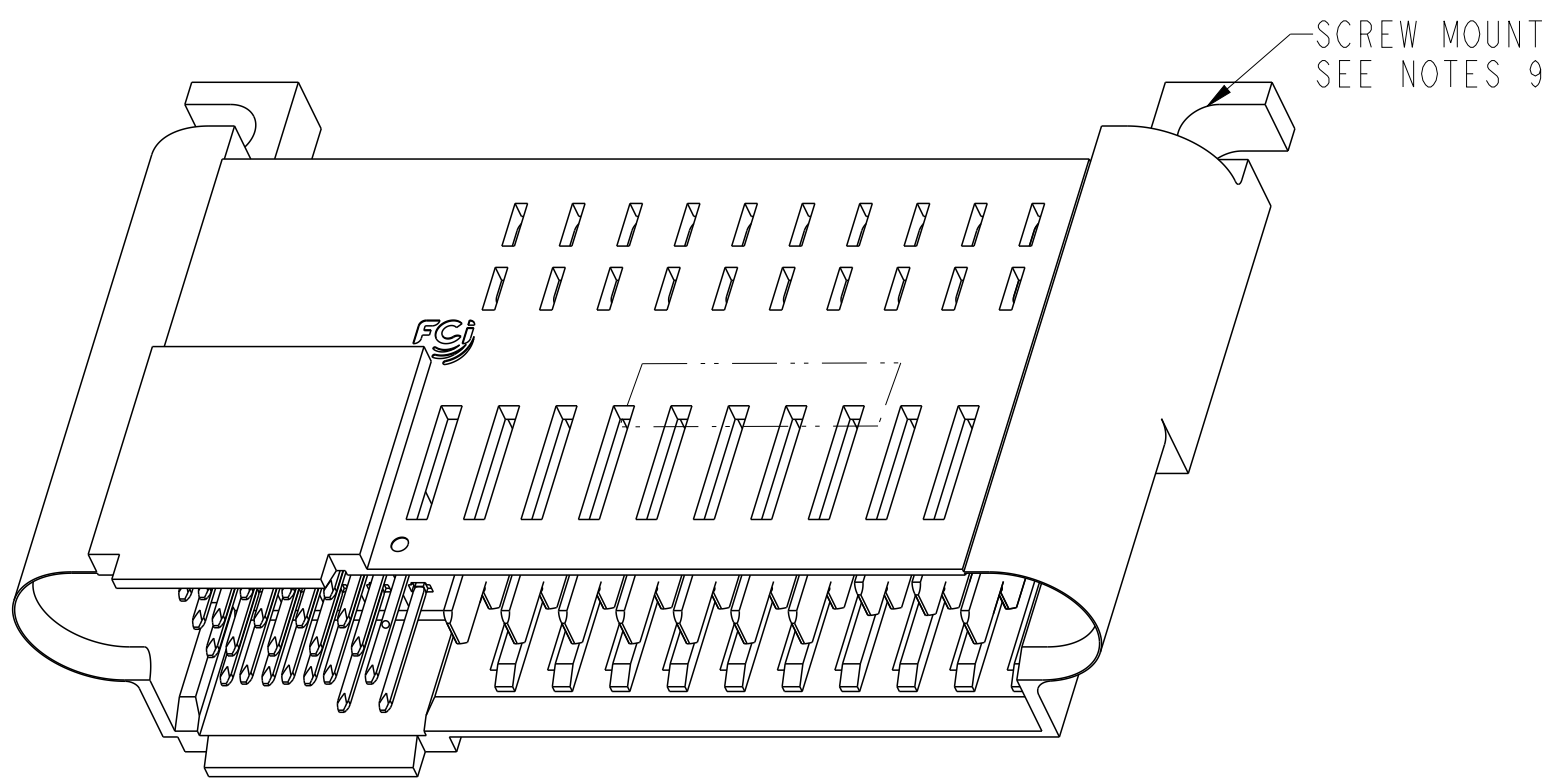

25Sx10P CONFIGURATION SHOWN
SCREW MOUNT TYPE




NOTES:

1. HOUSING MATERIAL:GF LCP,COLOR: BLACK, UL 94 V-0 RATED
SIGNAL CONTACT MATERIAL: PHOSPHOR BRONZE
SIGNAL PIN OVERMOLD MATERIAL: GF POLYESTER
POWER CONTACT MATERIAL: COPPER ALLOY
2. PLATING ON SIGNAL CONTACTS: 1.27µm MIN Ni UNDERPLATING ALL OVER
WITH 0.76µm MIN GXT IN CONTACT MATING AREA, AND
0.5µm MIN MATTE TIN ON TAIL AREA.

PLATING ON POWER CONTACTS: 1.27µm MIN Ni UNDERPLATING ALL OVER
WITH 0.76µm MIN GXT IN CONTACT MATING AREA, AND
0.5µm MIN MATTE TIN ON TAIL AREA.


PLATING ON HOLD DOWN IF APPLICABLE: 1.27um MIN Ni, UNDERPLATING ALL
OVER WITH 0.76um MIN MATTE TIN OVER.
3. LUBRICATION: LUBRICATE ON CONTACT AREA.
4. RECOMMENDED PCB THICKNESS IS:
FOR PRESS FIT APPLICATION: 1.4mm MIN
FOR SOLDER APPLICATION: 1.40mm THROUGH 2.62mm.
5. FOR SCREW MOUNT APPLICATIONS, A #4-40 UNC PAN SCREW WITH HEX
NUT IS RECOMMENDED (SUPPLIED BY CUSTOMER).
6. FOR PRESS FIT $\varnothing 0.61\pm 0.05\text{mm}$, FOR SOLDER $\varnothing 0.90\pm 0.05\text{mm}$.
7. UNPLATED HOLES.
8. HOLD DOWN APPLICATION NEEDED.
9. SCREW MOUNT APPLICATION NEEDED.
10. PRODUCT SPECIFICATION: GS-12-1064
APPLICATION SPECIFICATION: GS-20-0362

spec ref		SEE NOTE 10			dr		Zhang Hong-Tu		2012/08/13		projection		MM		size		A2		scale		1:1														
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		De-Ming Lu		2017/05/09						ecn no		ELX-DG-18076-1																		
ISO 406					chr		Fancy Zhang		2017/05/23						rel level		Released																		
ISO 1101					appr		Pei-Ming Zheng		2017/05/26						product family		PwrLoPro																		
surface		linear		0.X		±0.30		Amphenol FCi		title		PWR LoPro HEADER ASSEMBLY										dwg no		10122460						rev		H			
0.XX				±0.20																															
0.XXX				±0.10																															
ISO 1302		angular		0°		±2°						cat. no.		-		Product - Customer Drw										sheet 1 of 10									

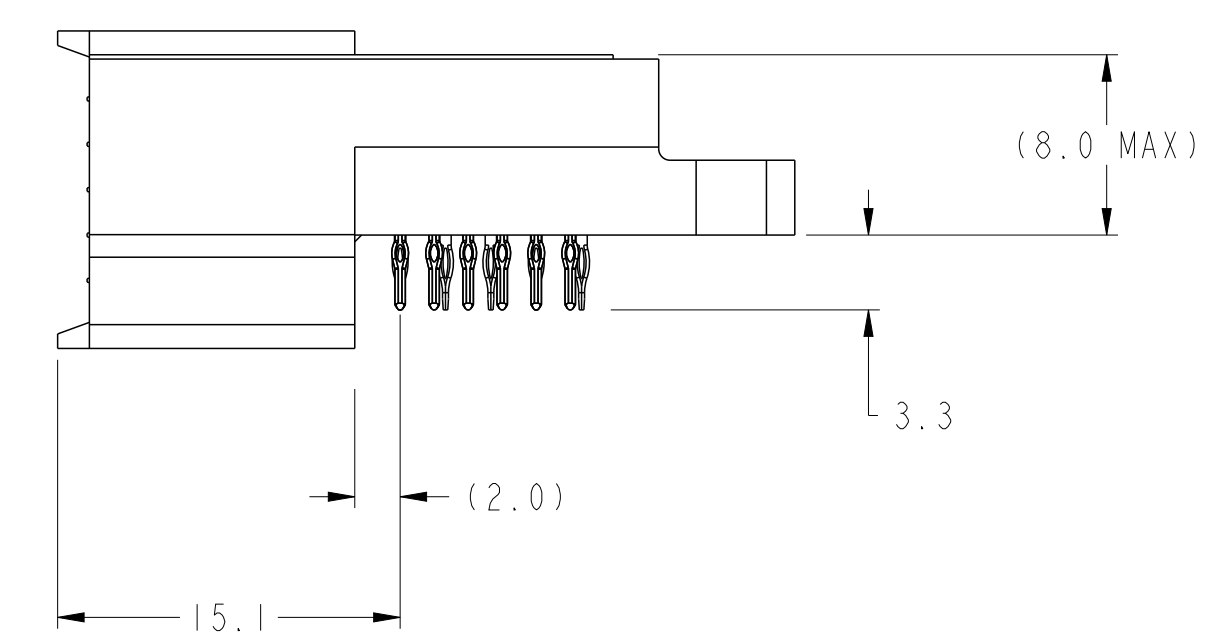
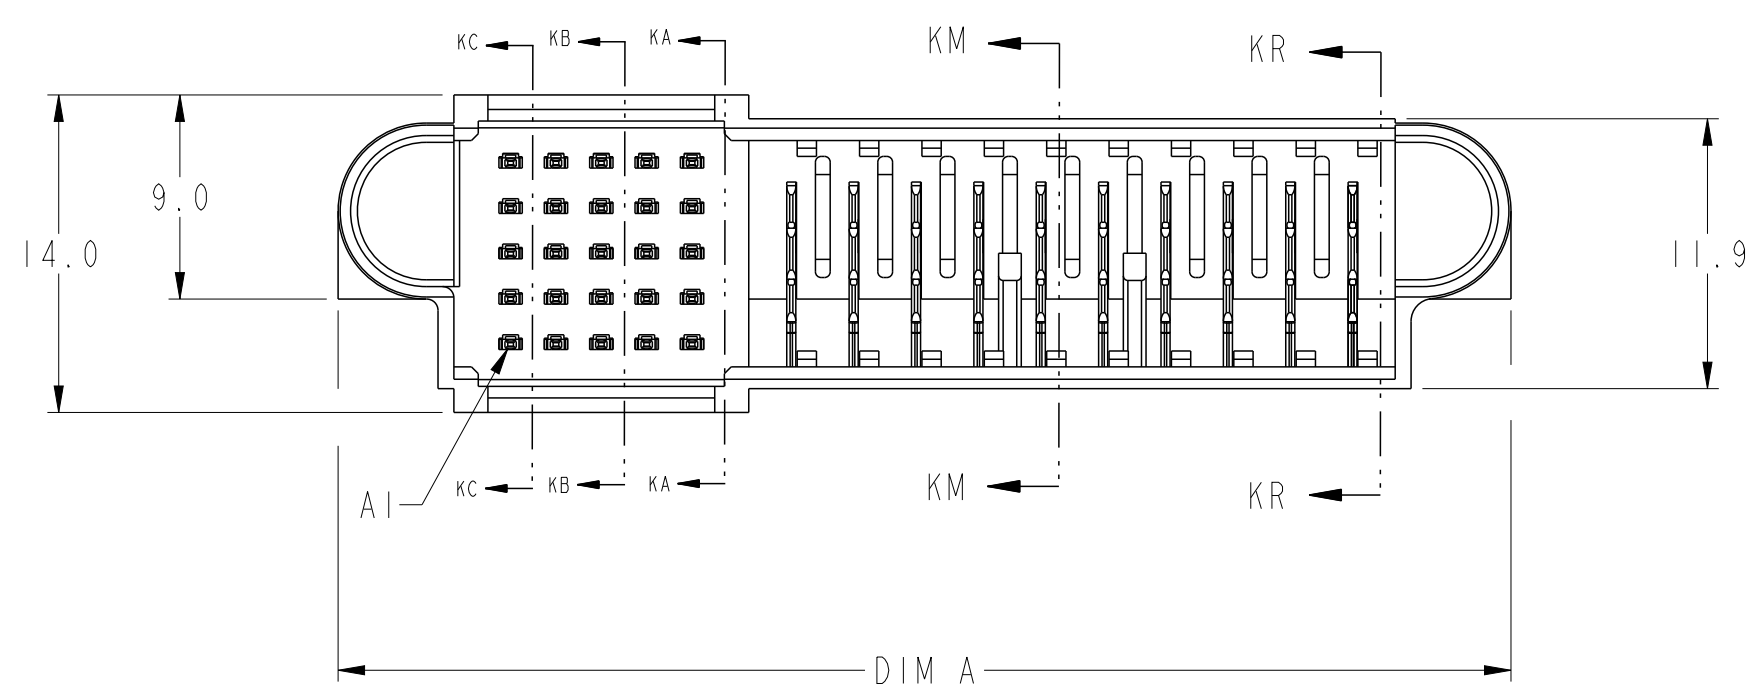
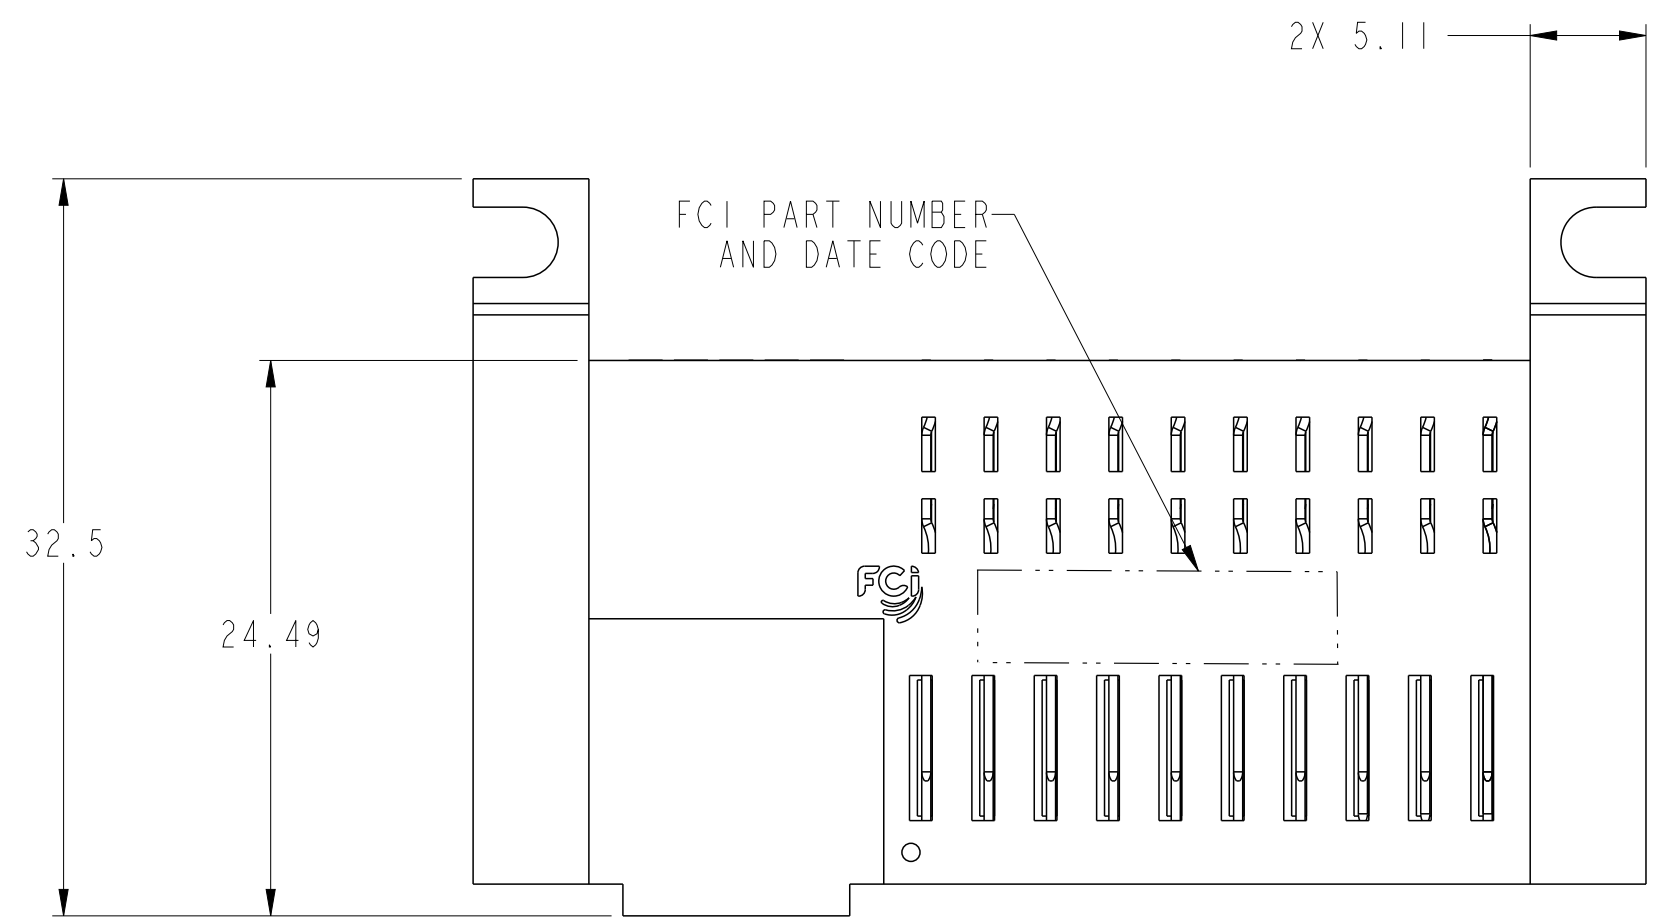


SCREW MOUNT TYPE AS SHOWN

spec ref		SEE NOTE 10		dr	Zhang Hong-Tu	2012/08/13	projection 	MM 	size	A2	scale	3:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	De-Ming Lu	2017/05/09			ecn no	ELX-DG-18076-1			
ISO 406 ISO 1101				chr	Fancy Zhang	2017/05/23			rel level Released				
				appr	Pei-Ming Zheng	2017/05/26	product family		PwrLoPro				
surface  ISO 1302	linear	0.X	±0.30	Amphenol FCI	title	PWR LoPro HEADER ASSEMBLY RA, PASSIVE GUIDE,S+P			dwg no	10122460		rev	H
		0.XX	±0.20										
	0.XXX	±0.10											
	angular	0°	±2°			cat. no.	-	Product - Customer Drw			sheet 2 of 10		

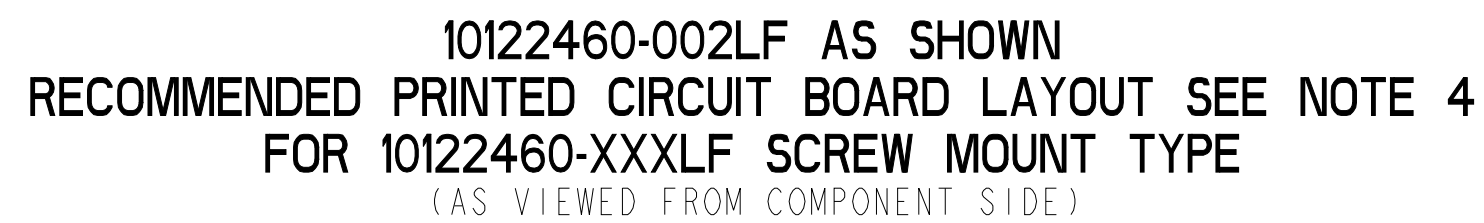


spec ref		SEE NOTE 10		dr		Zhang Hong-Tu		2012/08/13		projection				MM				size		A2		scale		3:1							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		De-Ming Lu		2017/05/09						ecn no		ELX-DG-18076-1		rel level		Released											
ISO 406				chr		Fancy Zhang		2017/05/23																							
ISO 1101				appr		Pei-Ming Zheng		2017/05/26						product family		PwLoPro															
surface		linear		0.X ±0.30 0.XX ±0.20 0.XXX ±0.10		Amphenol FCI		title		PWR LoPro HEADER ASSEMBLY		dwg no		10122460		rev		H													
																				cat. no.		-		Product-		Customer		Drw		sheet 3 of 10	
																				angular		0° ±2°									
ISO 1302																															

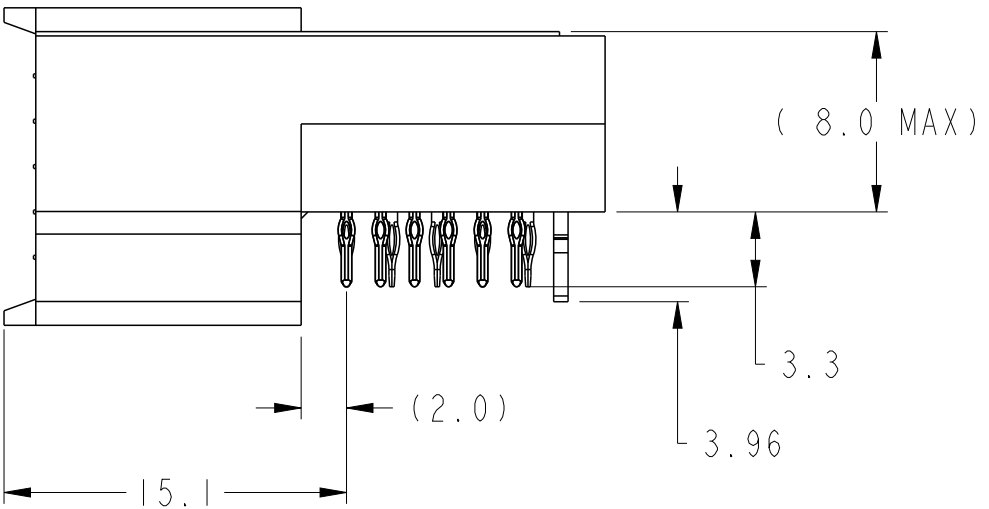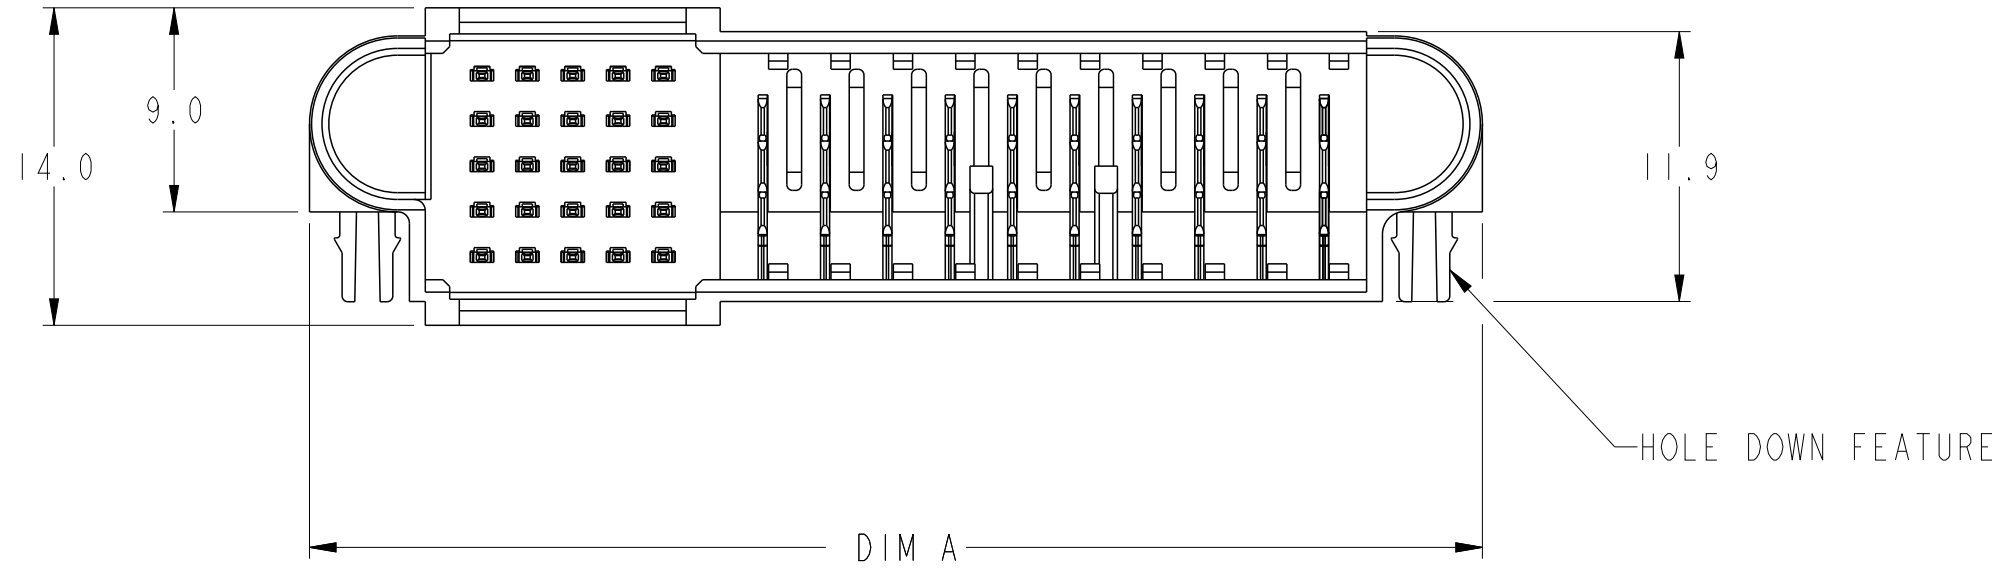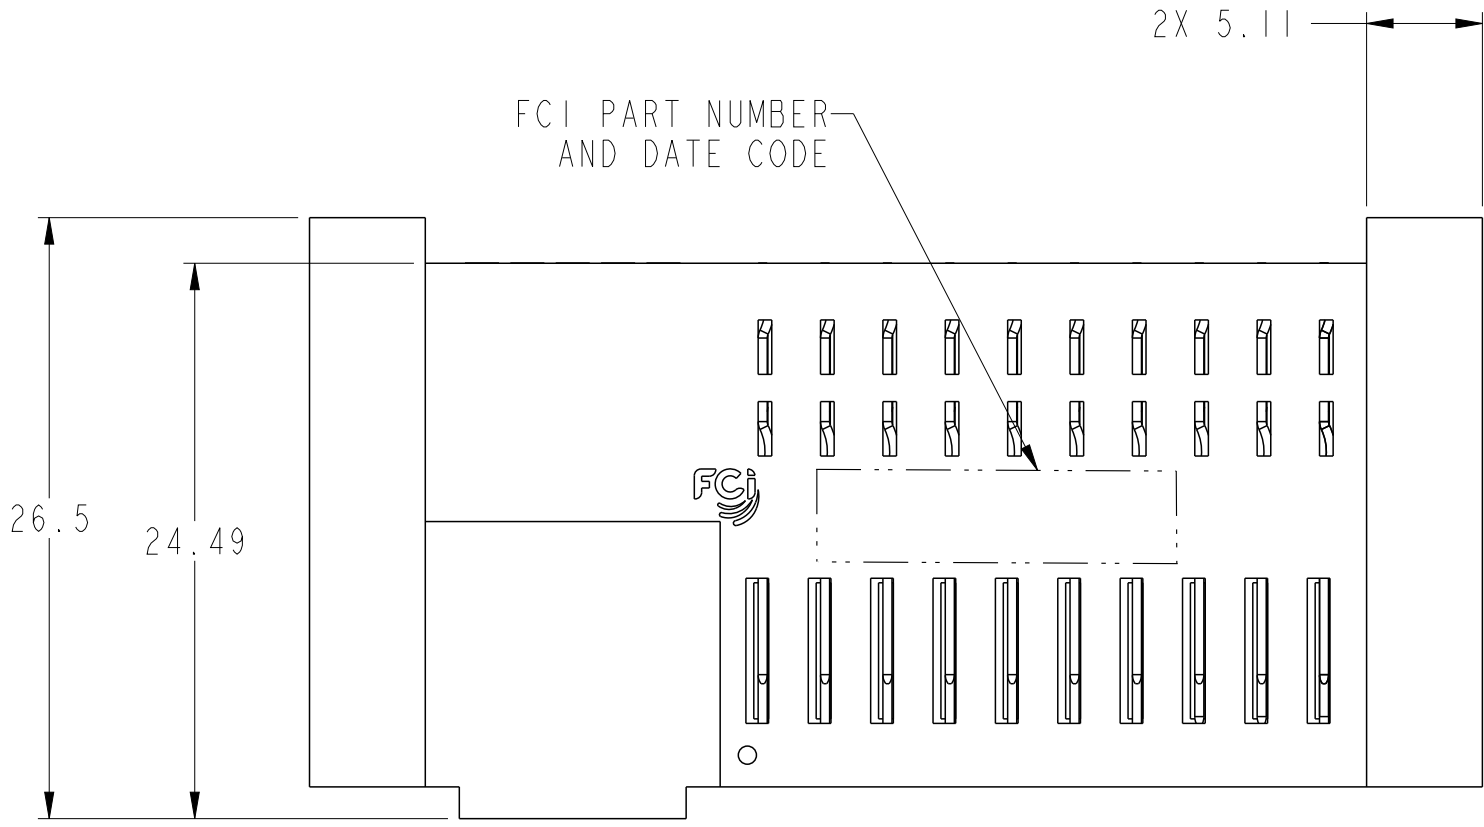

HOLE DOWN TYPE AS SHOWN

spec ref		SEE NOTE 10		dr		Zhang Hong-Tu		2012/08/13		projection MM		size		A2		scale		3:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		De-Ming Lu		2017/05/09				ecn no		ELX-DG-18076-1					
ISO 406				chr		Fancy Zhang		2017/05/23		rel level		Released							
ISO 1101				appr		Pei-Ming Zheng		2017/05/26		product family		PwrLoPro							
surface - ISO 1302		linear ✓ angular		0.X ±0.30 0.XX ±0.20 0.XXX ±0.10		Amphenol FCI		title		PWR LoPro HEADER ASSEMBLY RA, PASSIVE GUIDE, S+P		dwg no 10122460		rev		H			
						cat. no.		-		Product - Customer Drw		sheet 4 of 10							

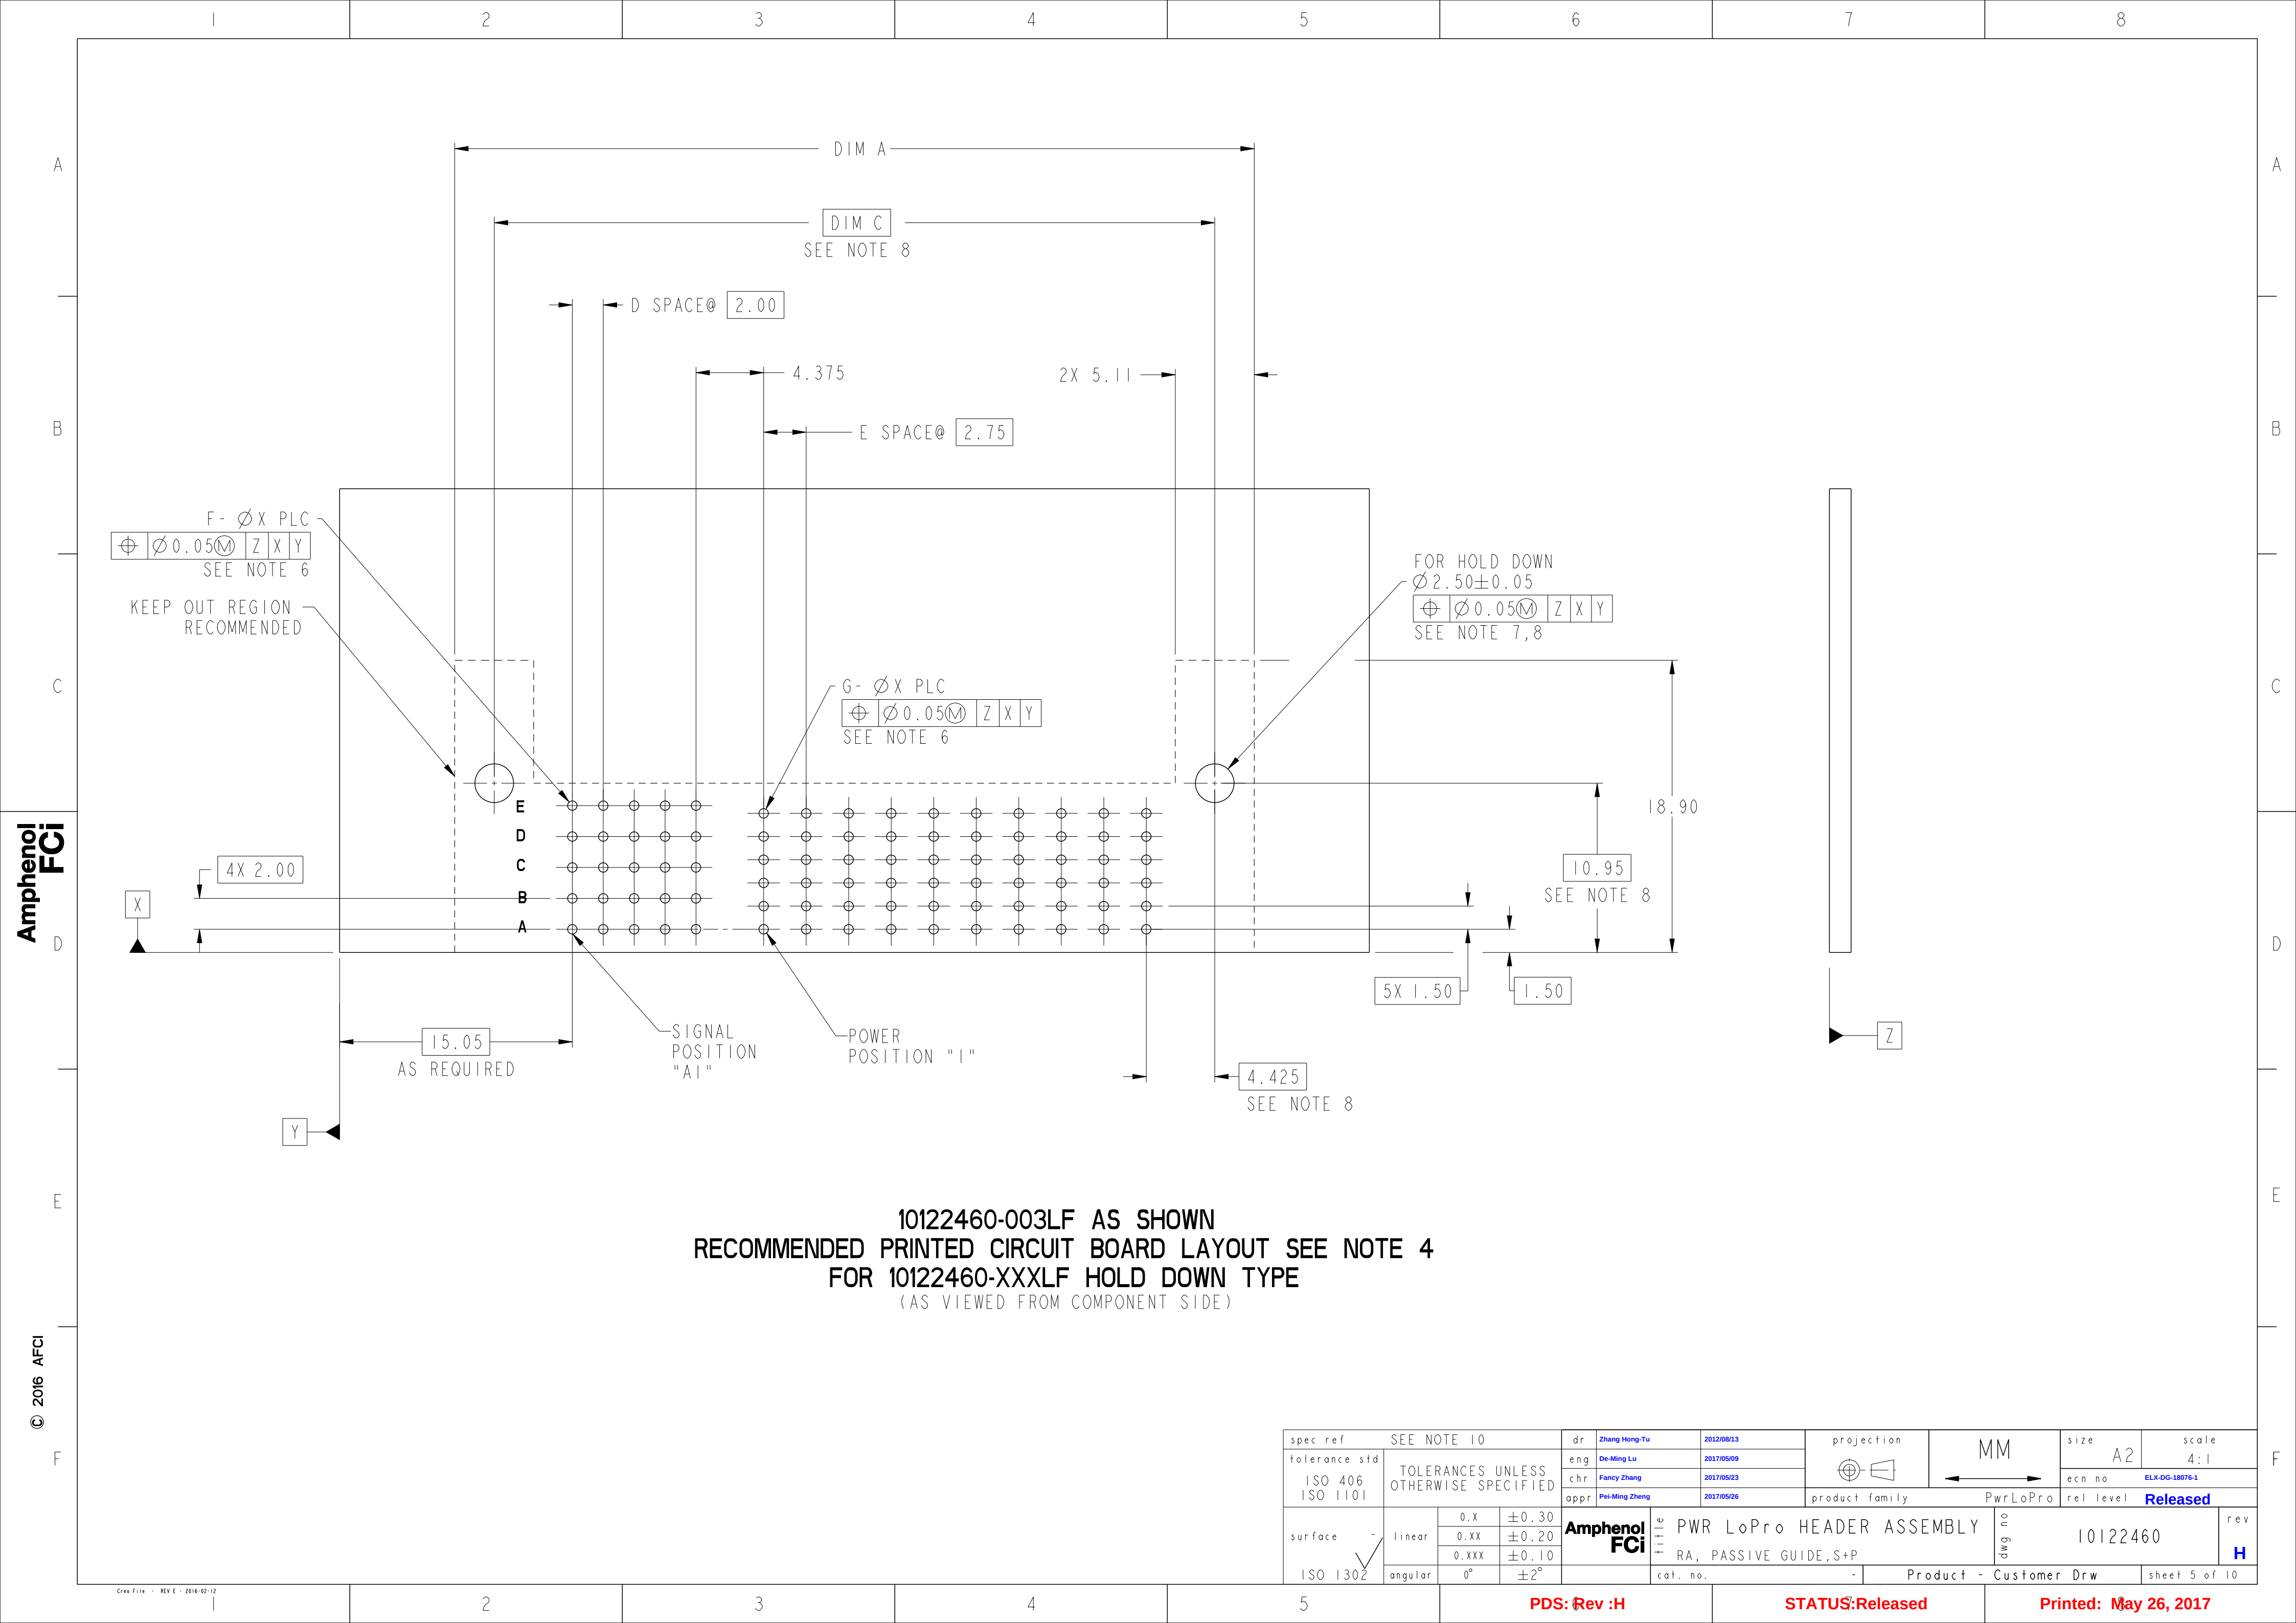

Amphenol
FCi

© 2016 AFCi

10122460-003LF AS SHOWN
RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT SEE NOTE 4
FOR 10122460-XXXLF HOLD DOWN TYPE
(AS VIEWED FROM COMPONENT SIDE)

spec ref		SEE NOTE 10		dr		Zhang Hong-Tu		2012/08/13		projection		MM		size		A2		scale		4:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		De-Ming Lu		2017/05/09						ecn no		ELX-DG-18076-1					
ISO 406						chr		Fancy Zhang		2017/05/23						product family		PwrLoPro		rel level		Released	
ISO 1101						appr		Pei-Ming Zheng		2017/05/26													
surface		linear		0.X		±0.30		Amphenol FCI		title		PWR LoPro HEADER ASSEMBLY RA, PASSIVE GUIDE,S+P		dwg no		10122460		rev		H			
ISO 1302		0.XX		±0.20																			
		0.XXX		±0.10		cat. no.																-	
angular		0°		±2°																			

PDS: Rev :H


STATUS:Released

Printed: May 26, 2017

1		2		3		4		5		6		7		8	
A	PART NUMBER	CONFIGURATION	DIM "A"	DIM "B" FOR SCREW MOUNT	DIM "C" FOR HOLD DOWN	"D" SPACES	"E" SPACES	"F" QTY.	"G" QTY.	MOUNTING FEATURE					
	10122460-001LF	35S+18P	77.71	-	72.60	6	17	35	108	HOLD DOWN					
	10122460-003LF	25S+10P	51.71	-	46.6	4	9	25	60	HOLD DOWN					
	10122460-004LF	25S+8P	46.21	-	41.1	4	7	25	48	HOLD DOWN					
	10122460-005LF	25S+10P	51.71	-	46.6	4	9	25	60	HOLD DOWN					
	10122460-006LF	25S+8P	46.21	-	41.1	4	7	25	48	HOLD DOWN					
	10122460-007LF	25S+10P	51.71	47.31	-	4	9	25	60	SCREW MOUNT					
	10122460-008LF	15S+2P	25.71	-	15.1	2	1	15	12	HOLD DOWN					
	10122460-009LF	25S+10P	51.71	-	46.6	4	9	25	60	HOLD DOWN					
	10122460-010LF	35S+20P	83.21	-	78.1	6	19	35	120	HOLD DOWN					
	10122460-011LF	25S+02P	29.71	-	24.6	4	1	25	12	HOLD DOWN					
	10122460-013LF	25S+10P	51.71	47.31	-	4	9	25	60	SCREW MOUNT					
B															
C															
	D														
E															
	F														

Amphenol
FCi

© 2016 AFci

spec ref	SEE NOTE 10			dr	Zhang Hong-Tu	2012/08/13	projection  MM	size	A2	scale	3:1			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	De-Ming Lu	2017/05/09		ecn no	ELX-DG-18076-1					
chr				Fancy Zhang	2017/05/23									
appr				Pei-Ming Zheng	2017/05/26									
surface	linear	0.X	±0.30	Amphenol FCi	title			PWR LoPro HEADER ASSEMBLY			dwg no	10122460	rev	H
		0.XX	±0.20											
		0.XXX	±0.10											
ISO 1302	angular	0°	±2°											

Creo File - REV E - 2016-02-12

1

2

3



4

5


PDS: Rev :H

STATUS:Released


Printed: May 26, 2017

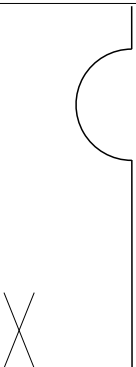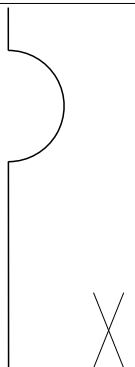CUSTOMER LOADING WORKSHEET FOR SIGNAL & POWER SEQUENCING LEVELS																																					
PWR LO PRO - MATING FACE OF HEADER CONNECTOR(4)																																					
E										COLUMNS																											
D																																					
C																																					
B																																					
A																																					
ROWS	MOUNTING FEATURE (3)	1	2	3	4	5	6	7	8		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	MOUNTING FEATURE (3)		
		SIGNAL CONTACTS(2)									POWER CONTACTS(1)																										


- 1). LOAD WITH CHOICE OF 2 POWER CONTACT MATING LEVELS, SEE SECTIONS KM & KR FOR AVAILABLE LEVEL OPTIONS.
- 2). LOAD WITH CHOICE OF 3 SIGNAL CONTACT MATING LEVELS, SEE SECTIONS KA,KB,&KC FOR AVAILABLE LEVEL OPTIONS.
- 3). MOUNTING FEATURE OPTION "X"
- H : HOLD DOWN TYPE
- S : SCREW MOUNT TYPE
- 4). CUSTOMER LOADING WORKSHEET SHOWN AT MAXMUM SIZE CONFIGURATION (40Sx24P), SIGNALS AVAILABLE IN 2,3,4 THRU 8 POSITIONS, POWERS AVAILABLE IN 4,6,8 THRU 24 POSITIONS IN EVEN QUANTITIES ONLY.

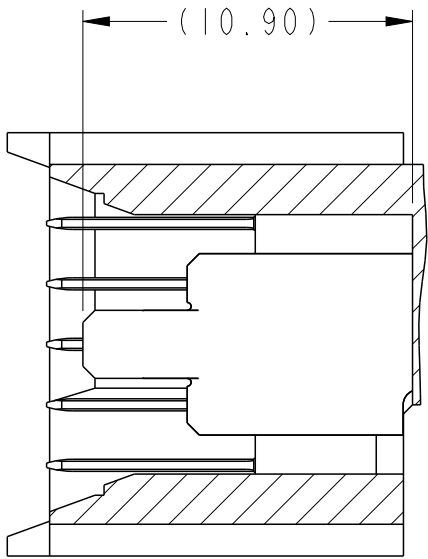


POWER
SECTION KM-KM
LEVEL 1:
LONGEST MATING
CONTACTS

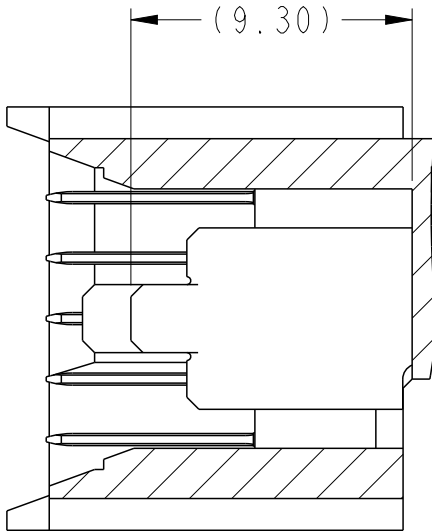


POWER
SECTION KR-KR
LEVEL 2:
SHORTEST MATING
CONTACTS

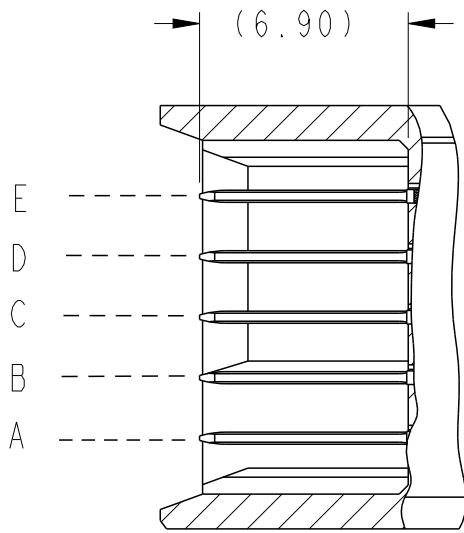

SIGNAL
SECTION KA-KA
LEVEL 2:
ALL LONGEST
CONTACTS

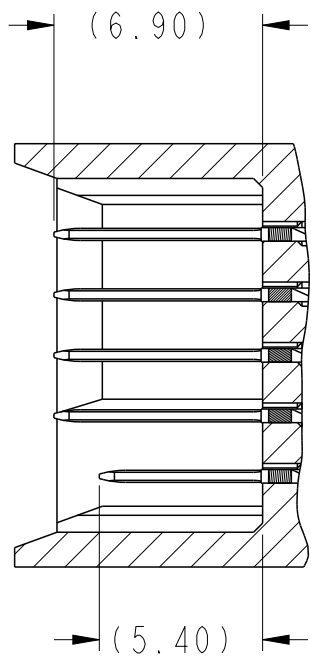

SIGNAL
SECTION KB-KB
LEVEL 32222 (MIXED):
ROW "A", SHORTEST CONTACT
ROW "B" THRU "E", LONGEST CONTACTS

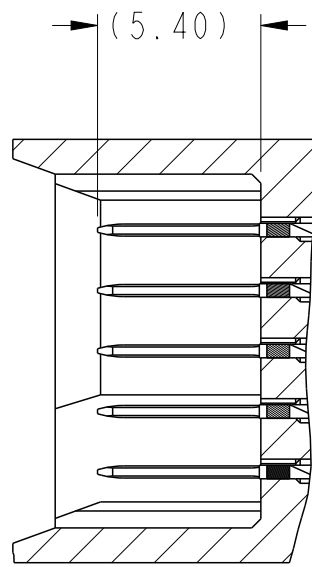

SIGNAL
SECTION KC-KC
LEVEL 3:
ALL SHORTEST
CONTACTS

spec ref		SEE NOTE 10			dr		Zhang Hong-Tu		2012/08/13		projection		MM		size		A2		scale		1:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		De-Ming Lu		2017/05/09						ecn no		ELX-DG-18076-1					
ISO 406					chr		Fancy Zhang		2017/05/23						rel level		Released					
ISO 1101					appr		Pei-Ming Zheng		2017/05/26						product family		PwrLoPro					
surface					linear		Amphenol FCI		title						PWR LoPro HEADER ASSEMBLY RA, PASSIVE GUIDE,S+P		dwg no		10122460		rev	
ISO 1302		angular		0°		±2°		cat. no.		-		Product - Customer Drw		sheet 7 of 10								

1		2				3				4				5				6				7				8				
A	PART NUMBER	ROWS		SIGNALS							POWERS																			
				1	2	3	4	5	6	7	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18		
	10122460-001LF 35S + 18P	E	H																											
		D																												
		C																												
		B																												
A			3	3																										
B	PART NUMBER	ROWS		SIGNALS					POWERS																					
				1	2	3	4	5	1	2	3	4	5	6	7	8	9	10												
	10122460-003LF 25S + 10P	E	H																											
		D																												
		C																												
		B																												
A			2	2																										32222
C	PART NUMBER	ROWS		SIGNALS					POWERS																					
				1	2	3	4	5	1	2	3	4	5	6	7	8														
	10122460-004LF 25S + 8P	E	H																											
		D																												
		C																												
		B																												
A			2	2																										32222
D	PART NUMBER	ROWS		SIGNALS					POWERS																					
				1	2	3	4	5	1	2	3	4	5	6	7	8														
	10122460-005LF 25S + 10P	E	H																											
		D																												
		C																												
		B																												
A			2	2																										2
E	PART NUMBER	ROWS		SIGNALS					POWERS																					
				1	2	3	4	5	1	2	3	4	5	6	7	8	9	10												
	10122460-005LF 25S + 10P	E	H																											
		D																												
		C																												
		B																												
A			2	2																										2
F	PART NUMBER	ROWS		SIGNALS					POWERS																					
				1	2	3	4	5	1	2	3	4	5	6	7	8	9	10												
	10122460-005LF 25S + 10P	E	H																											
		D																												
		C																												
		B																												
A			2	2																										2
VIEWED FROM MATING FACE:																														

A	1		2					3					4					5					6					7					8																																																																																																																																																																																																																																																																																																																																																																																																																																	
	PART NUMBER	ROWS		SIGNALS					POWERS																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				1	2	3	4	5	1	2	3	4	5	6	7	8																																																																																																																																																																																																																																																																																																																																																																																																																																																		
	10122460-006LF 25S + 8P	E	H		2	2	32222	2	2	1	1	2	2	2	2	2	1		H																																																																																																																																																																																																																																																																																																																																																																																																																																															
		D																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		C																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		B																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		A																																																																																																																																																																																																																																																																																																																																																																																																																																																																
	B	1		2					3					4					5					6					7					8					9					10																																																																																																																																																																																																																																																																																																																																																																																																																						
PART NUMBER		ROWS		SIGNALS					POWERS																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				1	2	3	4	5	1	2	3	4	5	6	7	8	9	10																																																																																																																																																																																																																																																																																																																																																																																																																																																
10122460-007LF 25S + 10P		E	S		2	2	2	2	3	2	2	2	2	2	2	2	2	2	2	2		S																																																																																																																																																																																																																																																																																																																																																																																																																																												
		D																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		C																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		B																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		A																																																																																																																																																																																																																																																																																																																																																																																																																																																																
C		1		2					3					4					5					6					7					8					9					10																																																																																																																																																																																																																																																																																																																																																																																																																						
	PART NUMBER	ROWS		SIGNALS					POWERS																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				1	2	3	1	2																																																																																																																																																																																																																																																																																																																																																																																																																																																										
	10122460-008LF 15S + 2P	E	H		32222	2	2	1	2																																																																																																																																																																																																																																																																																																																																																																																																																																																									</

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru