

ProtoBoard-1553B – for Hammond 1553B Boxes



Features

ProtoBoard saves time! The PCB is designed specifically for the Hammond 1553B box. No cutting is required. The mounting holes are present in the right spots.

The convenient 2-hole ProtoBoard pattern provides an easy way to connect parts while maximizing usable board area.



Lead free etched copper PCB with an anti-tarnish coating for easy soldering.

PCB Specifications

- High-quality FR4 glass epoxy board.
- Four 0.125" (1/8") mounting holes.
- Four 4-40 PCB mounting screws provided.
- Single sided, 1oz/ft² copper PCB
- 0.042" holes drilled on 0.1" centers
- PCB Size 4.3 x 2.6 in. (109.2 x 66 mm)

Order Part# PR1553B (for PCB only)


Board Layout (actual size)

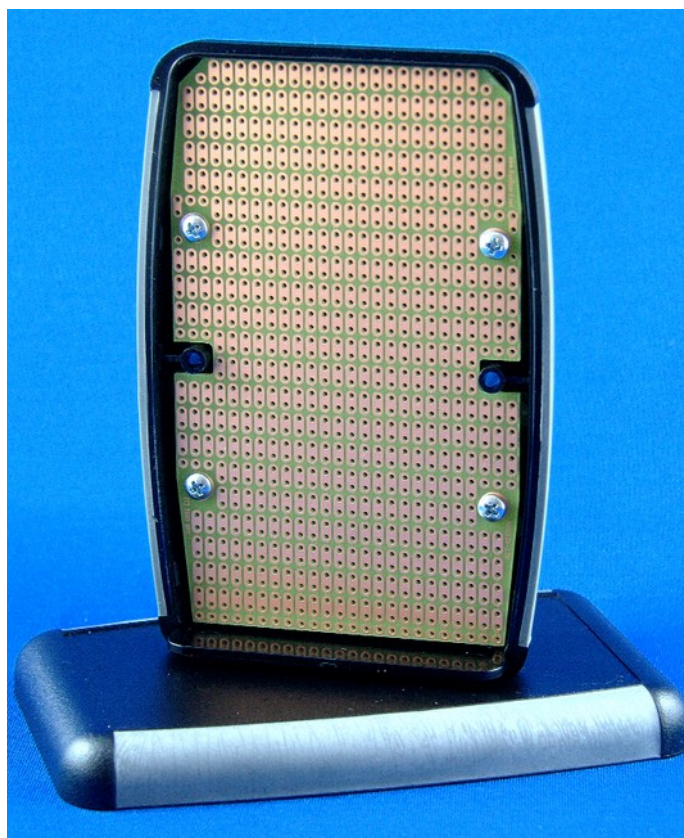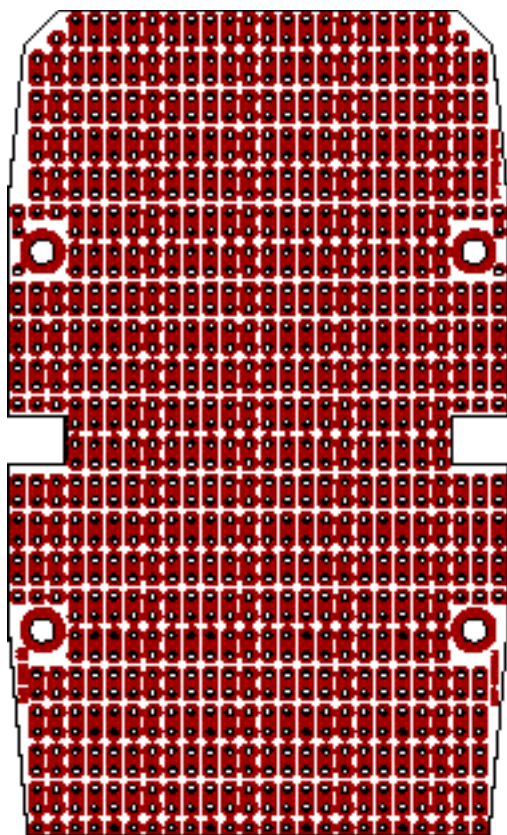

PR1553B Prototyping Board shown with the Hammond 1553BBK box (box not included).

To purchase the PCB + Box together,
order BPS part# KIT-1553B-BK

PCB Mechanical Dimensions

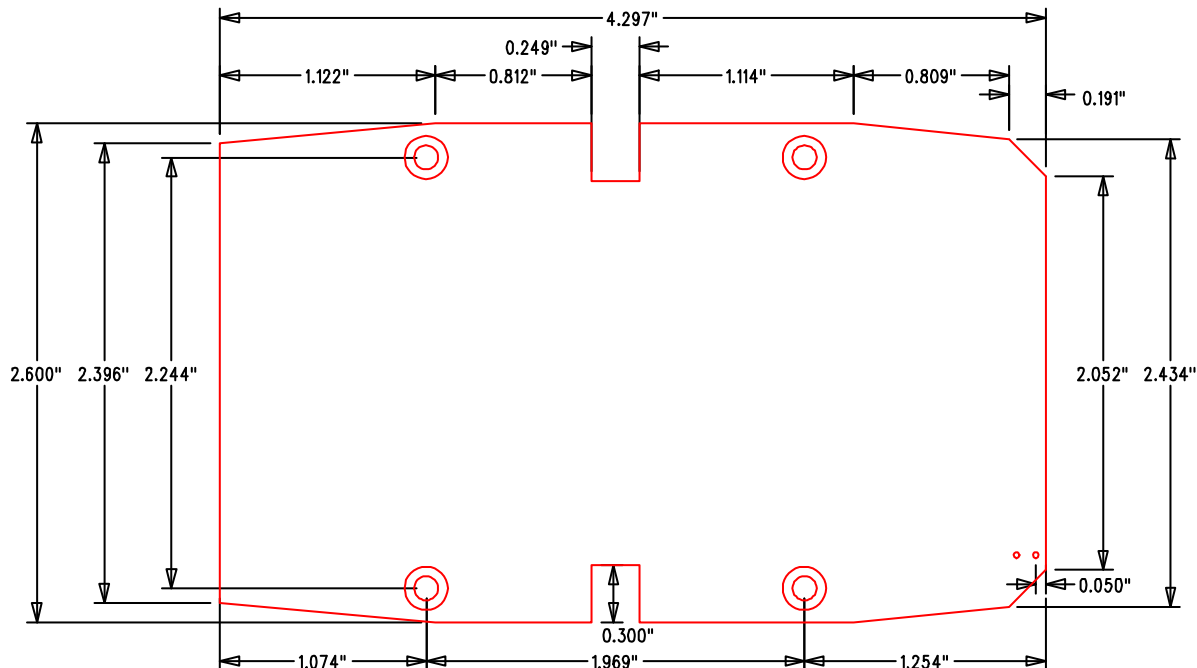

1. PCB is symmetrical along the centerline.
 2. All solder pads are located on a 0.100" grid.
 3. The mounting holes are NOT located on the 0.100" grid.
- PCB Design Copyright 2005 BusBoard Prototype Systems Ltd.

Hammond 1553B Hand Held Case Features

Note: The box is **NOT** included with BPS part# PR1553B.

The box is included with part# KIT-1553B-BK.

Soft-sided ergonomic hand held electronic case.

Box Size 4.6 x 3.1 x 1.0 inches (117 x 79 x 24mm)

1 removable end panel (included).

Built-in PCB standoffs.

Box closed with self tapping screws (included).

Recessed top for membrane display or keypad.

Lap joint construction provides protection against dust accumulation and splashing water.

Gray/Gray, Black/Gray, Black/Black, Yellow, Red, and Translucent Blue colors available.

To order the box by itself, use Hammond part #'s 1553BGY, 1553BBK, 1553BBKKBK, 1553BTBUBK, 1553BRDBK, 1553BYLBK

See <http://www.hammondmfg.com/1553.htm>
<http://www.hammondmfg.com/1553colors.htm>

© 2013 BusBoard Prototype Systems Ltd.



BusBoard Prototype Systems - Built for designers

www.BusBoard.com sales@busboard.com

BPS-MAR-PR1553B-001 Rev 4.10



1553BBKBK



1553BTBUBK



1553BRDBK



1553BYLBK

1553BGY



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru