

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD

REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER


FOR REPLACEMENT PARTS FOR APPLICATOR REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED) WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS:		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME		
		PRODUCT SPEC	RESTRICTED TO		
		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	WEIGHT	A3	C-	
		SCALE	SHEET	OF	REV



PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION
1855045-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER
1855045-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER
1855045-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER
1855045-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER
7-1855045-7	A	-	-	-	SPARE PARTS

- △ 1 RECOMMENDED SPARE PARTS
- △ 2 GREASE LIGHTLY
- △ 3 GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ 4 APPLY TORO-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY PN 1-23419-5 LOC-TITE TO THREADS.

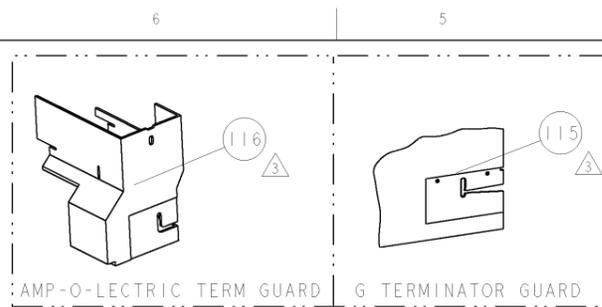


TERMINAL NAME: JUNIOR POWER TIMER CONTACT				
SOCKET	PIN	AMP TERMINAL - AMP CRIMP SPECS		
927766	-			
929937	-	REF SETTING	CRIMP HEIGHT	WIRE SIZE
-	-	B2	.070±.002[1.77±0.05mm]	2.50mm2
-	-	C1	.065±.002[1.64±0.05mm]	2.00mm2
-	-	D2	.059±.002[1.51±0.05mm]	1.5mm2
SEAL PN.	-	CRIMP	SIZE	TYPE
828905	-	WIRE	.110 [2.80mm]	F
-	-	INSUL	.170 [4.33mm]	O
				Ø .087-.118
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE
.193-.217	114-18050	.551	408-8040	458637-1

REV A		REV 66		REVISIONS			
REV	DATE	BY	CHKD	DESCRIPTION	DATE	BY	CHKD
A				PRODUCT RELEASE			

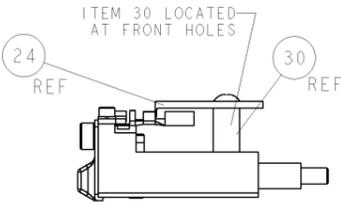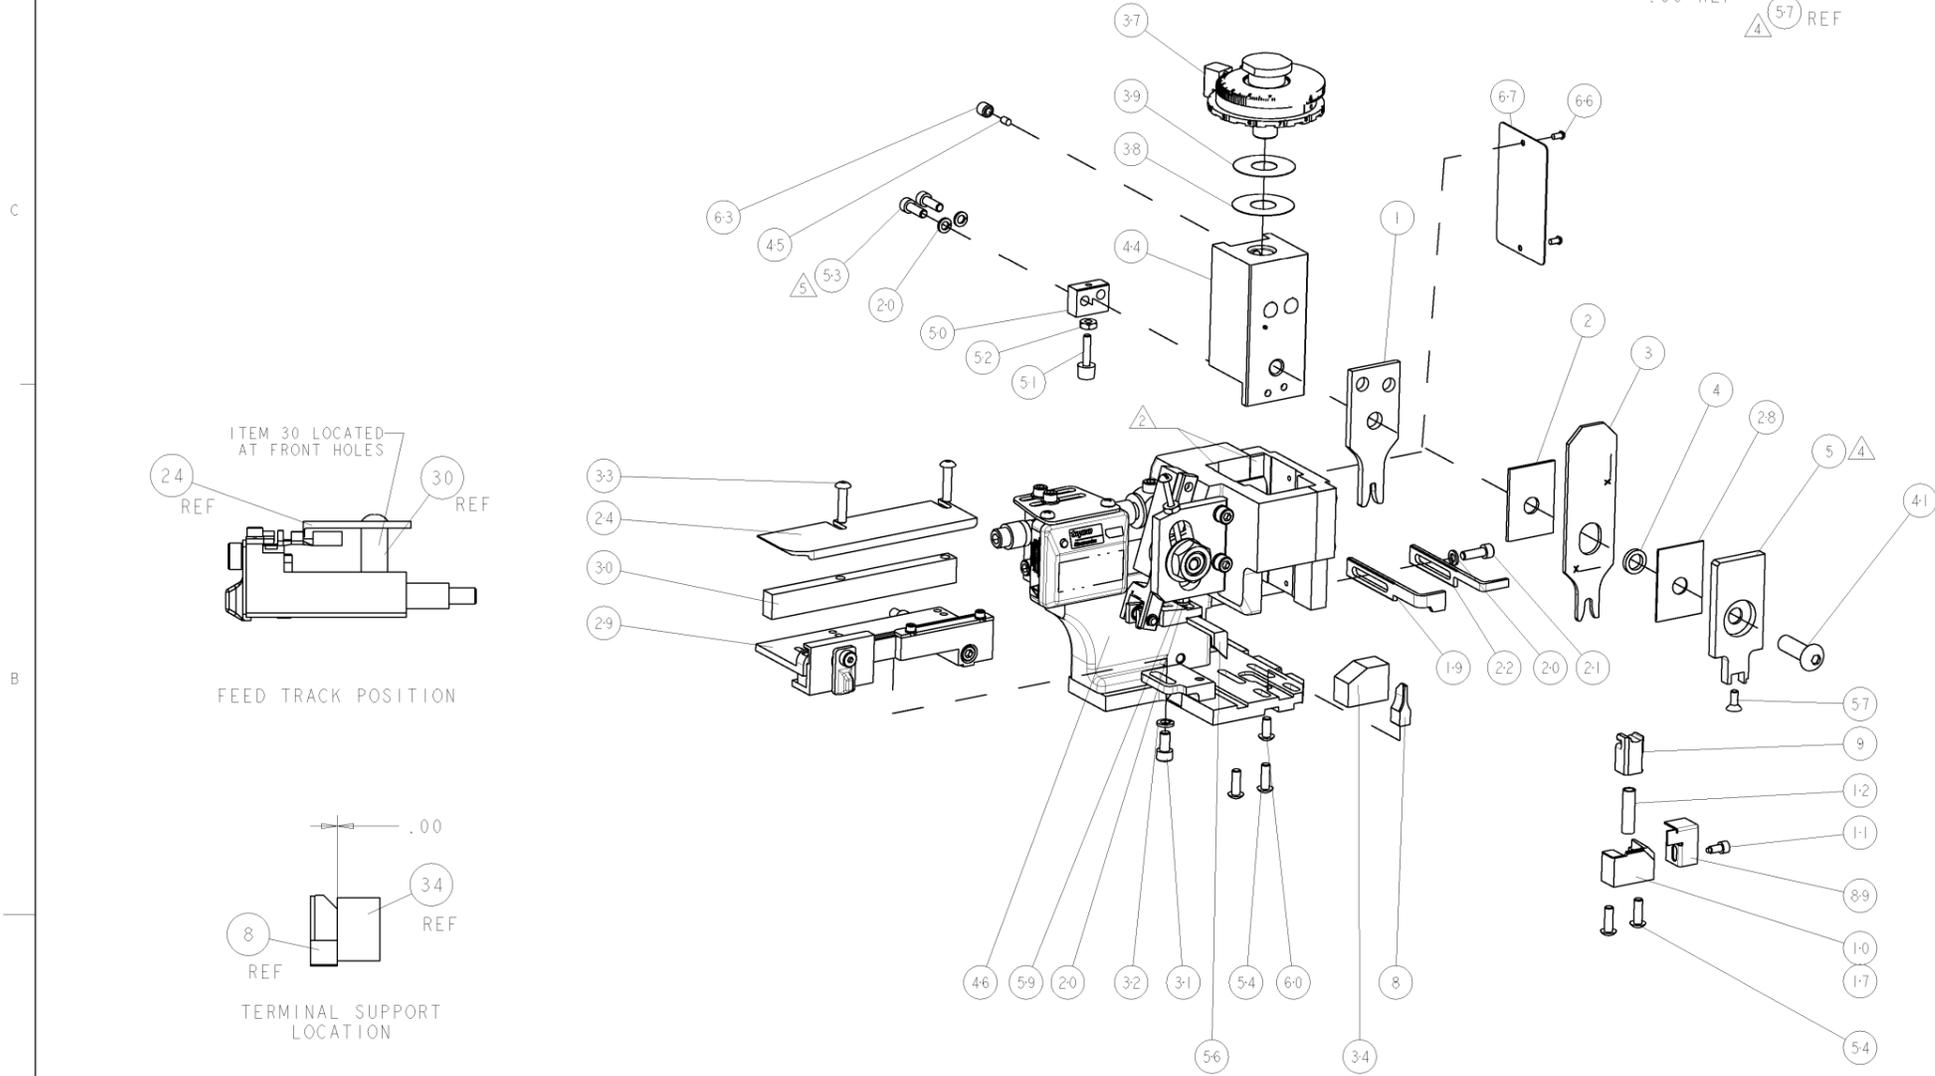


FEED TRACK POSITION



TERMINAL SUPPORT LOCATION

△ 3	-	-	-	REF	-	...	455749-1	GUARD WINDOW	116
△ 3	-	-	-	REF	-	...	679532-1	INSERT, GUARD	115
-	-	-	-	-	-	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	-	-	-	-	-	-	318563-1	GUARD, FRONT CHIP	89
-	-	-	-	-	-	-	4088040	SF APPL INST 408-8040	72
-	-	-	-	-	-	-	217238-1	GENERAL INSTRUCTION PKG	71
-	-	-	-	-	-	-	461264-5	PLATE, IDENTIFICATION	67
-	-	-	-	-	-	-	21017-2	SCREW, DRIVE	66
-	-	-	-	-	-	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	-	-	-	-	-	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	-	-	-	-	-	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	-	-	-	-	-	-	1-21003-9	SCR, FLT SKT HD CAP 6-32 X .375	57
-	-	-	-	-	-	-	458537-2	PAWL, FEED	56
-	-	-	-	-	-	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	-	-	-	-	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
-	-	-	-	-	-	-	21018-5	NUT, HEX, REG 6-32	52
-	-	-	-	-	-	-	811242-2	BUMPER, HOLD DOWN	51
-	-	-	-	-	-	-	690753-1	SPACER, TONKER	50
-	-	-	-	-	-	-	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	-	-	690602-5	CAM, PRE FEED, 1 1/8	48
-	-	-	-	-	-	-	690501-4	CAM, POST FEED, 1 5/8	47
-	-	-	-	-	-	-	459456-2	APPL, BASIC SUB ASSY (SIDE WISE MOCA)	46
-	-	-	-	-	-	-	690191-1	PLUG, NYLON	45
-	-	-	-	-	-	-	455673-1	RAM, SIDE FEED	44
-	-	-	-	-	-	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	-	-	-	-	-	-	690125-1	SHIM SUB-ASSY	39
-	-	-	-	-	-	-	469367-1	SHIM	38
-	-	-	-	-	-	-	879103-2	FINE ADJUST HEAD SUBASSY	37
-	-	-	-	-	-	-	2-690786-3	TERMINAL SUPPORT	34
-	-	-	-	-	-	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	-	-	-	-	-	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	-	-	-	-	-	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	-	-	-	-	-	-	1320908-8	SPACER, STRIP GUIDE	30
-	-	-	-	-	-	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	-	-	-	-	-	-	455888-7	SPACER, CRIMPER	28
-	-	-	-	-	-	-	1320928-1	PLATE, STRIP GUIDE	24
-	-	-	-	-	-	-	690472-2	STRIPPER	22
-	-	-	-	-	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	-	-	-	-	-	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-	-	691353-1	STRIPPER	19
△	-	-	-	-	-	-	679625-2	SHEAR HOLDER, FRONT (NO CUT)	17
-	-	-	-	-	-	-	3-22280-3	SPRING, COMPRESSION	12
-	-	-	-	-	-	-	690461-2	STOP, SHEAR	11
△	-	-	-	-	-	-	1-690459-0	SHEAR HOLDER, FRONT	10
△	-	-	-	-	-	-	318707-1	FLOATING SHEAR, FRONT	9
△	-	-	-	-	-	-	9-854014-5	ANVIL, COMBINATION	8
△	-	-	-	-	-	-	318701-1	DEPRESSOR, SHEAR	5
-	-	-	-	-	-	-	238011-8	BLOCK, CRIMPER SPACER	4
△	-	-	-	-	-	-	3-683454-7	CRIMPER, INSULATION O	3
-	-	-	-	-	-	-	1-455888-4	SPACER, CRIMPER	2
△	-	-	-	-	-	-	2-456408-8	CRIMPER, WIRE PREMIUM	1
-77	-6	-3	-2	-1	U/M	PART NO	DESCRIPTION		ITEM NO

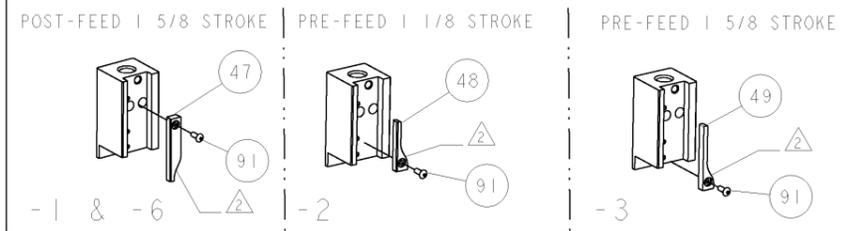

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL		FINISH		WEIGHT		CUSTOMER DRAWING	
0 PLC	± .01	1 PLC	± .01								
2 PLC	± .01	3 PLC	± .01								
4 PLC	± .001	ANGLES									
SCALE 3:5		SHEET 1 OF 1		REV A		DATE 19MAR2006		DRAWN J. ELAIN		CHECKED C. REICHELDERFER	
APPROVED T. ELAIN		DATE 19MAR2006		NAME		tyco Electronics		Harrisburg, PA 17105-3608		PRODUCT SPEC	
APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		CUSTOMER DRAWING	
		A		00779		1855045				CUSTOMER VIEWABLE ASSEMBLY	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru