


D

THIS DRAWING AND DESIGN HEREON CONSTITUTE A PROPRIETARY DESIGN OF PACKARD ELECTRIC DIVISION AND IS NOT TO BE DUPLICATED OR REPRODUCED WITHOUT AUTHORITY OF PACKARD ELECTRIC DIVISION.


DO NOT SCALE

PART NO. 1200 4552


PART NO. 1200 4552

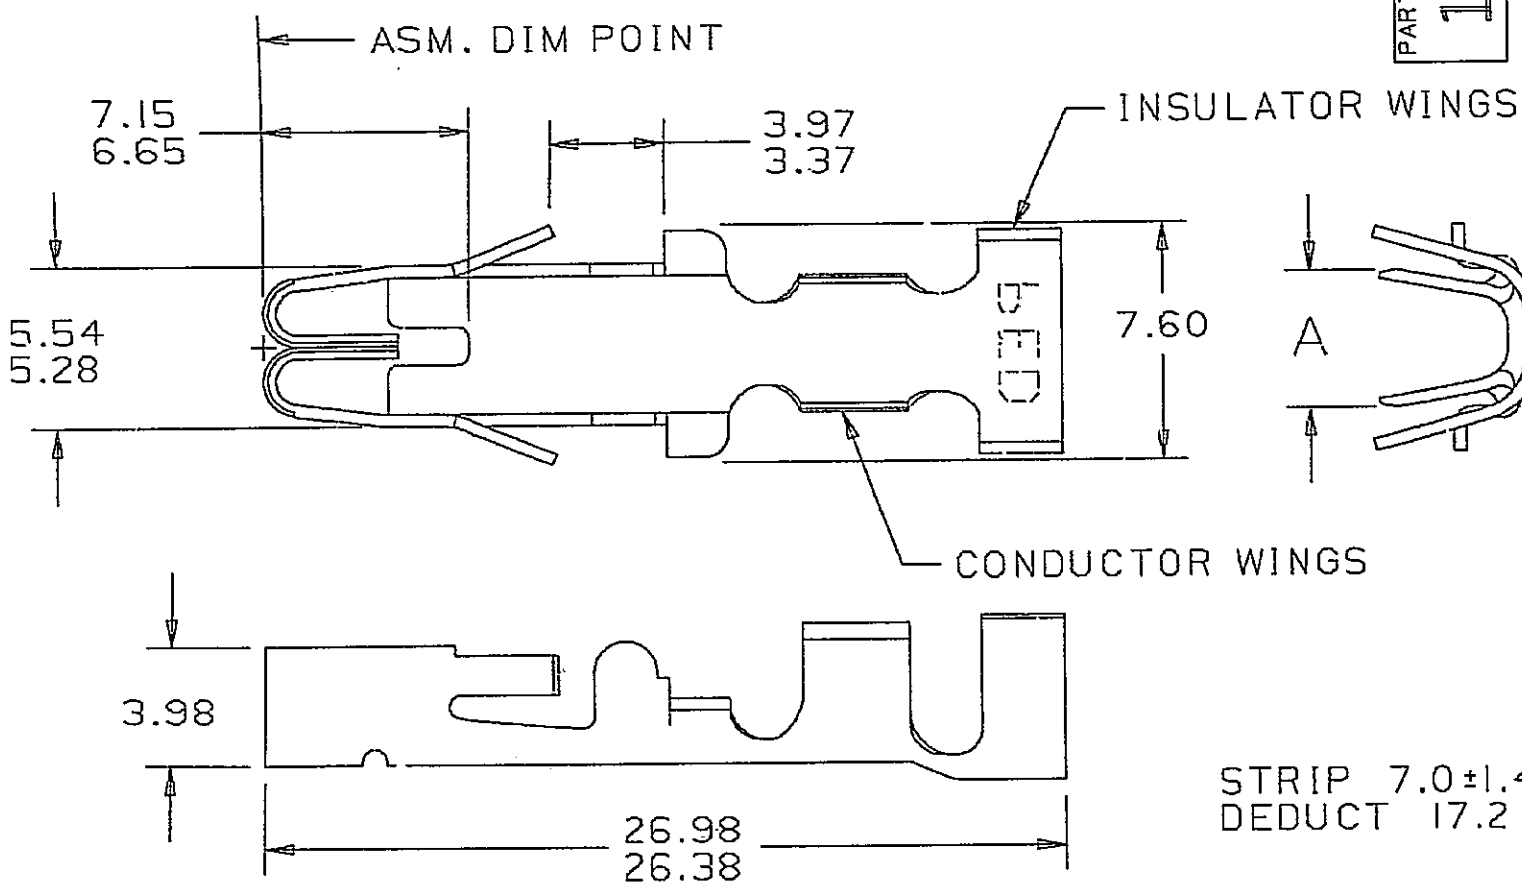


TYPE 1

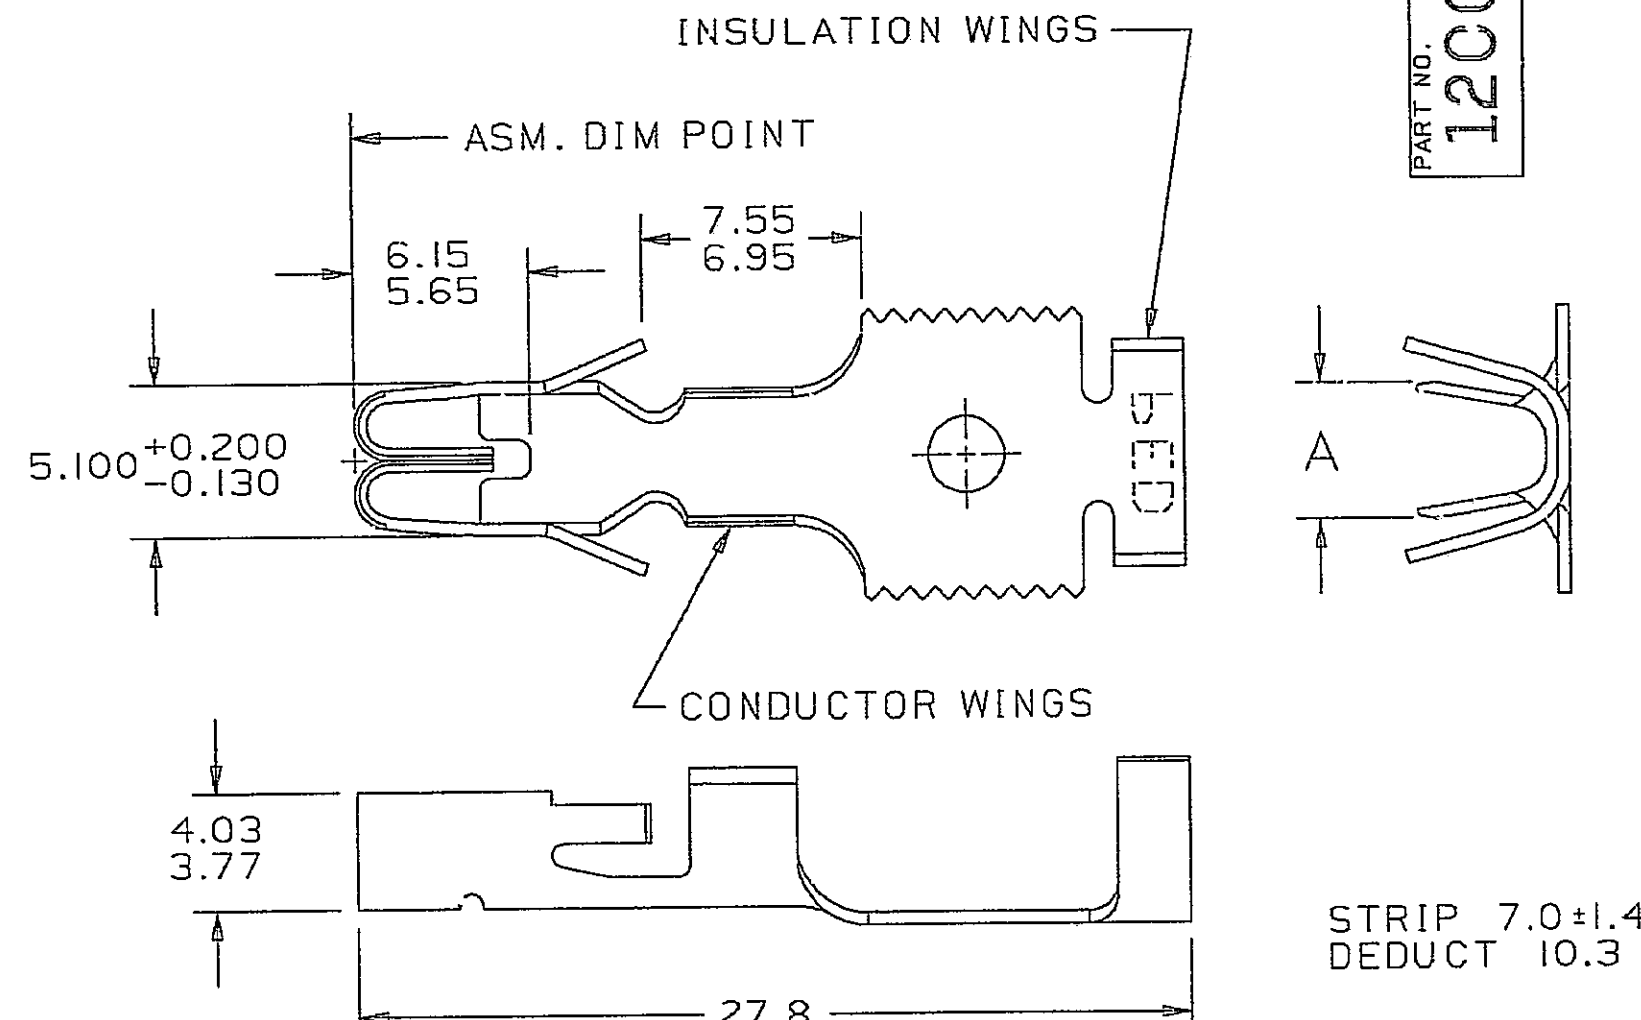

TYPE 2

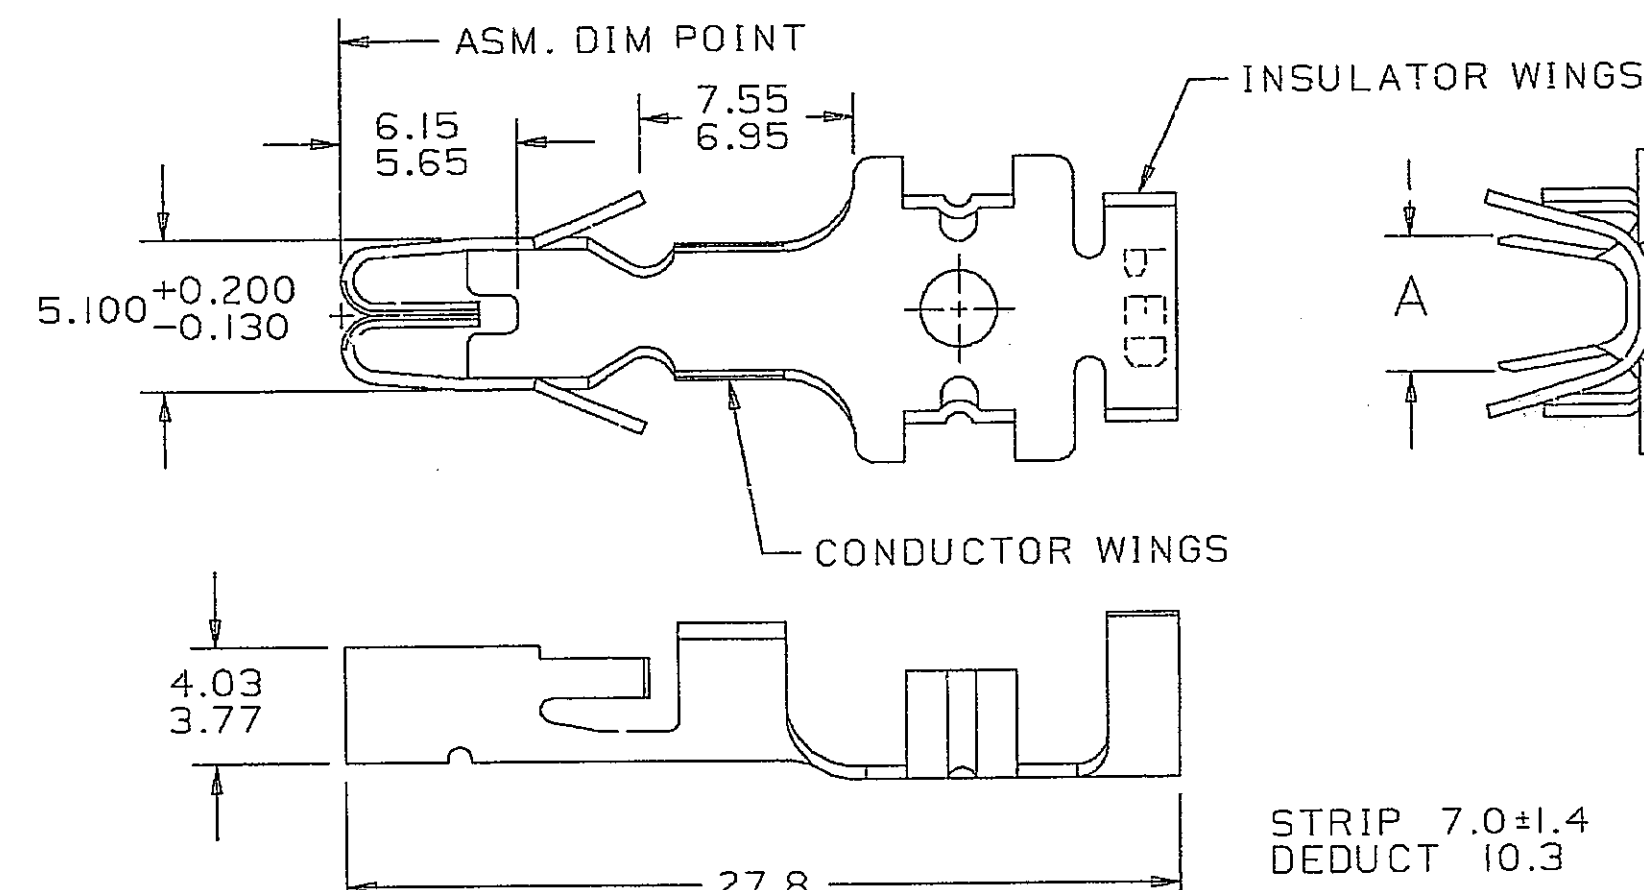

TYPE 3

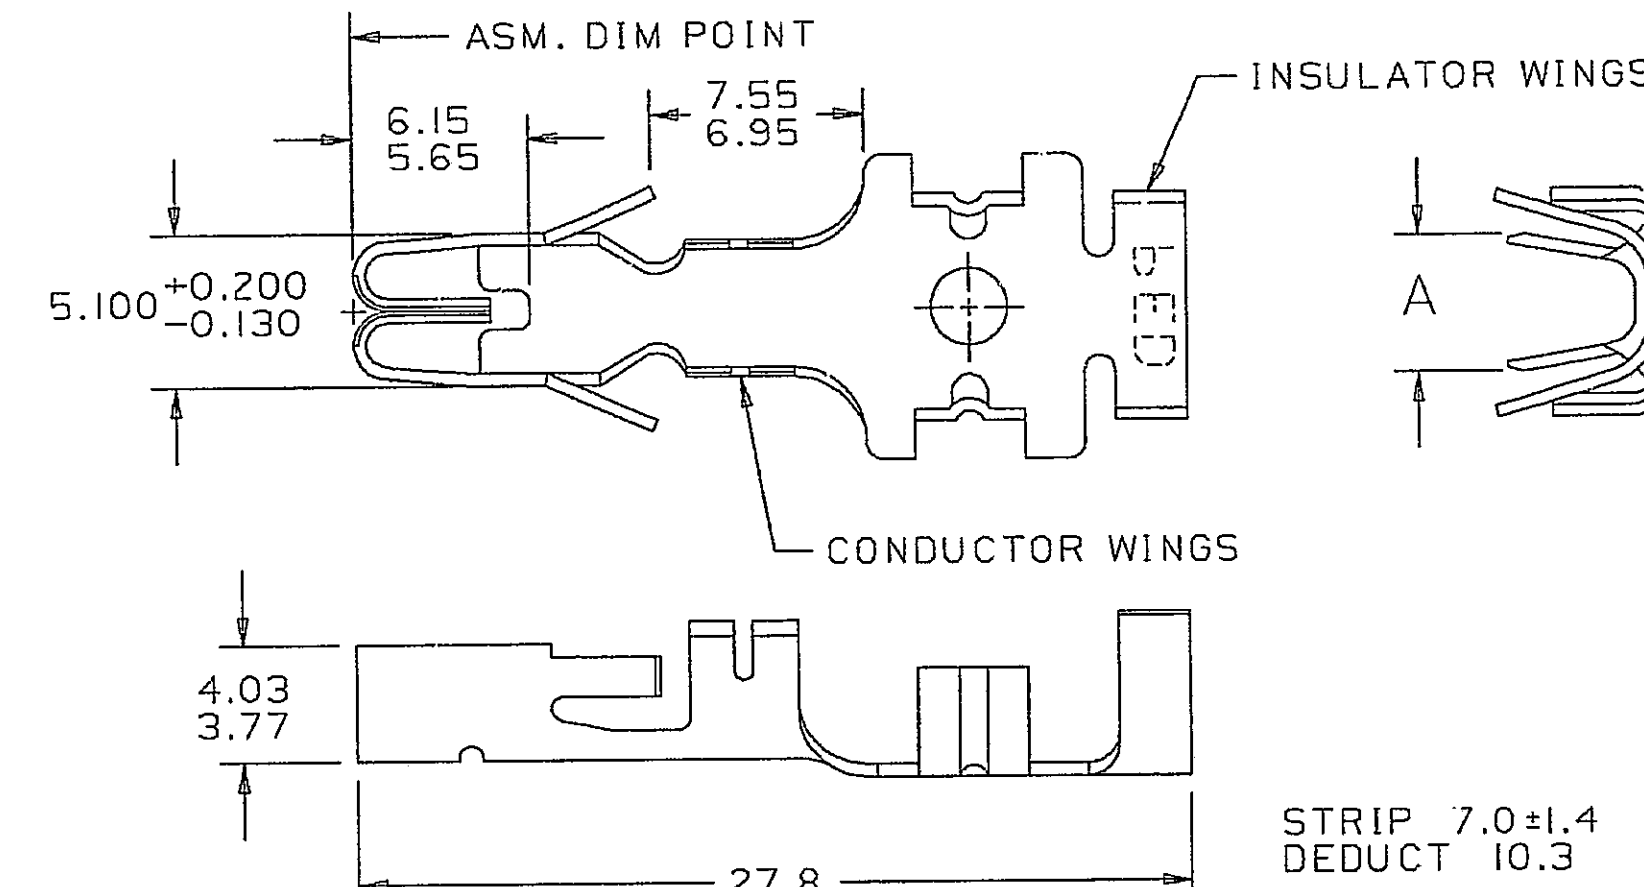

TYPE 4

12089823	B1		0.406 THK SAE CA 260 BRASS	12010636	▲ F1		1	2.0-1.0	3.95	15	4.4
			0.406 THK SAE CA 260 COPPER	12078138	B1		4	0.8-0.5	3.10	19	3.2
			0.406 THK SAE CA 260 COPPER	12078136	B1		4	5.0-3.0	5.10	11	4.6
12078033	B1	OBsolete	0.406 THK SAE CA 260 BRASS	12078137	▲ B1		4	3.0	3.20	12	3.3
12078032	B1	OBsolete	0.406 THK SAE CA 260 BRASS				4	2.0-1.0	3.95	15	3.3
12078031	B1	OBsolete	0.406 THK SAE CA 260 BRASS				4	5.0-3.0	5.10	11	4.6
12066447	A	OBsolete	0.406 THK SAE CA 260 BRASS				2	0.8-0.5	3.10	19	3.8
12052443	B1		0.406 THK SAE CA 260 BRASS				2	3.0	3.10	12	4.6
12052209	B1		0.406 THK SAE CA 260 BRASS				1	3.0	3.10	12	4.6
12052208	B1		0.406 THK SAE CA 260 BRASS				1	1.0	2.25	16	4.4
			0.406 THK SAE CA 195 COPPER	12048293	● A	OBsolete	2	0.8-0.5	3.10	19	3.8
			0.406 THK SAE CA 195 COPPER	12048291	● A1		2	2.0-1.0	3.95	15	4.4
			0.406 THK SAE CA 195 COPPER	12048290	● A1		2	5.0-3.0	5.10	11	4.6
			0.406 THK SAE CA 195 COPPER	12048289	● A	OBsolete	2	TWO 2.0-1.0	3.10	215	6.0
			0.406 THK SAE CA 195 COPPER	12048281	● B1		1	TWO 0.8-0.5	2.55	219	4.7
			0.406 THK SAE CA 195 COPPER	12048280	● A	OBsolete	1	TWO 2.0-1.0	3.10	215	6.0
			0.406 THK SAE CA 195 COPPER	12048279	● B1		1	0.8-0.5	3.10	19	3.8
			0.406 THK SAE CA 195 COPPER	12048278	● B1		1	2.0-1.0	3.95	15	4.4
			0.406 THK SAE CA 195 COPPER	12048277	● B1		1	5.0-3.0	5.10	11	4.6
12020400	E1		0.406 THK SAE CA 260 BRASS	12089953	B1		2	2.0-1.0	3.95	15	4.4
12020338	D1		0.406 THK SAE CA 260 BRASS	2010637	▲ E1		2	5.0-3.0	5.10	11	4.6
12020337	D1		0.406 THK SAE CA 260 BRASS				2	0.8-0.5	2.55	219	4.7
12020336	E1	OBsolete	0.406 THK SAE CA 260 BRASS	12089952	B1		1	TWO 0.8-0.5	3.10	215	6.0
12020335	E1		0.406 THK SAE CA 260 BRASS				1	TWO 2.0-1.0	3.10	215	6.0
12020334	E1		0.406 THK SAE CA 260 BRASS	12089951	B1		1	0.8-0.5	3.10	19	3.8
12020321	E1		0.406 THK SAE CA 260 BRASS	2089950	B1		1	2.0-1.0	3.95	15	4.4
12015373	E1		0.406 THK SAE CA 260 BRASS				1	0.35-0.22	1.86	23	2.2
12004582	A	OBsolete	0.406 THK SAE CA 260 BRASS				3	TWO 0.8-0.5	2.55	219	4.7
12004581	A	OBsolete	0.406 THK SAE CA 260 BRASS				3	TWO 2.0-1.0	3.10	215	6.0
12004580	A	OBsolete	0.406 THK SAE CA 260 BRASS				3	0.8-0.5	3.10	19	3.1
12004579	A	OBsolete	0.406 THK SAE CA 260 BRASS				3	2.0-1.0	3.95	15	3.7
12004578	A	OBsolete	0.406 THK SAE CA 260 BRASS				3	5.0-3.0	5.10	11	4.6
12004562	D1	OBsolete	0.406 THK SAE CA 260 BRASS				2	TWO 2.0-1.0	3.10	215	6.0
12004561	D1	OBsolete	0.406 THK SAE CA 260 BRASS				2	TWO 0.8-0.5	2.55	219	4.7
12004560	E1	OBsolete	0.406 THK SAE CA 260 BRASS				2	0.8-0.5	3.10	19	3.8
12004559	E	OBsolete	0.406 THK SAE CA 260 BRASS				2	2.0-1.0	3.95	15	4.4
12004558	D	OBsolete	0.406 THK SAE CA 260 BRASS				2	5.0-3.0	5.10	11	4.6
12004557	E	OBsolete	0.406 THK SAE CA 260 BRASS				1	TWO 0.8-0.5	2.55	219	4.7
12004556	E	OBsolete	0.406 THK SAE CA 260 BRASS				1	TWO 2.0-1.0	3.10	215	6.0
12004555	F	OBsolete	0.406 THK SAE CA 260 BRASS				1	0.8-0.5	3.10	19	3.8
12004554	F	OBsolete	0.406 THK SAE CA 260 BRASS				1	2.0-1.0	3.95	15	4.4
12004553	E	OBsolete	0.406 THK SAE CA 260 BRASS				1	5.0-3.0	5.10	11	4.6
PART NO.	REV.	STATUS	MATERIAL	PART NO.	REV.	STATUS	TYPE	SIZE (MM ²)	DIA.	I.D.	A ±0.4
			UNPLATED			PLATED					

CABLE I.D. NUMBER (AS SPECIFIED IN CHART) IS LOCATED ON UNDERSIDE OF EACH TERMINAL.

■ INDICATES SERRATIONS IN CONDUCTOR WINGS.

▲ INDICATES MATERIAL (C260 ALLOY) IS TIN PLATED OVER COPPER PLATE.

● INDICATES MATERIAL (C195 ALLOY) IS SILVER PLATED OVER NICKEL PLATE.

INDICATES MATERIAL (C260 ALLOY) IS SILVER PLATED OVER NICKEL PLATE.

NOTE — CONTACT PACKARD ELECTRIC SALES DEPARTMENT CONCERNING CURRENT PRODUCT AVAILABILITY.

As of 06JL 90 this drawing is no longer being maintained on computer vision.

CAD CAM (JWP)		THIRD ANGLE PROJECTION	
METRIC			
DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
CODE NO.	6900	TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGULAR ± 2°
QC		DECIMAL: ONE PLACE ± 0.3 TWO PLACE ± 0.15	
DWG DATE 07JN78	SCALE NONE	DR.	
CD X TERM 12004552.00.01	CK R. SEBRELL	DATE 03AU84	
REFERENCE NO. 12004552 "D" SIZE SHT. #1, #2, & #6	APPR. R.D. KEARNS	DATE 040C84	
MATERIAL SPEC.			
SEE CHART			
NAME			
TERM F PAC/ON III			
PART NO.	1200 4552		SIZE D
OUTLINE DRAWING SHEET 1 OF 3			

C05D1974

PACKARD ELECTRIC

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru