



### Main

Range of product	Harmony XVB Universal
Product or component type	Complete beacon
Beacon or indicator bank unit type	Base unit with direct or tube fixing mode Illuminated unit
Signalling type	Flashing
Mounting diameter	2.76 in (70 mm)
Component name	XVBL
Material	Glass reinforced polyamide (base unit) Polycarbonate (illuminated unit)
Light source	Orange bulb not included
Bulb type	Incandescent with BA 15d Protected LED
[Us] rated supply voltage	48...230 V AC
Power dissipation in W	<= 7 W

### Complementary

Connections - terminals	Screw clamp terminals, connection capacity: <= 1 x 1.5 mm <sup>2</sup> with cable end
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
Flashing frequency	1 Hz
CAD overall width	2.76 in (70 mm)
CAD overall height	5.47 in (139 mm)
CAD overall depth	2.76 in (70 mm)
Terminals description ISO n°1	(COM-1)PW (GND)GROUND
Product weight	0.62 lb(US) (0.28 kg)

### Environment

pollution degree	2
product certifications	CCC CSA C22-2 No 14 GOST UL 508
standards	EN/IEC 60947-5-1
protective treatment	TC
ambient air temperature for storage	-40...158 °F (-40...70 °C)
electrical shock protection class	Class I (on support tube) conforming to IEC 61140 Class II (on base unit) conforming to IEC 61140
IP degree of protection	IP65 (on fixing base XVBZ0.) conforming to IEC 60529 IP66 (on base unit) conforming to IEC 60529
NEMA degree of protection	NEMA 4X (indoor) conforming to UL 508


### Offer Sustainability

WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>	For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


## Illuminated Beacon for BA 15d Bulb or LED

### Dimensions

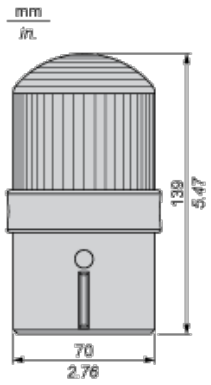

## Illuminated Beacon

### Wiring Diagram



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)