

12TW8 SERIES
CHART 2

M

DRAWING
NUMBER

X 2

10

ISSUE

X 1

X 2

REVISIONS

A C027426
M B S
26 MAY 70

B C027850
M B S
8 SEP 70

C C028519
R E R
2 FEB 71

D PR-4809
K P K
10 MAR 75

E C050565
C J H
16 DEC 81

F C058417
K E W
12 DEC 85

G C061252
J A P
13 MAR 87

H C062939
T S K
24 FEB 88

J C077368
T S M
4 APR 94

FO-30378-2 A

DRAWN

M B S

15 APR 70

CHECK

16 APR 70

CHECK

16 APR 70

RELEASE NO.

PR-4809

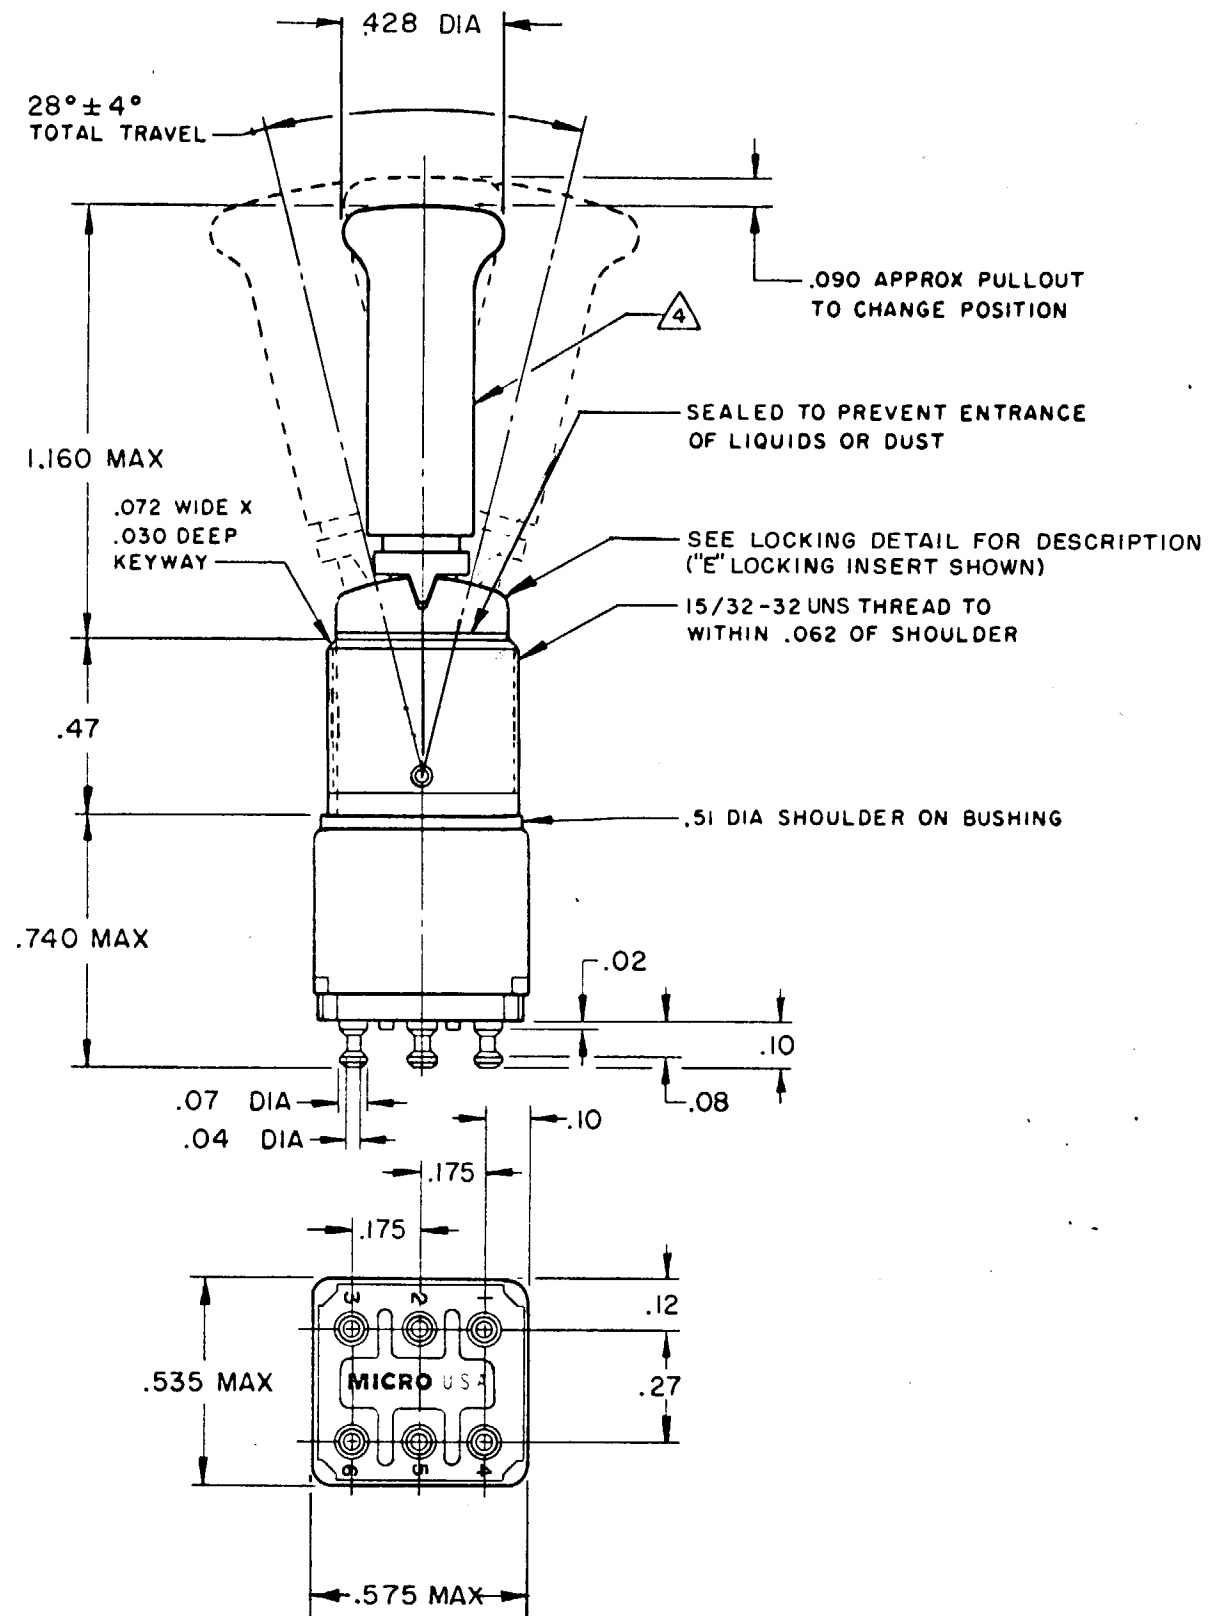
REPLACES

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929










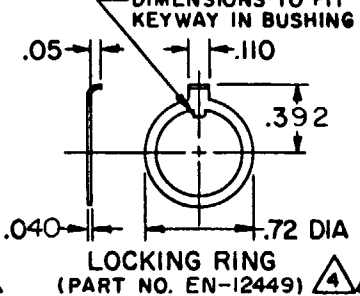


SWITCH-TOGGLE

CATALOG LISTING
12TW8 SERIES
CHART 2

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CAT. LIST.	RECOMMENDED LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT WITH TOGGLE IN			ELECTRICAL DATA
		EXTREME POSITION KEYWAY SIDE 2-1 5-4	CENTER	EXTREME POSITION OPPOSITE KEYWAY 2-3 5-6	
12TW8-1	A,B,D,E,F,G,H,I,K,L,M,N,P	ON	OFF	ON	-L 117- 5A-125 VAC 
12TW8-3	D,F,G	ON	NONE	ON	
12TW8-5	E,F,K,L,M,N	MOM ON	OFF	ON	
12TW8-7	E,L,N,R	MOM ON	OFF	MOM ON	
12TW8-8	F	MOM ON	NONE	ON	
12TW8-2	D,F,G	OFF	NONE	ON	

"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	"G"  LOCKED IN EXTREME POSITION (KEYWAY SIDE)
"H"  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L"  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	"M"  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N"  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)
"P"  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)	 .47 DIA .018 REF .60 DIA LOCKWASHER (PART NO. TS-10013)  DIMENSIONS TO FIT KEYWAY IN BUSHING .05 .110 .392 .040 .72 DIA LOCKING RING (PART NO. EN-12449)  15/32-32 UNS THREAD .078 .56 HEX NUT (PART NO. TL-10632) (2)				
"R" 					

NOTE -
1 - FURNISHED UNASSEMBLED
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE
4 - MATTE FINISH
5 - GOLD PLATED CONTACTS

SCALE 2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.01) ± .030
TWO PLACE (.001) ± .015
THREE PLACE (.000) ± .005
ANGLES ±
WEIGHT .045 LB MAX

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru