

8			7		
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION 2007		
© COPYRIGHT 2007 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER	REV	FIRST USED	POWER UNIT		FEED TYPE
680882-1	E	354500-1	LEADMAKER/BENCH MODEL G		AIR FEED
680882-2	E	852070-1	BENCH MODEL K		AIR FEED

- 1
- RECOMMENDED SPARE PARTS.
- 2
- GREASE LIGHTLY.
- 3
- LUBRICATE DAILY USING NO.20 MACHINE OIL.
- 4
- CHANGE TERMINAL POSITIONER AS REQUIRED TO KEEP TERMINAL ON CENTER OF ANVIL. FASTEN EXTRA TERMINAL POSITIONER TO APPLICATOR.
- 5
- AFTER ASSEMBLY OF APPLICATOR, PROPER SPRING PRESSURE (ITEM 34) CAN BE OBTAINED BY TIGHTENING SET SCREW (ITEM 105) UNTIL CONTACT IS MADE WITH SPACER (ITEM 32) THEN TIGHTEN AN ADDITIONAL 5 1/2 - 6 REVOLUTIONS.)
- 6
- GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE.
- 7
- APPLY LOCTITE TO ITEM 93 AT ASSEMBLY.

TERMINAL NAME: BRUSH CONTACT, TAB-LOCK							
-	62008	AMP TERMINAL - AMP CRIMP SPECS					
-	1217218						
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE	Ø SOLDER	
-	-	A	.062±.002		14	-	
-	-	B	.056±.002		16	-	
-	-	C	.052±.002		18	-	
-	-	D	.048±.002		20	-	
-	-	CRIMP		SIZE	TYPE	RANGE	
-	-						
-	-	WIRE		.140	TAB LOC	20-14	
		INSUL		-	-	-	
WIRE STRIP LENGTH .187-.217		TERM APPL SPEC 114-2078		FEED .480	APPL INSTRUCTIONS A1-B037	SET UP GAGE -	LAYOUT -




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	DWN
A	66		E	ECR-07-006533		27MAR2007	BW

2	2	-	2-24607-7	SCR, FLT, (6-32x.25)	96
2	2	-	4-21006-0	SCR, SET, CUP POINT 8-32 X .250	94
1	1	-	21061-9	SCR, SET, CONE POINT 8-32 X .250	93
2	2	-	2-21000-2	SCR, SKT HD CAP 6-32 X .750	91
2	2	-	23030-4	SCR, SKT HD CAP, S-LOCK, 6-32 X .625	90
4	4	-	2-21000-1	SCR, SKT HD CAP 6-32 X .625	89
1	1	-	2-21002-1	SCR, BTN SKT HD CAP 8-32 X .375	87
10	10	-	3-21002-4	SCR, BTN SKT HD CAP 1/4-20 X .625	86
-	1	-	679532-1	INSERT, GUARD	82
1	1	-	24042-2	VALVE, SHUT-OFF	81
1	-	-	457244-2	GUARD ASSEMBLY	80
1	-	-	692655-1	AIR FEED VALVE ASSY	79
1	-	-	457098-4	AIR FEED ASSEMBLY	78
1	-	-	694427-1	PLATE, APPLICATOR, MOUNTING	77
2	2	-	21017-2	SCREW, DRIVE	76
1	1	-	461264-1	PLATE, IDENTIFICATION	75
-	1	-	462622-3	AIR FEED ASSEMBLY	74
1	1	-	458969-1	SPRING RETAINER, DRAG	73
1	1	-	456987-1	BLOCK, PIVOT	65
1	1	-	457058-1	PIN, PIVOT	64
1	1	-	455164-1	CAP, RAM	59
1	1	-	461853-1	HOUSING, MODIFIED	58
1	1	-	25745-1	RING, SPLIT	56
1	1	-	240624-1	PIN, FEED FINGER	55
1	1	-	691499-1	SPRING-FEED FINGER	54
1	1	-	1-690584-3	FINGER,FEED	53
1	1	-	457057-1	PIVOT ARM	52
1	1	-	3-21002-5	SCR, BTN SKT HD CAP 1/4-20 X .750	49
1	1	-	690191-1	PLUG,NYLON	45
1	1	-	691533-1	RAM, SPECIAL	44
1	1	-	690125-1	SHIM SUB-ASSY	43
1	1	-	690124-4	WASHER, RAM (.135)	42
1	1	-	690223-2	SPACER, INS.	38
1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
1	1	-	22480-5	WASHER, WAVE SPRING	36
1	1	-	690212-1	POST, RAM	35
1	1	-	3-23846-5	SPRING, DIE	34
1	1	-	690573-1	SPACER, SPRING	32
1	1	-	690582-1	PIN, HINGE	28
1	1	-	455946-1	PLATE, BASE	26
1	1	-	462033-1	HINGE BAR	25
1	1	-	690571-1	STABILIZER	24
1	1	-	460469-1	BLOCK, SPRING PRESS	23
1	1	-	7-22282-5	SPRING, COMPRESSION	22
1	1	-	458960-3	DRAG	20
1	1	-	462031-1	GUIDE, REAR STRIP	19
1	1	-	462032-1	GUIDE, FRONT STRIP	18
4	4	-	461906-1	SCREW, STRIP GUIDE ADJUSTING	17
1	1	-	2-22287-3	SPRING, EXTENSION	16
1	1	-	461905-1	STOP, STRIP GUIDE	15
3	3	-	810417-1	STOP, STRIP GUIDE	14
1	1	-	691525-6	PLATE, REAR SHEAR	11
1	1	-	455838-1	ANVIL INSERT	10
1	1	-	690569-5	PLATE, SHEAR, FRONT	9
1	1	-	455945-1	ANVIL, REVERSIBLE	8
1	1	-	691532-6	SHEAR BLADE MINI APPLICATOR	7
1	1	-	691522-1	PLATE, ANVIL RETAINING	5
1	1	-	691531-5	WIRE CRIMPER, REVERSIBLE PREMIUM	1
-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE KEPT IN CONFIDENTIALITY AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY UNAUTHORIZED REPRODUCTION OR TRANSMISSION OF THIS DRAWING IS PROHIBITED. TYCO ELECTRONICS CORPORATION SHALL BE CONTACTED FOR THE LATEST REVISION.		DWN RD WEAVER	07FEB2007	tyco Tyco Electronics Harrisburg, PA 17105-3608			
EGR T. ELBIN		07FEB2007	NAME				
APVD T. ELBIN		07FEB2007	PRODUCT SPEC				
DIMENSIONS: IN		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC			
		0 PLC ±	1 PLC ±	2 PLC ±	3 PLC ±		
		4 PLC ±	5 PLC ±	6 PLC ±	7 PLC ±		
MATERIAL -		FINISH -		WEIGHT -	CUSTOMER DRAWING		
				SIZE A	CAGE CODE 00779		
				DRAWING NO C=680882	RESTRICTED TO -		
				SCALE 1:1	SHEET 1 OF 2		
				REV E			

1	1	-	1976348-1	L-BRACKET, COUNTER	137
1	1	-	3-21000-6	SCR, SKT HD CAP 10-32 X .625	136
2	2	-	18028-2	WASHER, FLAT, REG M4	134
1	1	-	1804300-1	ASSEMBLY,APPLICATOR COUNTER	133
2	2	-	994991-5	SCREW, OVL HD, M4X12	132
1	1	-	1976349-1	BRACKET, COUNTER	130
2	2	-	5-354779-7	PIN, WIRE DISC (MARKED)	129
2	2	-	5-354779-0	PIN, WIRE DISC (MARKED)	128
2	2	-	4-354779-5	PIN, WIRE DISC (MARKED)	127
2	2	-	3-354779-1	PIN, WIRE DISC (MARKED)	126
1	1	-	986950-1	WASHER, FLAT PRECISION	125
1	1	-	21029-5	PIN, SLOTTED SPRING .188 X .750	122
1	1	-	3-21028-2	PIN, SLOTTED SPRING .094 X .250	121
1	1	-	21029-9	PIN, SLOTTED SPRING .188 X 1.000	120
2	2	-	21030-7	PIN, DOWEL .1250 X 1.250	119
1	1	-	21018-7	NUT, HEX, REG 10-32	115
3	3	-	21024-4	WASHER, SPRG LOCK, REG NO 8	114
2	2	-	21024-5	WASHER, SPRG LOCK, REG NO 10	112
4	4	-	21024-3	WASHER, SPRG LOCK, REG NO 6	111
5	5	-	21899-1	WASHER, FLAT	110
1	1	-	1-22202-7	NUT, HEX, JAM 5/16-24/UNF	109
4	4	-	21018-6	NUT, HEX, REG 8-32	108
1	1	-	1-21986-2	RING, RETAIN, EXTERN, 3/16 E-RING	107
2	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	106
1	1	-	8-21007-5	SCR, SET, CUP POINT 5/16-24 X .750	105
5	5	-	2-21000-6	SCR, SKT HD CAP 8-32 X .375	103
1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	102
1	1	-	1-21002-4	SCR, BTN SKT HD CAP 4-40 X .375	101
3	3	-	3-21000-9	SCR, SKT HD CAP 10-32 X 1.000	100
6	6	-	3-21000-8	SCR, SKT HD CAP 10-32 X .875	99

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

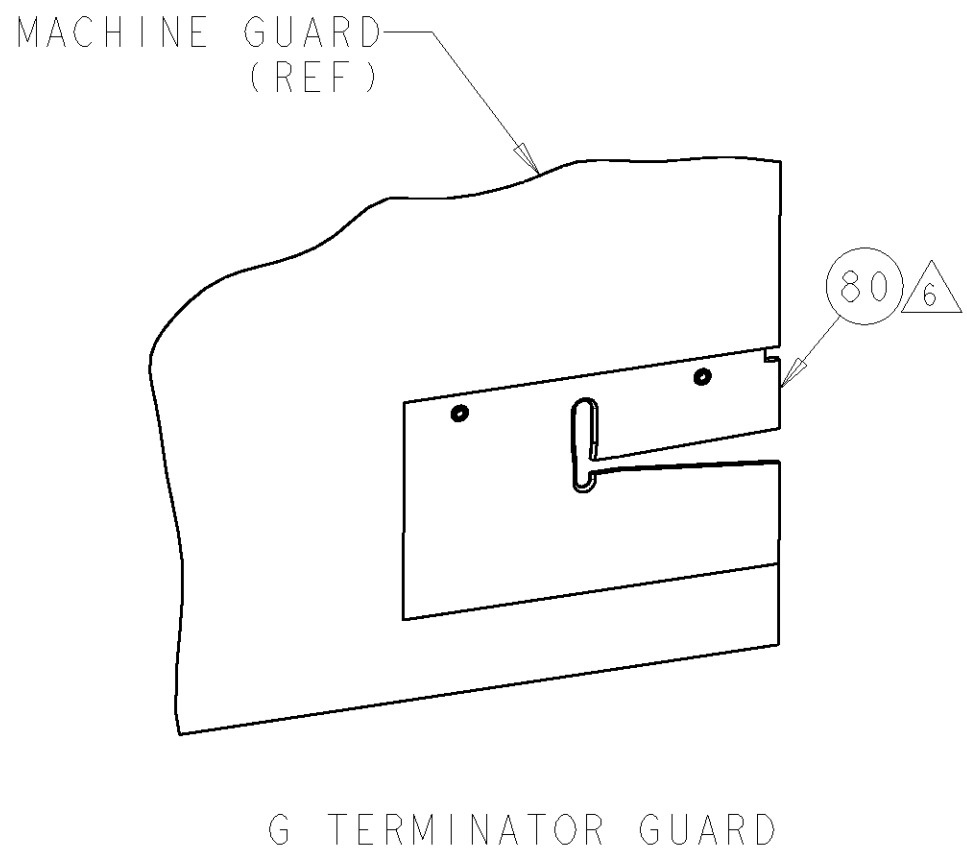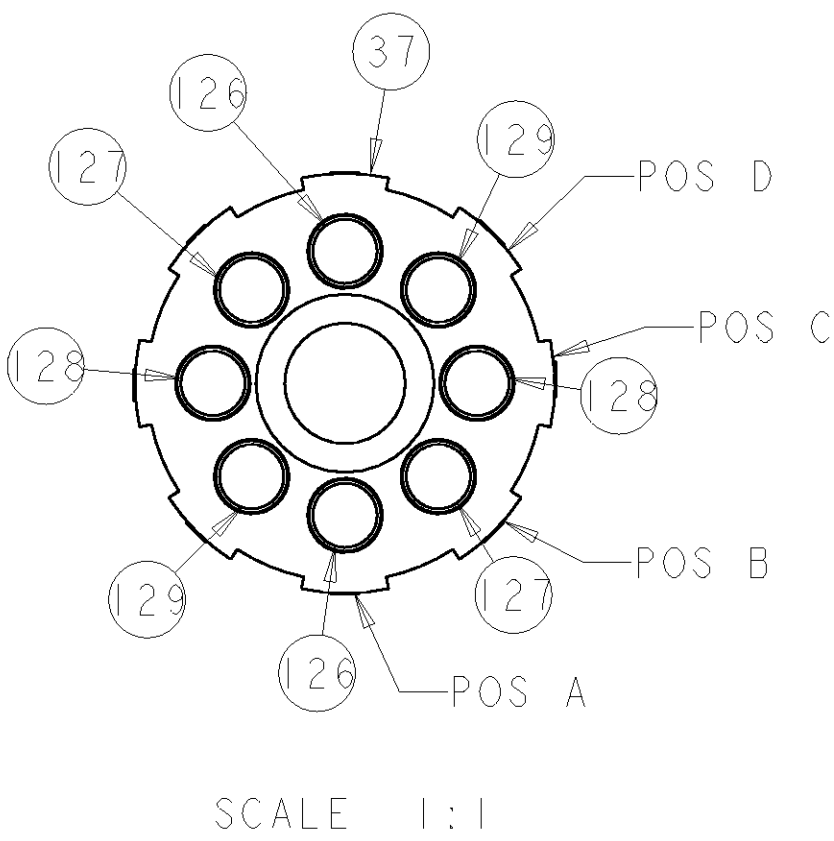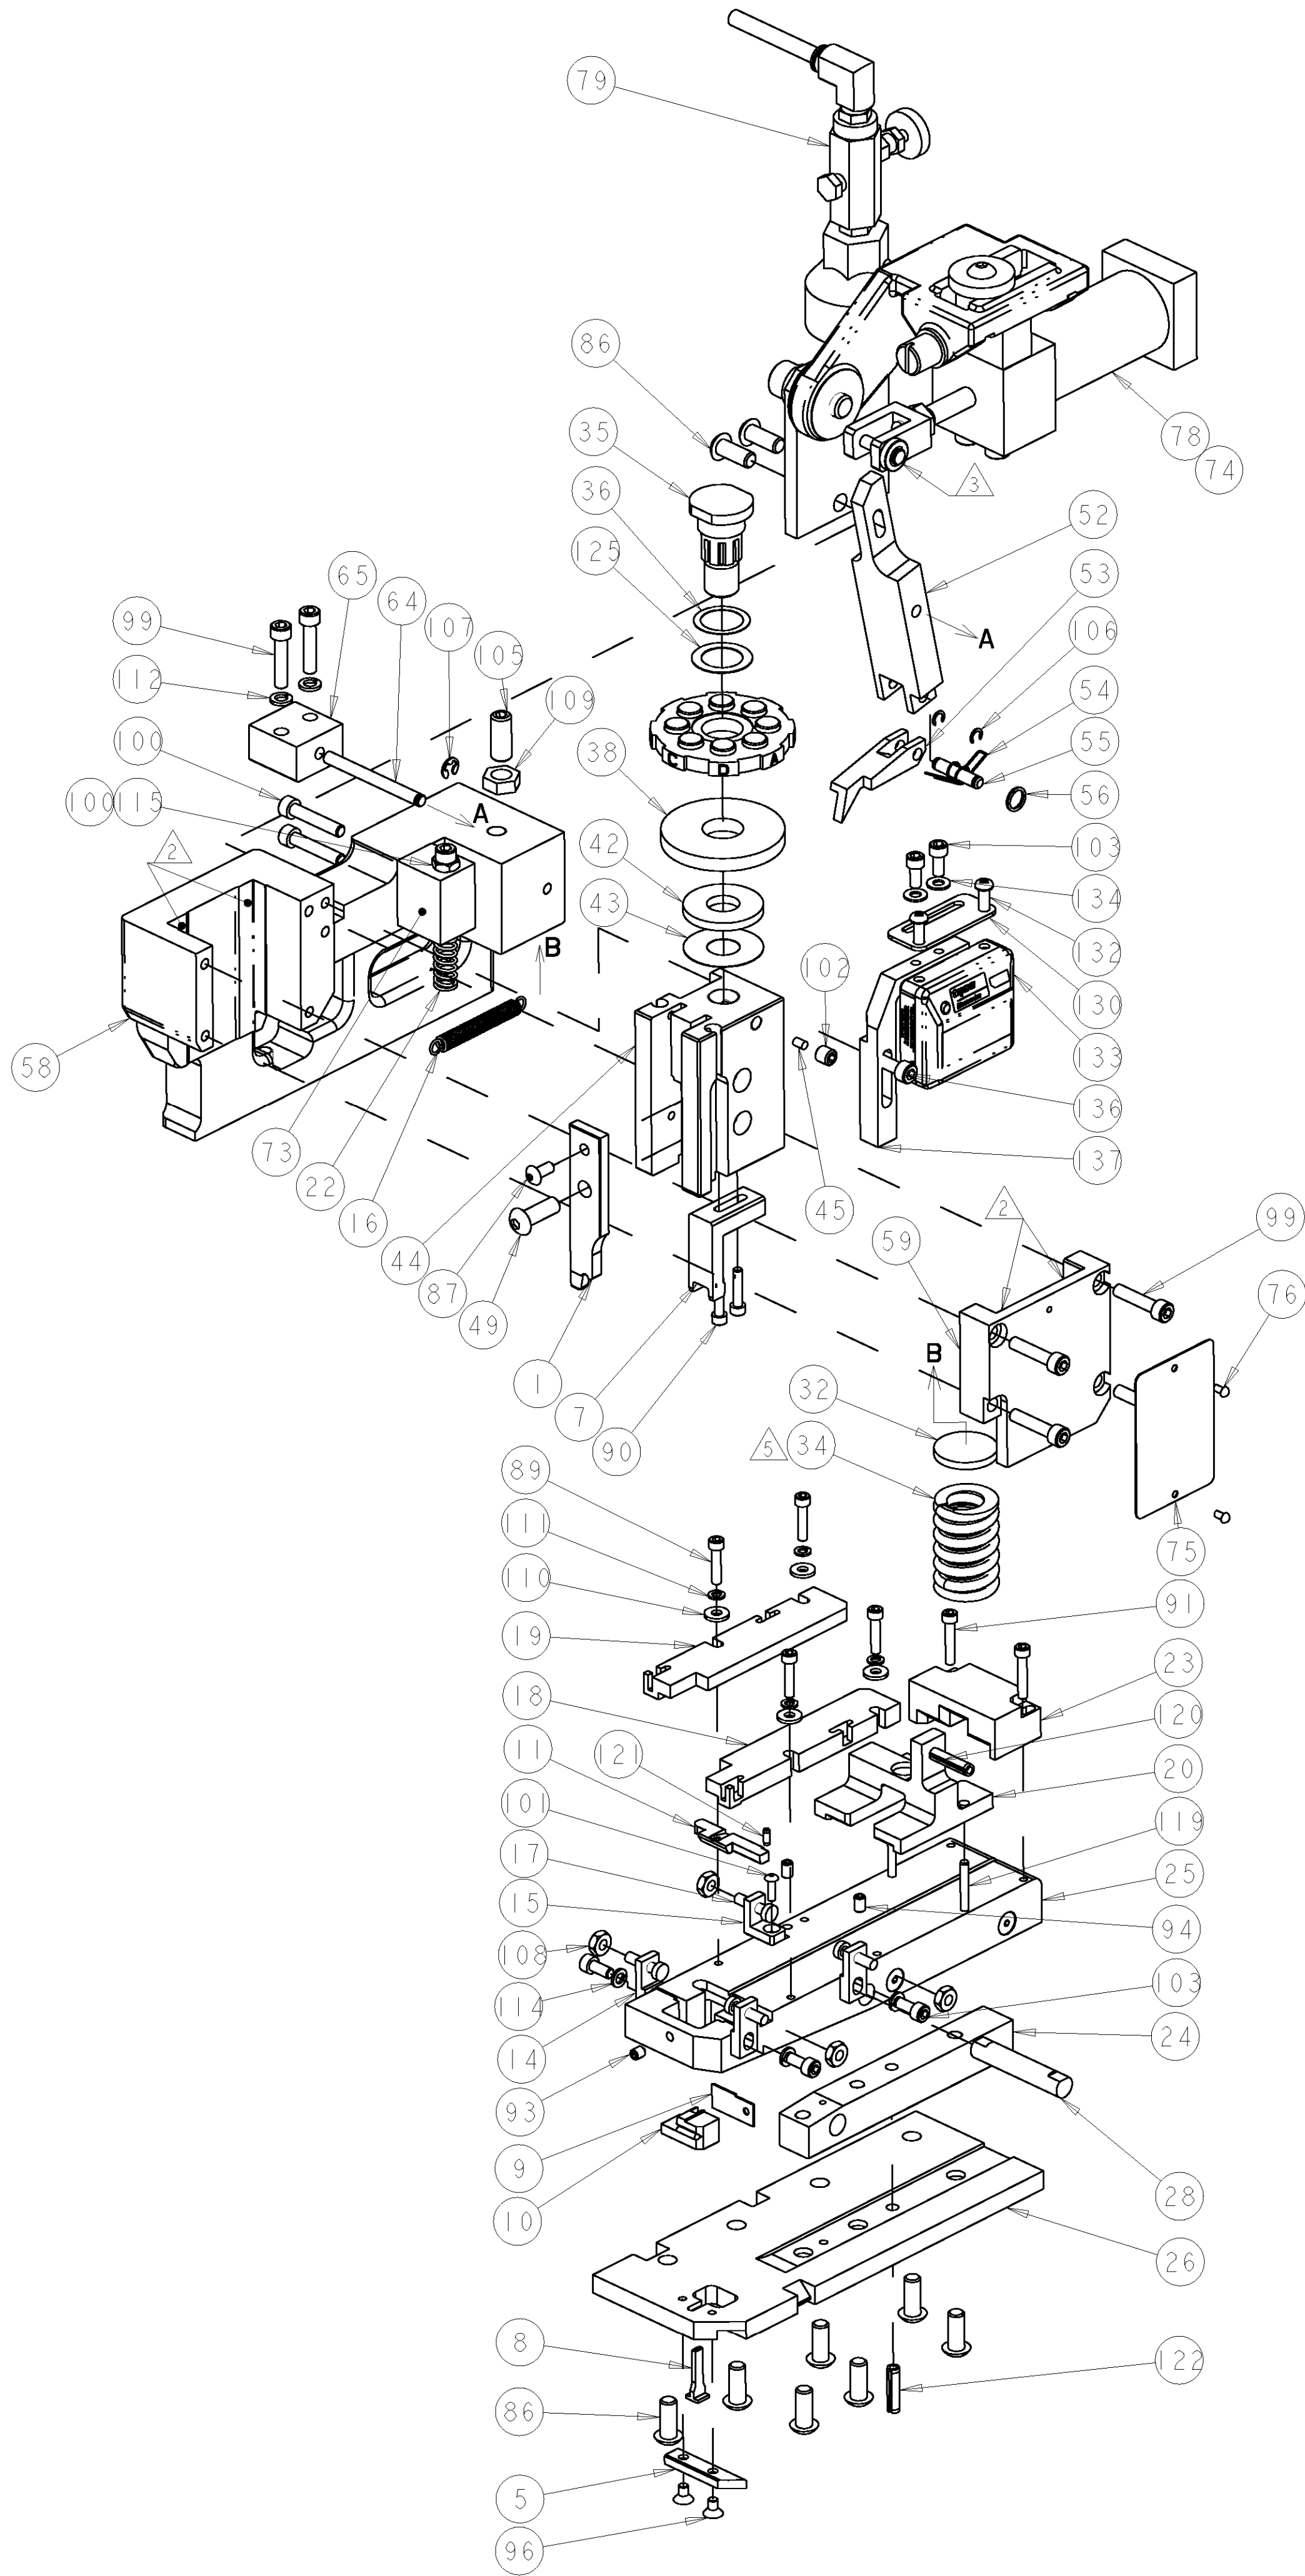

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED. IT IS TO BE RETURNED TO TYCO ELECTRONICS CORPORATION WHEN NO LONGER REQUIRED. IT IS TO BE DESTROYED WHEN NO LONGER REQUIRED.				DWN B. WEAVER 07FEB2007	Tyco Electronics Harrisburg, PA 17105-3608	
ECHO T. ELBIN 07FEB2007				APVD T. ELBIN 07FEB2007	NAME END FEED HINGE BAR APPLICATOR	
DIMENSIONS: IN				PRODUCT SPEC	SIZE A100779	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±				APPLICATION SPEC	CAGE CODE C=680882	
MATERIAL -				WEIGHT -	RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 11:20	SHEET 2 OF 2	REV E

CUSTOMER VIEWABLE ASSEMBLY

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru