
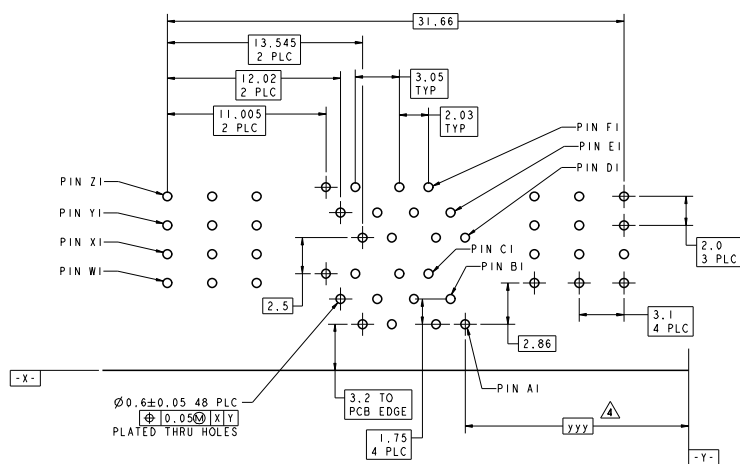
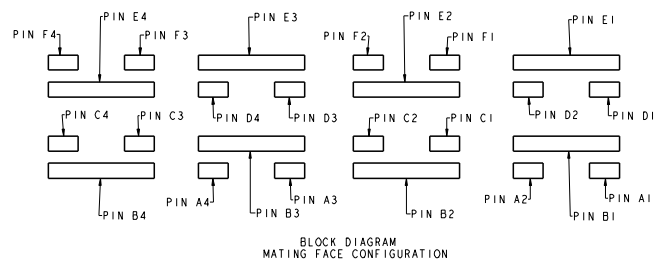
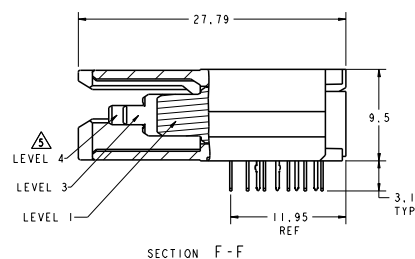
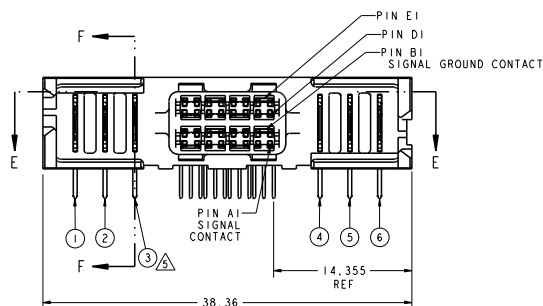


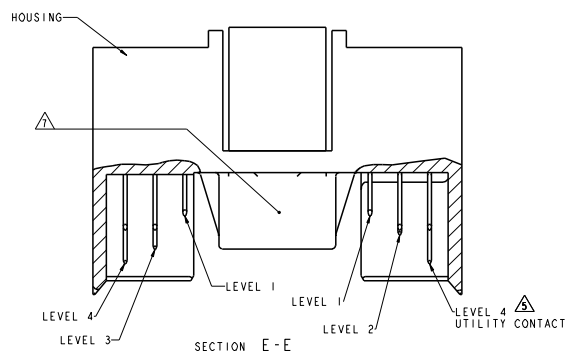

RECOMMENDED PC BOARD FOOTPRINT
COMPONENT SIDE SHOWN
SCALE 6:1

△ HOUSINGS: POLYESTER, UL 94V-0 RATED, NATURAL
SIGNAL AND SIGNAL GROUND CONTACTS: COPPER ALLOY
UTILITY CONTACTS: PHOSPHOR BRONZE

▲ UTILITY CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.
SIGNAL AND SIGNAL GROUND CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.

3. ROWS A, C, D, AND F ARE SIGNAL CONTACTS. ROWS B AND E ARE SIGNAL GROUND CONTACTS.

△ 4 DIMENSIONS PER CUSTOMER BOARD LAYOUT.

SEE UTILITY CONTACT SEQUENCE TABLE FOR LOCATION AND LEVEL/LENGTH OF UTILITY CONTACTS FOR EACH PRODUCT PART NUMBER. UTILITY LEVEL 1 CAN BE USED FOR SENSING, UTILITY LEVELS 2, 3, AND 4 CAN BE USED FOR POWER, GROUND, OR ESD. SEQUENCING SHOWN IN SECTION E-E SHOWS THREE LEVELS FOR COMPARISON. UTILITY LEVEL 2 EQUALS THE SIGNAL GROUND CONTACT LEVEL. SIGNAL LEVEL IS BETWEEN UTILITY LEVELS 1 AND 2.

6. BLOCK DIAGRAM AND CONTACT IDENTIFICATION APPLY TO COPLANAR NON-INVERTED APPLICATION ONLY. CONTACT IDENTIFICATION REVERSES FOR INVERTED APPLICATIONS, I.E. COPLANAR OR MID-BOARD INVERTED.

7 COMPANY LOGO IN APPROXIMATE AREA SHOWN.

LOC	DIST	REVISONS				
GP	00	#	LTN	DESCRIPTION	DATE	OWN
			B	REDRAWN PER ECO-10-012356	12NOV2010	CJV E

UTILITY CONTACT SEQUENCE TABLE						
UTILITY CONTACT LEVEL 1, 2, 3, OR 4						
1	2	4	4	2	2	6367551-1
4	3	2	2	3	4	6367551-1
①	②	③	④	⑤	⑥	PART NUMBER
UTILITY CONTACT LOCATION						

UTILITY CONTACT LOCATION				NUMBER	
DATE OF INFORMATION	DATE	 Tyco Electronics Harrisburg, PA 17105-3608			
12/11/2010	12/11/2010				
CDR. VALENTINO CDR. BRILANT ATSD PRODUCT SPEC 108-1885 APPROVED SPEC 114-1268			NAME Z-DOK, ADAPTER BOARD CONNECTOR ASSEMBLY, 8 SIGNAL DIODE PAIR, 3 UTILITY CONTACTS PER SIDE		
108-1885	108-1885	SIZE	CASE CODE	SHAWING NO.	RESTRICTED
114-1268	114-1268				
REIGHT	REIGHT	A1	00779	C-6367551	
CUSTOMER DRAWING	CUSTOMER DRAWING	SCALE	SHEET	OF	REV

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru