

SNAP-IN BEZELS FOR DMS-20PC/30PC/40PC RED LED METERS


DATEL part numbers 5252-01160-0 (for DMS-30PC and DMS-40PC red LED meters) and 5252-01161-0 (for DMS-20PC red LED meters) can be used when DMS meters are mounted on a pc-board which is situated behind a panel. Both bezels are made of black ABS plastic and easily snap into appropriately-sized cutouts (see chart for cutout dimensions) in metal panels whose thickness is between 0.040"(1.0mm) and 0.125"(3.2mm).

Both bezels come with a snap-in, 0.030"(0.8mm) thick, red acrylic lens which provides excellent on/off contrast. For optimum digit clarity, the spacing between the meter's front surface and the lens should be less than 0.200"(5.1mm). See application Note 16 for more information on behind-the-panel mounting.




| Bezel Dimensions | A | B | C | D |
|-------------------------------|-----------------|-----------------|-----------------|-----------------|
| 5252-01161-0 DMS-20PC | 1.343 (34.1) | 1.906 (48.4) | 1.375 (34.9) | 0.812 (20.6) |
| 5252-01160-0 DMS-30PC/40PC | 1.343 (34.1) | 2.531 (64.3) | 2.0 (50.8) | 0.812 (20.6) |
| Cutout Dimensions | Height | | Width | |
| 5252-01161-0 DMS-20PC | 1.156 (29.4) | | 1.750 (44.5) | |
| 5252-01160-0 DMS-30PC/40PC | 1.156 (29.4) | | 2.375 (60.3) | |
| Filter Dimensions | Height | | Width | |
| 5252-01161-0 DMS-20PC | 0.875 (22.2) | | 1.437 (36.5) | |
| 252-01160-0 DMS-30PC/40PC | 0.875 (22.2) | | 2.087 (53.0) | |

Dimensions: in. (mm) Tolerances: ± 0.008 (± 0.2)
Filter Material is 0.030" (0.8) thick

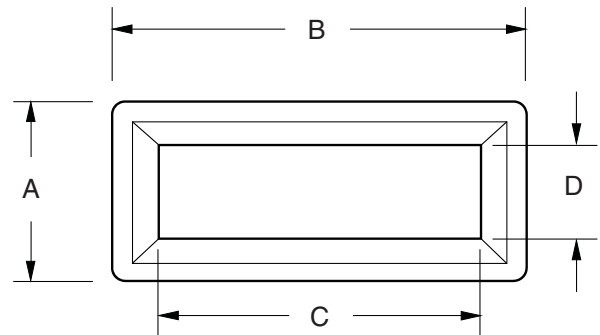

BEZEL AND FILTER INSTALLATION

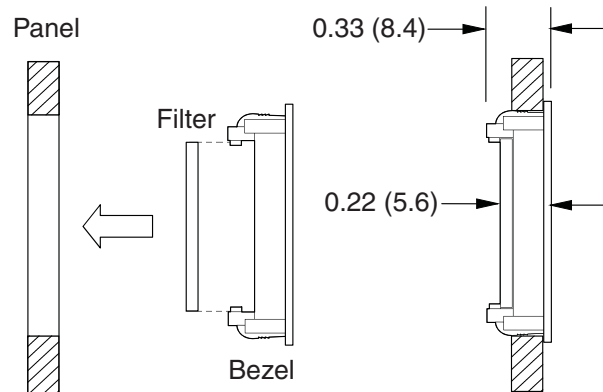


RETAINING CLIPS FOR DMS-20 AND DMS-30/40

Part numbers 5252-01126-0 (for all DMS-30/40 meters) and 5252-01127-0 (for all DMS-20 meters) metal retaining clips can be used as spares for damaged or lost clips and for securing blank cases to panels.

| Clip Dimensions | A | B |
|-------------------------------|----------------|----------------|
| 5252-01127-0 DMS-20PC | 1.71 (43.4) | 1.21 (30.7) |
| 5252-01126-0 DMS-30PC/40PC | 2.50 (63.5) | 1.25 (31.8) |

Dimensions: in. (mm) Tolerances: ±0.02 (±0.5)

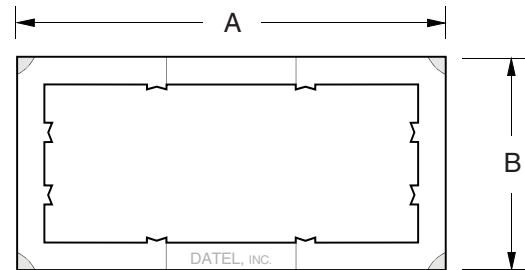


RED CASES FOR DMS-20PC/30PC/40PC APPLICATIONS

DATEL part numbers 5252-01145-0 (DMS-30/40PC size) and 5252-01130-0 (DMS-20PC size) are the same red plastic cases used in DMS-30/40 and DMS-20PC red LED display meters. These "blank" cases can be utilized to cover unused cutouts in multiple-meter applications. They can also be used to achieve a uniform appearance in applications which combine a red LED DMS meter with a user-supplied red LED display. Both cases can be secured to the panel in the same manner as their meter counterparts, that is, with either 5252-01120-0 (for DMS-30/40's) and 5252-01127-0 (for DMS-20's) retaining clips, or with DMS-BZL1 (for DMS-30/40's) and DMS-BZL3 (for DMS-20's) bezel assemblies.

Both cases are made from 0.040" (1.0mm) thick red polycarbonate plastic and are supplied with a removable protective film on their front surface which reduces scratching during handling and installation.

| Case Dimensions | A | B | C | D | E | F |
|-------------------------------|-----------------|----------------|----------------|-----------------|-----------------|-----------------|
| 5252-01130-0 DMS-20PC | 0.475 (12.1) | 0.040 (1.0) | 0.025 (0.6) | 0.800 (20.3) | 0.880 (22.4) | 1.380 (35.1) |
| 5252-01145-0 DMS-30PC/40PC | 0.560 (14.1) | 0.040 (1.0) | 0.030 (0.8) | 0.850 (21.6) | 0.925 (23.5) | 2.165 (55.0) |

Dimensions: in. (mm) Tolerances: ±0.008 (±0.2)

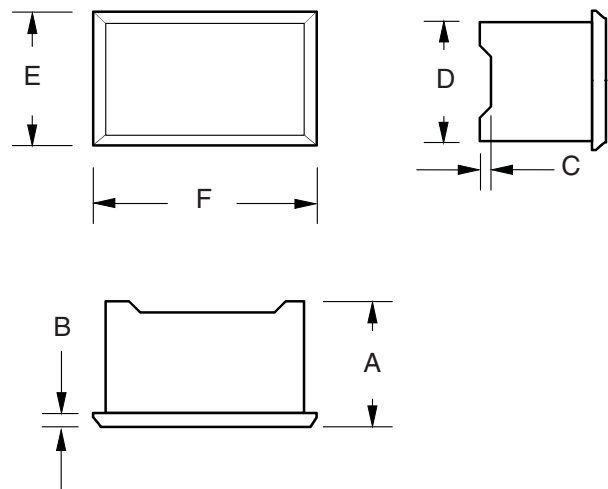


Panel Cutouts: See the Mechanical Specifications section of the DMS-20PC or DMS-30PC Series product data sheets for detailed panel cutout and panel mounting dimensions.

CUTOUT ADAPTER FOR DMS-20/30/40 METERS


DATEL offers two 0.020"(0.5mm) lexan adapter plates which, when used with DMS-BZL1 or DMS-BZL3 bezel assemblies, can compensate for irregular, less precise panel cutouts. These adapter plates can also be used to compensate for slightly larger cutouts when designing-in DATEL meters as alternate sources. 4652-01101-0 fits all DMS-30/40 meters and 4652-01100-0 fits all DMS-20 meters. As shown in the illustrations, the adapter plate is first placed around the meter's case and then the bezel assembly is installed in the normal manner using its factory-supplied hardware.

| Adapter Dimensions | A | B | C | D |
|-------------------------------|-----------------|-----------------|-----------------|-----------------|
| 4652-01100-0 DMS-20PC | 1.290 (32.8) | 1.315 (33.4) | 0.815 (20.7) | 1.850 (47.0) |
| 4652-01101-0 DMS-30PC/40PC | 1.290 (32.8) | 2.110 (53.6) | 0.870 (22.1) | 2.570 (65.3) |

Dimensions: in. (mm) Tolerances: ±0.008 (±0.2)
 Adapter Plate is 0.020 (0.5) thick

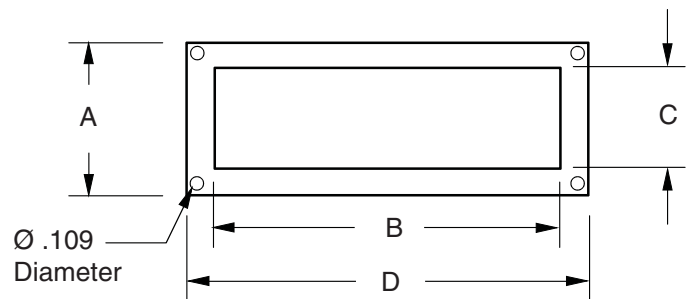

ADAPTER PLATE INSTALLATION

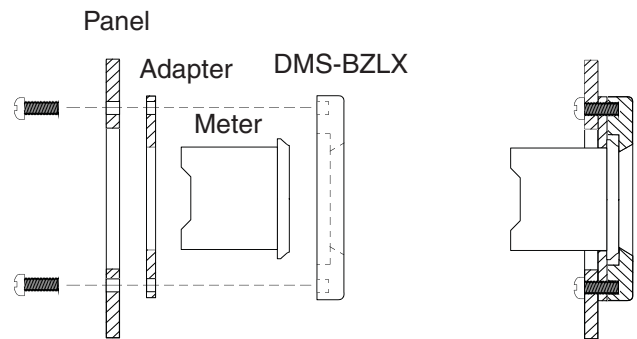

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru