

# Series 51

16mm IP65 5A 250VAC



Choose one component from each of the colored sections to assemble a complete switch.  
For other options or further information please contact EAO Switch directly.

## Product Profile

The Series 51 is a high quality switch range that includes pushbuttons, indicators, illuminated selector switches and keylock switches. It is possible to choose up to 4NO/4NC snap-action switching elements per switch. Low level switching elements are also available.

Technical drawings see pages 56-57

- IP65 Protection
- Switch Rating, 5A, 250VAC
- Raised Mounting into 16mm cut out
- Illumination using midget-grooved T-1½ lamps or single chip LED's
- All standard lenses are transparent with translucent white diffusers, and are available in different colors
- For keylock switches 2 key systems and 145 different key codes are available
- QC versions also available

## Indicator



Indicator bodies, raised in round, square and rectangular, black plastic, 16mm mounting, solder terminals

| Image | Part No.   | Size      |
|-------|------------|-----------|
| 1     | 51-040.005 | 18 x 24mm |
| 2     | 51-050.005 | 18 x 18mm |
| 3     | 51-030.005 | 18mm Ø    |
|       |            |           |
|       |            |           |
|       |            |           |
|       |            |           |
|       |            |           |
|       |            |           |

For complete switch also order **A**

## Illuminated pushbutton



Illuminated pushbutton, snap-action, raised, rectangular, black plastic, 16mm mounting, solder terminals, gold over silver contacts

| Part No.   | Action     | Contact type | Size      |
|------------|------------|--------------|-----------|
| 51-121.025 | Momentary  | 1NO/1NC      | 18 x 24mm |
| 51-122.025 | Momentary  | 2NO/2NC      | 18 x 24mm |
| 51-261.025 | Maintained | 1NO/1NC      | 18 x 24mm |
| 51-262.025 | Maintained | 2NO/2NC      | 18 x 24mm |
|            |            |              |           |
|            |            |              |           |
|            |            |              |           |
|            |            |              |           |
|            |            |              |           |

For complete switch also order **A**

## Illuminated pushbutton



Illuminated pushbutton, snap-action, raised, square, black plastic, 16mm mounting, solder terminals, gold over silver contacts

| Part No.   | Action     | Contact type | Size      |
|------------|------------|--------------|-----------|
| 51-151.025 | Momentary  | 1NO/1NC      | 18 x 18mm |
| 51-152.025 | Momentary  | 2NO/2NC      | 18 x 18mm |
| 51-281.025 | Maintained | 1NO/1NC      | 18 x 18mm |
| 51-282.025 | Maintained | 2NO/2NC      | 18 x 18mm |

For complete switch also order **A**

## Keylock switch




Keylock switch, 2 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts

| Drawing | Part No.    | Contact type | Key rem. |
|---------|-------------|--------------|----------|
| 1       | 51-135.025D | 1NO/1NC      | A+C      |
| 1       | 51-136.025D | 2NO/2NC      | A+C      |
| 1       | 51-235.025D | 1NO/1NC      | A        |
| 1       | 51-335.025D | 1NO/1NC      | C        |
| 2       | 51-141.025D | 1NO/1NC      | A        |

For complete switch also order **A**


Choose one component from each of the colored sections to assemble a complete switch.  
For other options or further information please contact EAO Switch directly.




## Keylock switch




Keylock switch, 2 position, raised, snap-action, square, black plastic, 18 x 18mm, solder terminals, gold over silver contacts



Keylock switch, 2 position, raised, snap-action, rectangular, black plastic, 18 x 24mm, solder terminals, gold over silver contacts



Keylock switch, 3 position, raised, snap-action, rectangular, black plastic, 18 x 24mm, solder terminals, gold over silver contacts




| Drawing | Part No.    | Contact type | Key rem. | Drawing | Part No.    | Contact type | Key rem. | Drawing | Part No.    | Contact type | Key rem.  |
|---------|-------------|--------------|----------|---------|-------------|--------------|----------|---------|-------------|--------------|-----------|
| 2       | 51-145.025D | 1NO/1NC      | A        | 1       | 51-195.025D | 1NO/1NC      | A+C      | 3       | 51-361.022D | 2x 1NO/1NC   | A         |
| 2       | 51-146.025D | 2NO/2NC      | A        | 1       | 51-196.025D | 2NO/2NC      | A+C      | 3       | 51-362.022D | 2x 2NO/2NC   | C + A + B |
| 1       | 51-155.025D | 1NO/1NC      | A+C      | 1       | 51-295.025D | 1NO/1NC      | A        | 4       | 51-364.022D | 2x 1NO/1NC   | A         |
| 1       | 51-255.025D | 1NO/1NC      | A        | 1       | 51-296.025D | 2NO/2NC      | A        |         |             |              |           |
| 1       | 51-355.025D | 1NO/1NC      | C        | 1       | 51-395.025D | 1NO/1NC      | C        |         |             |              |           |
|         |             |              |          | 1       | 51-396.025D | 2NO/2NC      | C        |         |             |              |           |
|         |             |              |          | 2       | 51-495.025D | 1NO/1NC      | A        |         |             |              |           |
|         |             |              |          | 2       | 51-496.025D | 2NO/2NC      | A        |         |             |              |           |
|         |             |              |          |         |             |              |          |         |             |              |           |
|         |             |              |          |         |             |              |          |         |             |              |           |
|         |             |              |          |         |             |              |          |         |             |              |           |
|         |             |              |          |         |             |              |          |         |             |              |           |


## Selector switch



Selector switch, 2 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts



Selector switch, 3 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts



## LED



LED, T-1 3/4 MG, single chip, 12 Volt and 28 Volt.  
Also available in 6 Volt, 24 Volt and 48 Volt

| Drawing | Part No.   | Contact type | Drawing | Part No.    | Contact type | Color  | Part No.     | Voltage          |
|---------|------------|--------------|---------|-------------|--------------|--------|--------------|------------------|
| 5       | 52-131.025 | 1NO/1NC      | 7       | 52-571.022A | 2x 1NO/1NC   | Red    | 10-2J09.1062 | 12VAC/DC, 7/14mA |
| 5       | 52-132.025 | 2NO/2NC      | 8       | 52-572.022A | 2x 1NO/1NC   | Yellow | 10-2J09.1064 | 12VAC/DC, 7/14mA |
| 6       | 52-271.025 | 1NO/1NC      |         |             |              | Green  | 10-2J09.1065 | 12VAC/DC, 4/7mA  |
| 6       | 52-272.025 | 2NO/2NC      |         |             |              | Blue   | 10-2J09.1066 | 12VAC/DC, 7/14mA |
|         |            |              |         |             |              | White  | 10-2J09.1069 | 12VAC/DC, 7/14mA |
|         |            |              |         |             |              | Red    | 10-2J13.1062 | 28VAC/DC, 7/14mA |
|         |            |              |         |             |              | Yellow | 10-2J13.1064 | 28VAC/DC, 7/14mA |
|         |            |              |         |             |              | Green  | 10-2J13.1065 | 28VAC/DC, 4/7mA  |
|         |            |              |         |             |              | Blue   | 10-2J13.1066 | 28VAC/DC, 7/14mA |
|         |            |              |         |             |              | White  | 10-2J13.1069 | 28VAC/DC, 7/14mA |

For complete switch also order A

For complete switch also order A



Choose one component from each of the colored sections to assemble a complete switch.  
For other options or further information please contact EAO Switch directly.

A Accessories



Lens, opaque for rectangular pushbutton actuators, not for illumination

| Color   | Part No. | Size      |
|---------|----------|-----------|
| ● Black | 51-901.0 | 18 x 24mm |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |



Lens, front transparent with white diffuser for rectangular indicator and pushbutton actuators

| Color    | Part No. | Size      |
|----------|----------|-----------|
| ● Red    | 51-903.2 | 18 x 24mm |
| ● Yellow | 51-903.4 | 18 x 24mm |
| ● Green  | 51-903.5 | 18 x 24mm |
| ● Blue   | 51-903.6 | 18 x 24mm |
| ○ Clear  | 51-903.7 | 18 x 24mm |
|          |          |           |
|          |          |           |
|          |          |           |
|          |          |           |
|          |          |           |



Lens, opaque for square pushbutton actuators, not for illumination

| Color   | Part No. | Size      |
|---------|----------|-----------|
| ● Black | 51-951.0 | 18 x 18mm |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |
|         |          |           |

A Accessories



Lens, front transparent with white diffuser for square indicator and pushbutton actuators

| Color    | Part No. | Size      |
|----------|----------|-----------|
| ● Red    | 51-953.2 | 18 x 18mm |
| ● Yellow | 51-953.4 | 18 x 18mm |
| ● Green  | 51-953.5 | 18 x 18mm |
| ● Blue   | 51-953.6 | 18 x 18mm |
| ○ Clear  | 51-953.7 | 18 x 18mm |
|          |          |           |
|          |          |           |
|          |          |           |
|          |          |           |
|          |          |           |



Lens, opaque for round pushbutton actuators, not for illumination

| Color   | Part No. | Size   |
|---------|----------|--------|
| ● Black | 51-931.0 | 18mm Ø |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |
|         |          |        |



Lens, front transparent with white diffuser for round indicator and pushbutton actuators

| Color    | Part No. | Size   |
|----------|----------|--------|
| ● Red    | 51-933.2 | 18mm Ø |
| ● Yellow | 51-933.4 | 18mm Ø |
| ● Green  | 51-933.5 | 18mm Ø |
| ● Blue   | 51-933.6 | 18mm Ø |
| ○ Clear  | 51-933.7 | 18mm Ø |
|          |          |        |
|          |          |        |
|          |          |        |
|          |          |        |
|          |          |        |

**Choose one component from each of the colored sections to assemble a complete switch.**  
For other options or further information please contact EAO Switch directly.



## A Accessories



| Color  | Part No.  | Window      | Image                               | Part No. | Size      | Image | Part No. | Size      |
|--------|-----------|-------------|-------------------------------------|----------|-----------|-------|----------|-----------|
| Black  | 52-928.0  | Opaque      |                                     | 51-925   | 18 x 24mm |       | 51-947.0 | 18 x 24mm |
| Red    | 52-928.20 | Transparent |                                     | 51-920   | 18 x 18mm |       | 51-948.0 | 18 x 18mm |
| Yellow | 52-928.40 | Transparent |                                     |          |           |       | 51-949.0 | 18mm Ø    |
| Green  | 52-928.50 | Transparent |                                     |          |           |       |          |           |
| Blue   | 52-928.60 | Transparent |                                     |          |           |       |          |           |
|        |           |             |                                     |          |           |       |          |           |
|        |           |             |                                     |          |           |       |          |           |
|        |           |             |                                     |          |           |       |          |           |
|        |           |             |                                     |          |           |       |          |           |
|        |           |             |                                     |          |           |       |          |           |
|        |           |             | *Can be used with round pushbuttons |          |           |       |          |           |


## A Accessories



| Image | Part No.  | Product description |
|-------|-----------|---------------------|
| 1     | 01-907    | Mounting tool       |
| 2     | 02-905    | Lens remover        |
| 3     | 61-9740.0 | LED remover         |
| 4     | 02-906    | Lamp remover        |
|       |           |                     |
|       |           |                     |
|       |           |                     |
|       |           |                     |
|       |           |                     |


51 Indicator

Raised

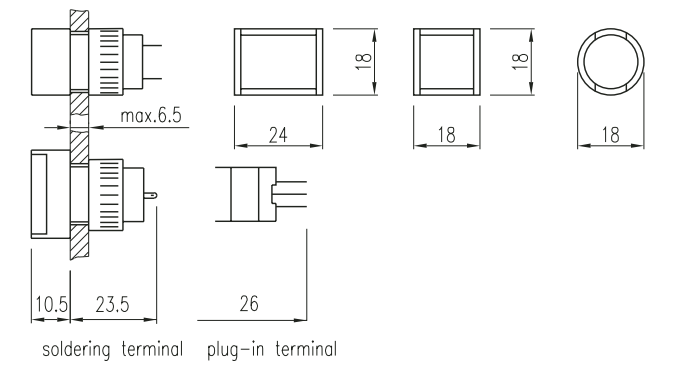


51 Keylock

Raised, 2-Position, Round, Square, Rectangular

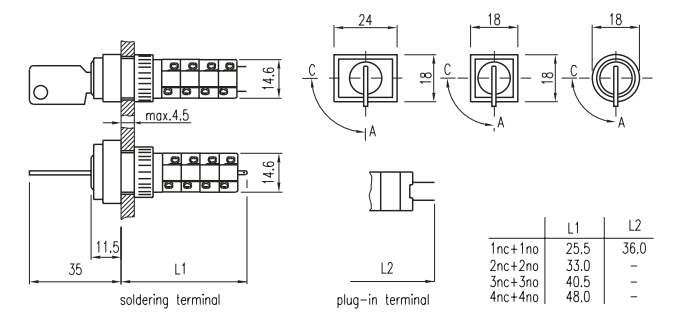


52 Selector

Raised, 3-Position, Round

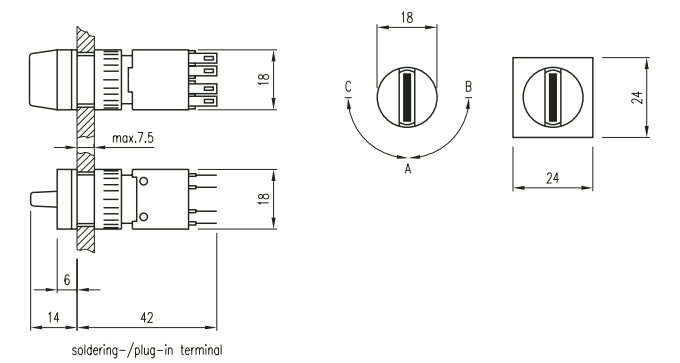


51 Pushbutton

Raised, Round, Square, Rectangular

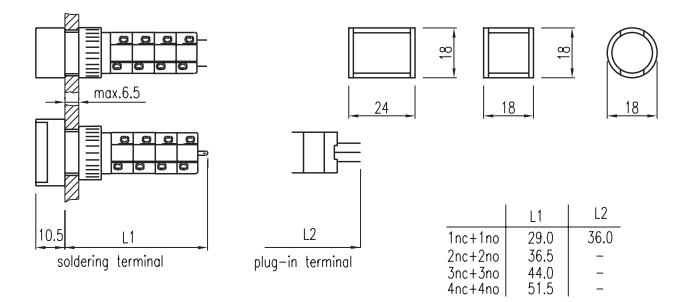


52 Selector

Raised, 2-Position, Round

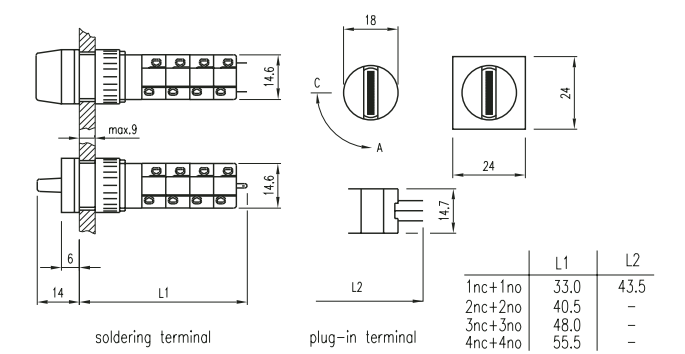


51 Cut-outs

Indicator, Pushbutton, Round, Square, Rectangular

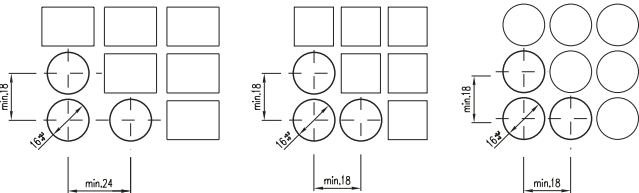

51 Cut-outs

Keylock 2-Position Round, Keylock 2-Position Square, Keylock 2-Position Rectangular, 2 & 3-Position Selector Round

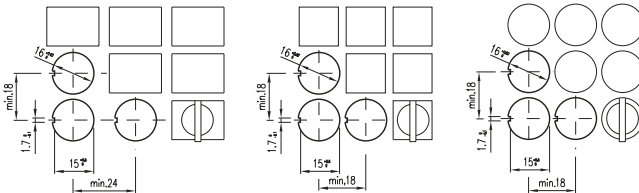

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)