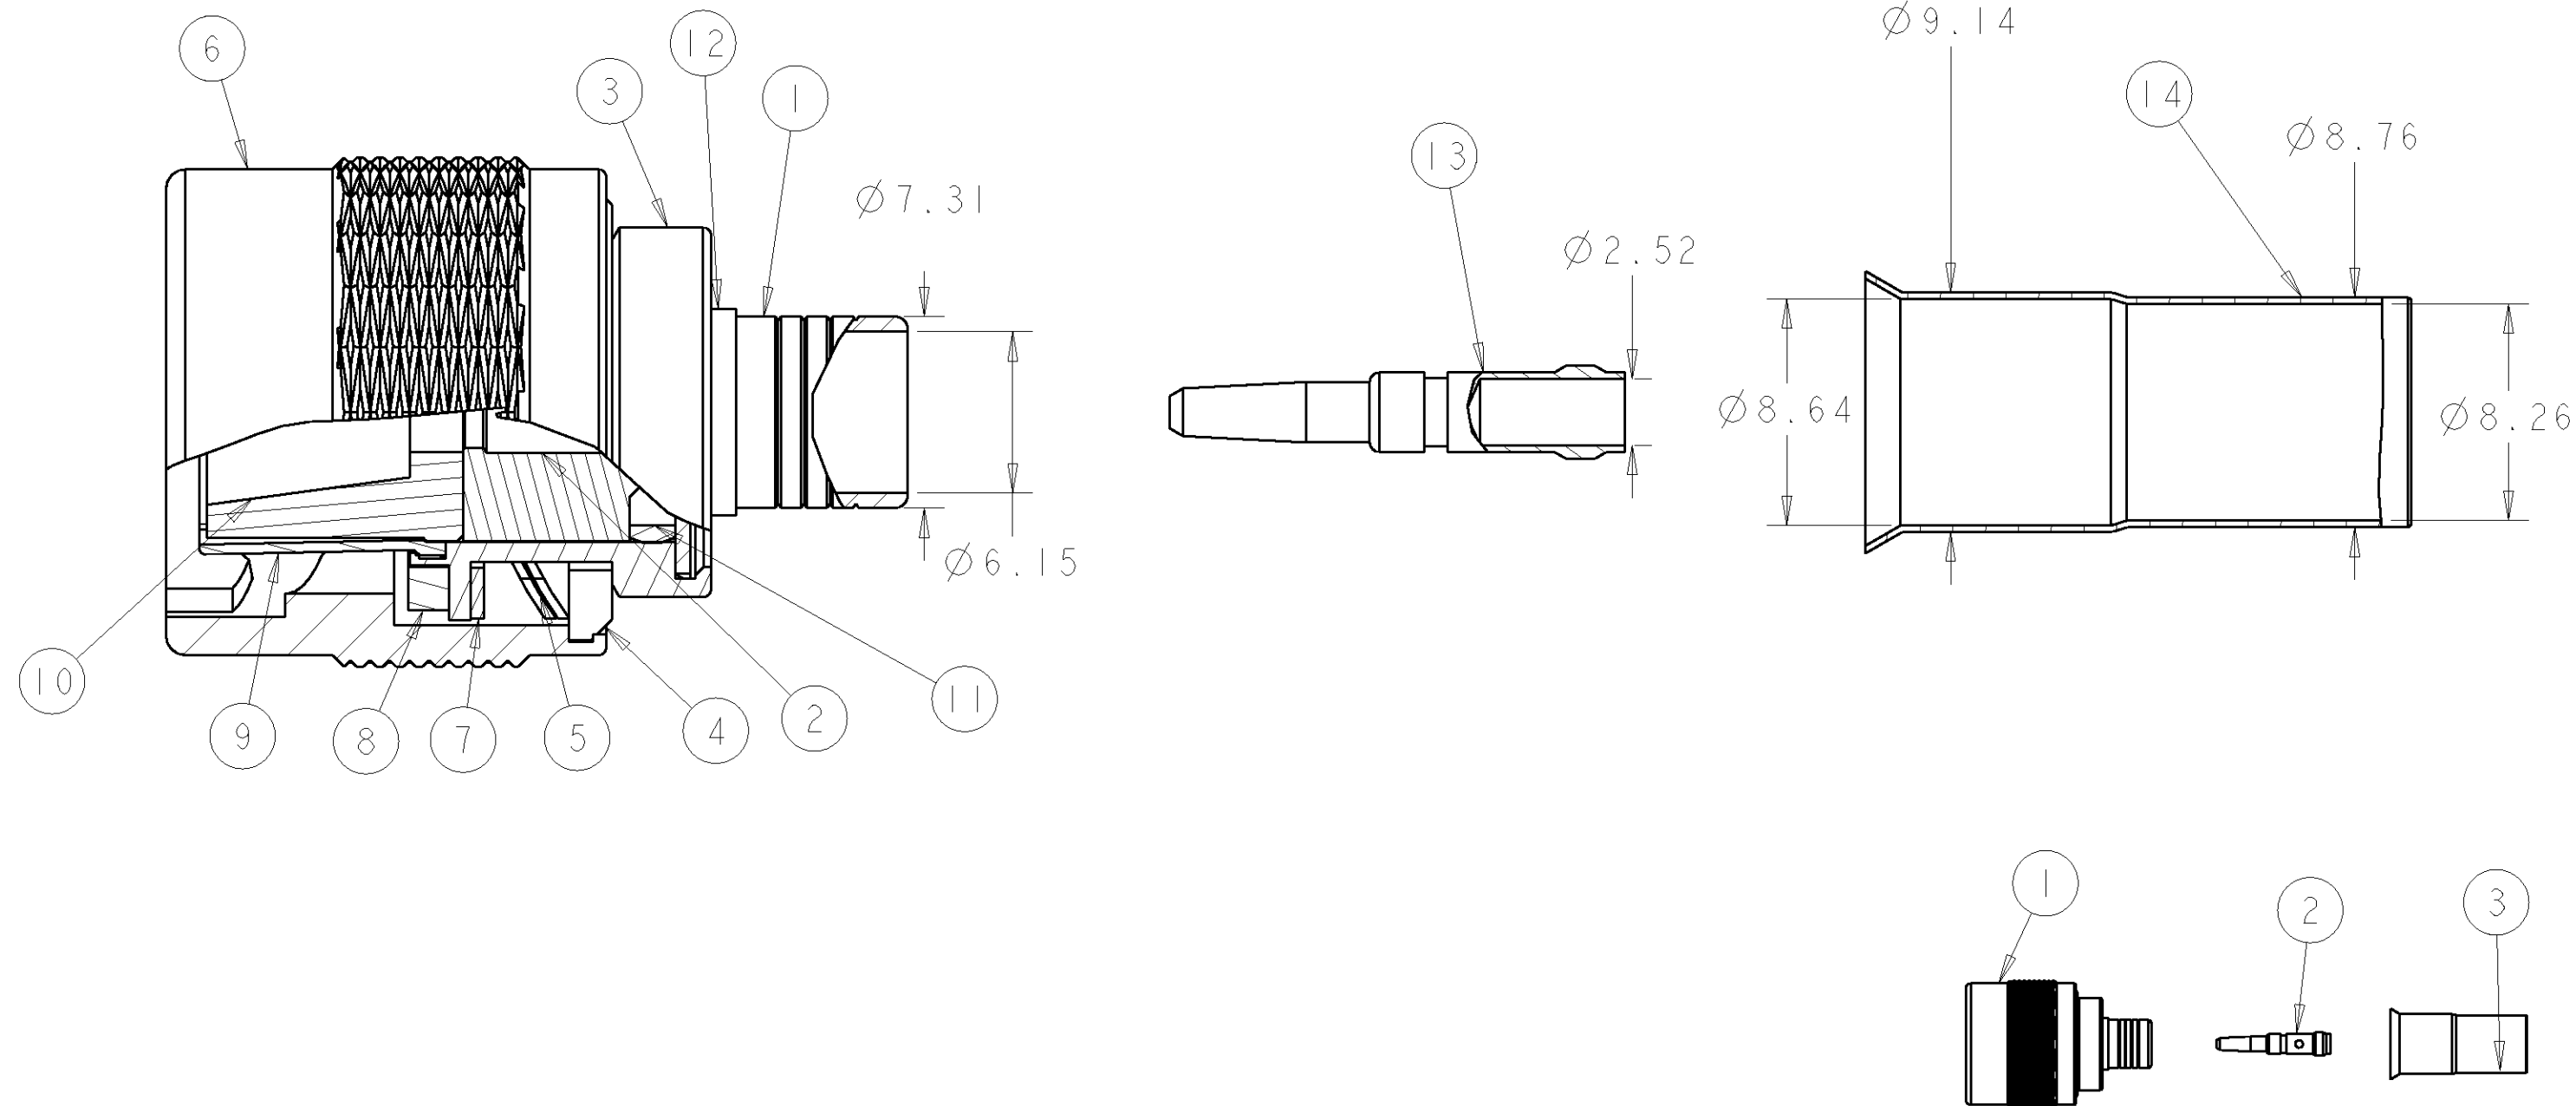


| LOC | DIST | REVISIONS |     |               |          |     |      |
|-----|------|-----------|-----|---------------|----------|-----|------|
| B   | E    | P         | LTR | DESCRIPTION   | DATE     | DWN | APVD |
|     |      |           | A   | First issue   | 16/11/07 | MJG | JA   |
|     |      |           | B   | ECR-07-027921 | 20/11/07 | MJG | JA   |
|     |      |           | C   | ECR-08-008030 | 13/03/08 | MJG | JA   |
|     |      |           |     |               |          |     |      |



NOTES:

1. ELECTROPLATE SILVER OVER COPPER (TARNISH RESISTANT)
2. ELECTROPLATE GOLD OVER NICKEL
3. ELECTROPLATE NICKEL
4. FOR USE ON CABLE FILECA F1703/94 & FILOTEX 50 MFCFB
5. CRIMP WITH HAND TOOL 220015-6
6. PRODUCT WEIGHT APPROX 28g
7. REPLACEMENT PART FOR 1-225407-2

|     |        |      |                 |               |      |                           |           |
|-----|--------|------|-----------------|---------------|------|---------------------------|-----------|
| 1   |        |      | BRASS           | FERRULE       | 14   | FERRULE                   | 3         |
| 1   |        |      | BRASS           | CONTACT       | 13   | CONTACT                   | 2         |
| 1   |        | NONE | SILICONE RUBBER | SEAL          | 12   | PLUG ASSEMBLY<br>SERIES C | 1         |
| 1   |        |      | BRASS           | BUSHING       | 11   |                           |           |
| 1   |        | NONE | PTFE            | DIELECTRIC    | 10   |                           |           |
| 1   |        |      | BeCu            | OUTER CONTACT | 9    |                           |           |
| 1   |        | NONE | SILICONE RUBBER | GASKET        | 8    |                           |           |
| 1   |        | NONE | PTFE            | SPLIT WASHER  | 7    |                           |           |
| 1   |        |      | BRASS           | COUPLING NUT  | 6    |                           |           |
| 2   |        |      | BeCu            | SPRING WASHER | 5    |                           |           |
| 2   |        |      | BRASS           | HALF WASHER   | 4    |                           |           |
| 1   |        |      | BRASS           | BODY          | 3    |                           |           |
| 1   |        | NONE | PTFE            | DIELECTRIC    | 2    |                           |           |
| 1   |        |      | BRASS           | INNER FERRULE | 1    |                           |           |
| QTY | FINISH |      | MATERIAL        | DESCRIPTION   | ITEM | DESCRIPTION               | COMPONENT |

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION  
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION  
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:  
mm

MATERIAL

SEE TABLE

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
  
0 PLC ±0.5  
1 PLC ±0.5  
2 PLC ±0.5  
3 PLC ±0.5  
4 PLC ±-  
ANGLES ±2  
FINISH

DWN M. GREENER 24/09/07  
CHK J. LAMBROSE 24/09/07  
APVD J. LAMBROSE 24/09/07  
PRODUCT SPEC  
108-12005  
APPLICATION SPEC  
-  
WEIGHT 28g

CUSTOMER DRAWING

Tyco Electronics UK Ltd.  
Bideford, North Devon, EX39 4HE

NAME

C SERIES STRAIGHT PLUG CRIMP  
50 OHMN  
FILECA 1703/94, FILOTEX 50 MFCFB

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779

C-1991073




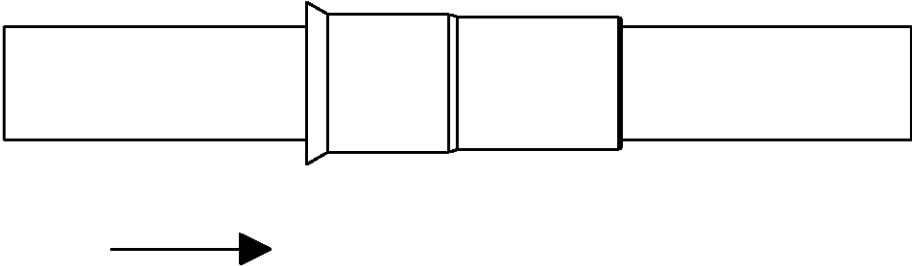
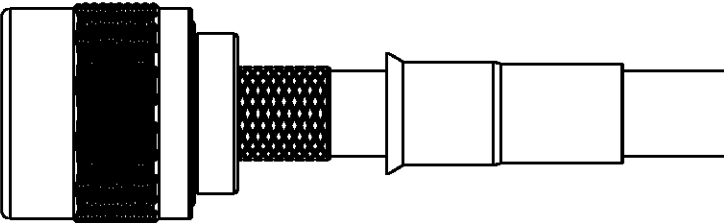
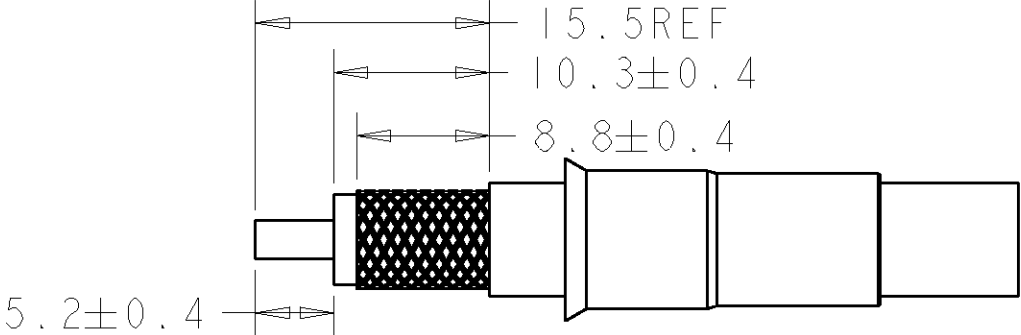
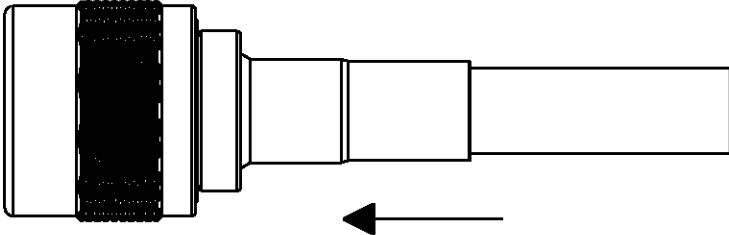
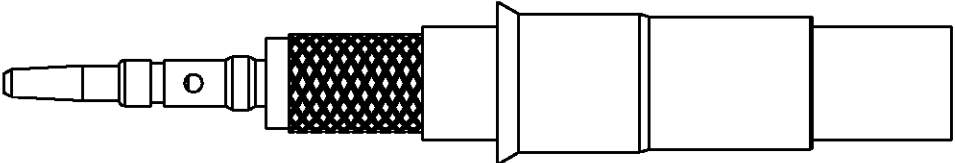
-

SCALE 1:1

SHEET 1

OF 2

REV C

|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
|-----------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------------|-------------|
| 4                                                                                                                     |  | 3                                                                                   |  | 2                                                                                                                                                                                         |      | 1                                                                                   |             |
| THIS DRAWING IS UNPUBLISHED.                                                                                          |  | RELEASED FOR PUBLICATION                                                            |  | 20                                                                                                                                                                                        |      |                                                                                     |             |
| © COPYRIGHT 20                                                                                                        |  | BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.                               |  |                                                                                                                                                                                           |      |                                                                                     |             |
|                                                                                                                       |  |                                                                                     |  | LOC                                                                                                                                                                                       | DIST | REVISIONS                                                                           |             |
|                                                                                                                       |  |                                                                                     |  | B                                                                                                                                                                                         | E    | P                                                                                   | LTR         |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | DESCRIPTION                                                                         | DATE        |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | -                                                                                   | SEE SHEET 1 |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | -                                                                                   | -           |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | -                                                                                   | -           |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | -                                                                                   | -           |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      | -                                                                                   | -           |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
| COMPONENTS                                                                                                            |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
|                                                                                                                       |  | MAIN BODY                                                                           |  | CONTACT                                                                                                                                                                                   |      | FERRULE                                                                             |             |
|                                                                                                                       |  |  |  |                                                                                                        |      |  |             |
|                                                                                                                       |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
| FOR CABLE SEE FRONT SHEET                                                                                             |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
| STEP 1:<br>1. SLIDE FERRULE OVER CABLE                                                                                |  |                                                                                     |  | STEP 4:<br>1. PRESS SUB ASSEMBLY INTO BODY UNTIL CONTACT IS FULLY LOCATED ON CENTRE CONTACT (ITEM 5)<br>2. ENSURE THE KNURLED FERRULE INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID      |      |                                                                                     |             |
|                                    |  |                                                                                     |  |                                                                                                       |      |                                                                                     |             |
| STEP 2: 1. STRIP CABLE TO DIMENSIONS SHOWN<br>2.OPTIONAL TINNING OF CONTACT HERE REQUIRED                             |  |                                                                                     |  | STEP 5:<br>1. SLIDE CRIMP FERRULE UNTIL IT BUTTS AGAINST THE HOUSING BODY<br>2. CRIMP USING TOOL 220015-6                                                                                 |      |                                                                                     |             |
|                                   |  |                                                                                     |  |                                                                                                      |      |                                                                                     |             |
| STEP 3:<br>1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC<br>2. CRIMP OR SOLDER CONTACT TO CONDUCTOR |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
|                                   |  |                                                                                     |  |                                                                                                                                                                                           |      |                                                                                     |             |
|                                                                                                                       |  |                                                                                     |  | THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. |      |                                                                                     |             |
|                                                                                                                       |  |                                                                                     |  | DWN<br>M. GREENER 24/09/07                                                                                                                                                                |      | Tyco Electronics UK Ltd.<br>Bideford, North Devon, EX39 4HE                         |             |
|                                                                                                                       |  |                                                                                     |  | CHK<br>J. AMBROSE 24/09/07                                                                                                                                                                |      | NAME<br>C SERIES STRAIGHT PLUG CRIMP                                                |             |
|                                                                                                                       |  |                                                                                     |  | APVD<br>J. AMBROSE 24/09/07                                                                                                                                                               |      | 50 OHM                                                                              |             |
|                                                                                                                       |  |                                                                                     |  | PRODUCT SPEC<br>108-12005                                                                                                                                                                 |      | FILECA 1703/94, FILOTEX 50 MFCFB                                                    |             |
|                                                                                                                       |  |                                                                                     |  | APPLICATION SPEC<br>-                                                                                                                                                                     |      | RESTRICTED TO<br>-                                                                  |             |
|                                                                                                                       |  |                                                                                     |  | WEIGHT<br>-                                                                                                                                                                               |      | A200779C-1991073                                                                    |             |
|                                                                                                                       |  |                                                                                     |  | CUSTOMER DRAWING                                                                                                                                                                          |      | SCALE 1:1 SHEET 2 OF 2 REV C                                                        |             |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)