


# Series S Size 00 - .039 Centers

## BeCu PLUNGER TIPS

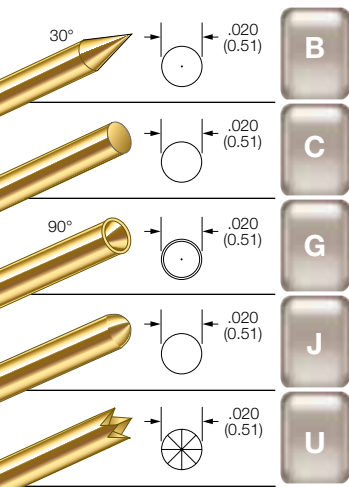

## PROBE SPECIFICATIONS


**Minimum Centers:** .039 (0.99)  
**Current Rating:** 3 amps continuous  
**Spring Force:** 1.3 or 1.6 oz. @ .050 (1.27) travel  
**Typical Resistance:** < 55 mΩ  
**Maximum Travel:** .090 (2.29)  
**Working Travel:** .050 (1.27)

Rated Force oz. (g)	Preload oz. (g)	Material
1.3 (37)	0.6 (17)	BeCu
1.6 (45)	0.7 (20)	SS

## MATERIALS

**Barrel:** Nickel/silver, preplated gold  
**Spring:** Beryllium copper or stainless steel, gold plated  
**Plunger:** Beryllium copper, gold plated over nickel or Duralloy™  
**Receptacle:** Nickel/silver, gold plated  
**Plug-In Terminal:** Beryllium copper, preplated gold

## S-00 PROBE

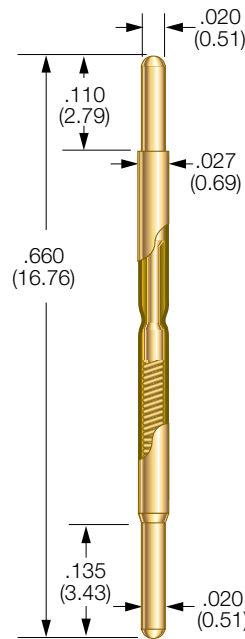

## R-00 Receptacles R00-W-390 / R00-W-500



## FP-Plug



**Drill Size:** 0.75mm  
**Mounting Hole Size:** .028/.0295 (0.71/0.75)  
**Recommended Wire:** 30 gage

## RECEPTACLE OPTIONS

Part Number	Style	Receptacle or Terminal Length	Probe/Receptacle Combined Length	Probe/Receptacle/Terminal Combined Length
R-00-W-390	Receptacle	0.390 (9.91)	0.915 (23.24)	1.03 (26.16)
R-00-W-500	Receptacle	0.500 (12.70)	1.025 (26.04)	1.14 (28.96)
FP-Plug	Plug-In Terminal*	0.285 (7.24)	—	—

\*To order with preattached wire, add wire length and strip length (in inches) to the end of the part number. For example: R-00-W-390-36-1 or FP-Plug-36-1

## HOW TO ORDER: SPRING CONTACT PROBE

<b>S</b>	<b>00</b>	<b>J</b>	<b>1.3</b>	<b>G</b>
SERIES	SIZE	TIP STYLE	SPRING FORCE	PLATING OPTIONS

**SPRING FORCE:**  
 1.3 oz. @ .050 (1.27) TRAVEL  
 1.6 oz. @ .050 (1.27) TRAVEL

**PLATING OPTIONS:**  
**G:** GOLD PLATED PLUNGER  
**D:** DURALLOY™ PLATED PLUNGER

**CRIMPING PLIERS:**  
 CP00W-390  
 CP00W-500  
**INSERTION TOOL:** RT00

## RECEPTACLE

<b>R</b>	<b>00</b>	<b>W</b>	<b>390</b>
SERIES	SIZE	TERMINATION	LENGTH

**TERMINATIONS:**  
**W:** RECEPTACLE

**LENGTHS:**  
 390 OR 500

\* TO ORDER WITH PREATTACHED WIRE, ADD WIRE LENGTH AND STRIP LENGTH (IN INCHES) TO THE END OF THE PART NUMBER. 12" AND 36" STANDARD.

VIEW UPDATES OF THIS INFORMATION AT [WWW.IDINET.COM](http://WWW.IDINET.COM)

Specifications subject to change without notice. Dimensions in inches (millimeters)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)