

NOTES:

1. MATERIALS AND FINISHES:

BODY,R.RING,BODY REAR AND HEX NUTS - BRASS, NICKEL PLATING.
CONTACT - BRASS & BERYLLIUM COPPER, GOLD PLATING.
CRIMP FERRULE - ANNEALED COPPER, NICKEL PLATING.
INSULATOR - PTFE
O-RINGS - SILICONE RUBBER, RED

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM.
B. FREQUENCY RANGE = DC TO 2.0 GHz

3. MECHANICAL:

A. CONNECTOR IS IP-67 COMPLIANT.


4. CABLE ASSEMBLY INSTRUCTIONS:

A. TRIM CABLE AS SHOWN
B. SLIDE FERRULE & BACK NUT ONTO CABLE
C. CRIMP FERRULE USING 0.151" HEX DIE
D. CRIMP OR SOLDER BULLET CONTACT TO CABLE CENTER CONDUCTOR
INSERT CABLE WITH BULLET CONTACT INTO BODY
E. APPLY THREAD LOCKING ADHESIVE ON THE THREADS OF THE BACK NUT
F. TORQUE BACK NUT DOWN TO 15 INCH-LBS


5. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 31-6427, AND DATE CODE"


6 SHOWS CABLE ENTRY DIMENSIONS

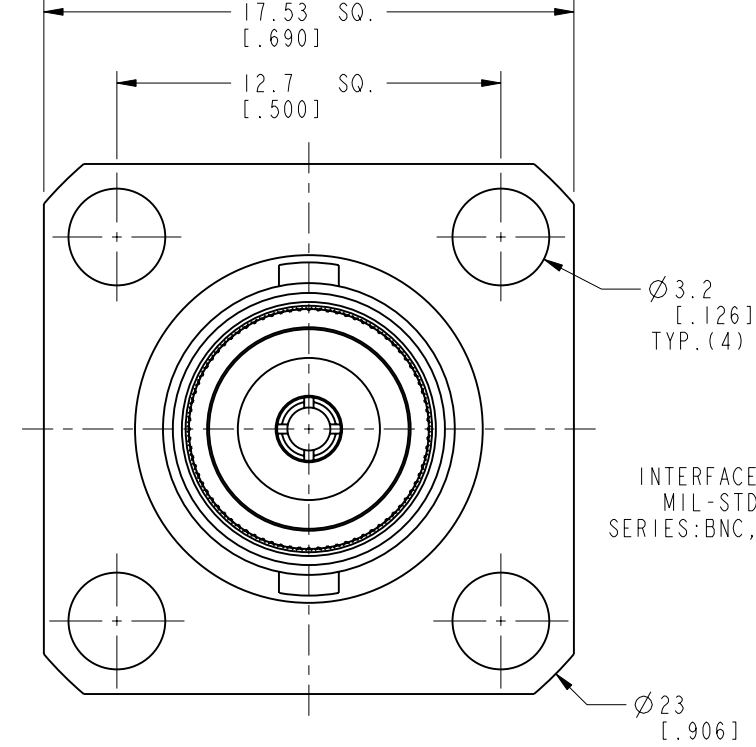

INTERFACE PER
MIL-STD-348
SERIES:BNC,JACK

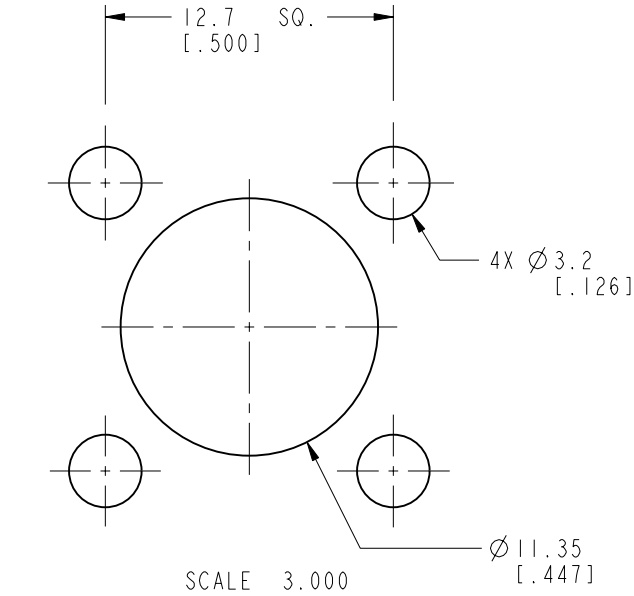


RECOMMENDED MOUNTING
HOLE DIMENSIONS

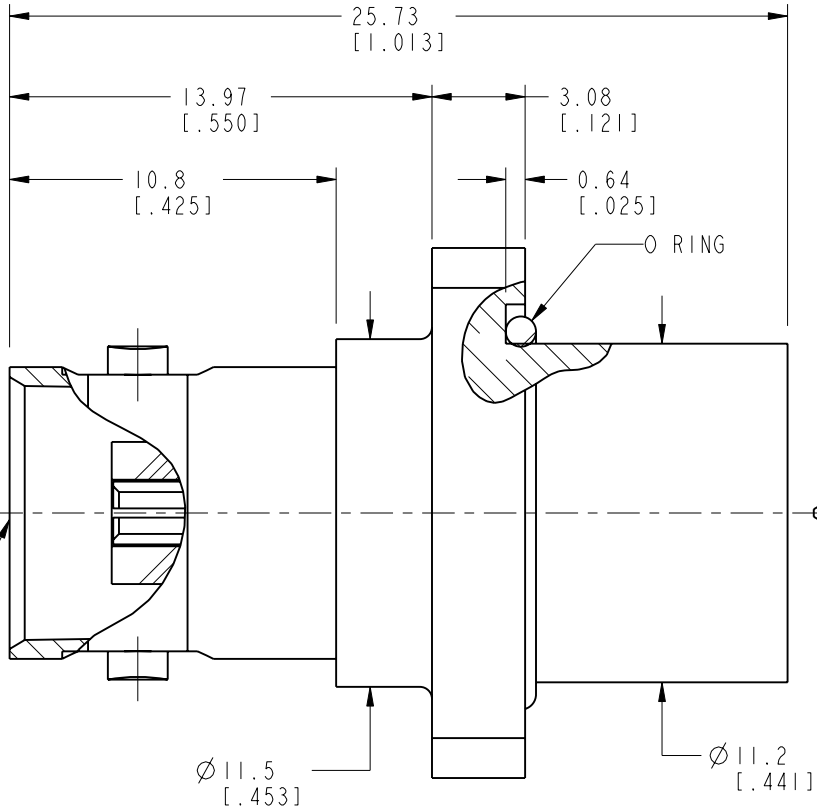



THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	14-Dec-10	48367	TD

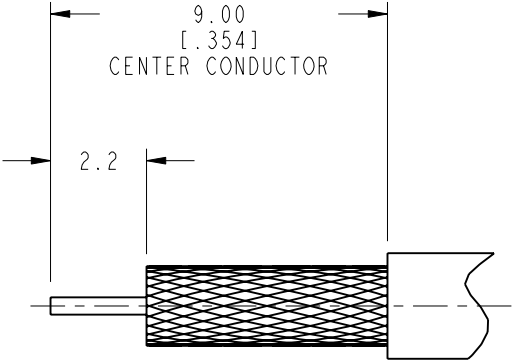

RECOMMENDED CABLE
STRIPPING DIMENSIONS

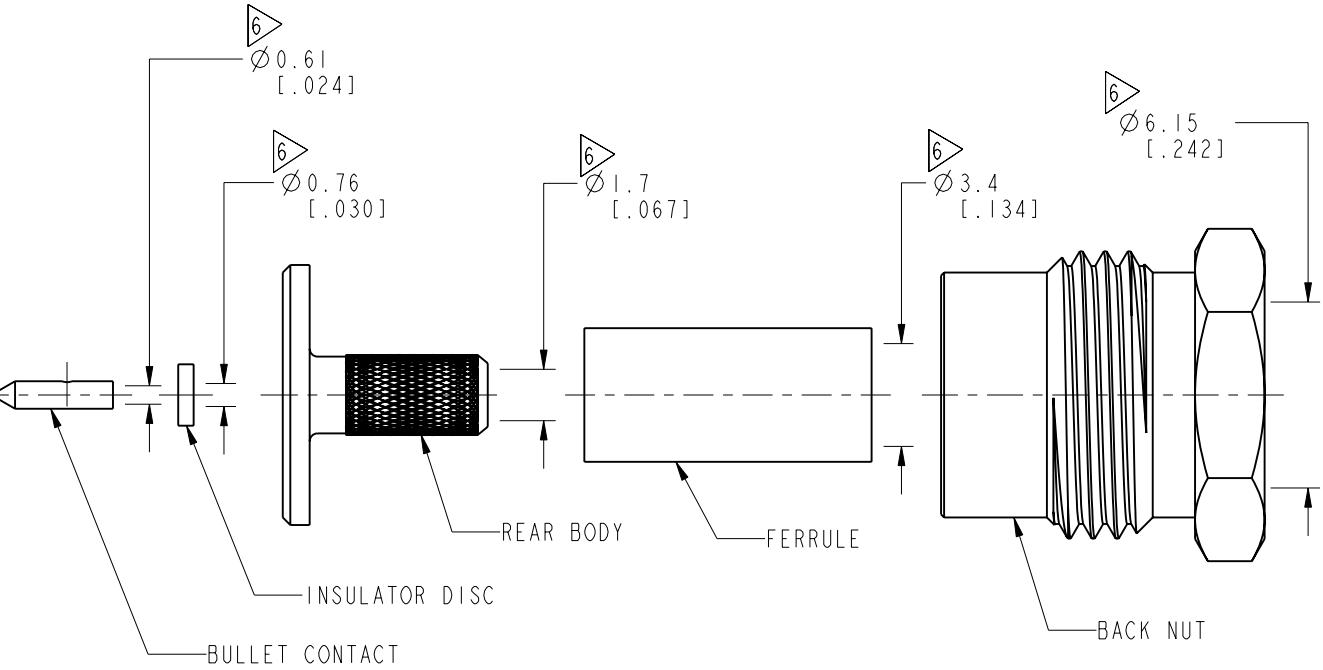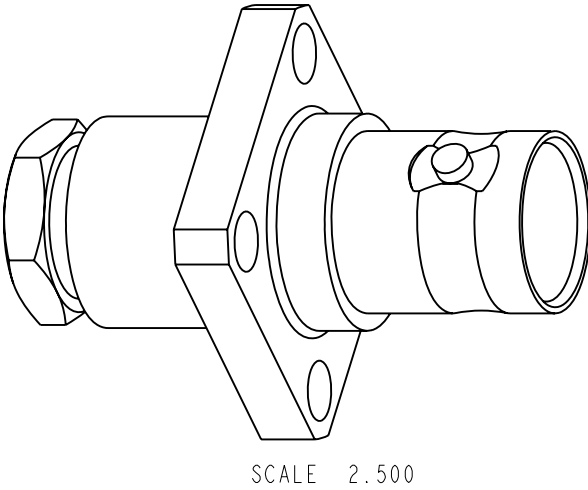

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTES	DRAWN T.DENG	DATE 14-Dec-10	TITLE BNC,JACK 4 HOLE FLANGE IP 67 FOR RD 316 CABLE		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
	ENGINEER NISCHIT MV	DATE 27-Aug-09				
REFERENCE EAR # 3678	APPROVED S.HSIEH	DATE 15-Dec-10	SCALE: 4.0:1.0		SHEET 2 OF 2	DRAWING NO.31-6427
CONFIGURATION LEVEL:	CAD FILE		DWG SIZE		REV	ITEM NO.31-6427
FINISH	Root Folder/BNC/31-6427		B		A	PART NO.31-6427

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru