

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	ECR-14-003312	05MAR2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2151245-2

FOR REPLACEMENT PARTS FOR APPLICATOR 1528456
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1528456

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GOPALAKRISHNA HV		 TE Connectivity				
DIMENSIONS:		CHK RAGHAVENDRA						
		APVD RAGHAVENDRA		NAME FINE ADJ SIDE FD HD-I APPL				
		PRODUCT SPEC						
		APPLICATION SPEC						
MATERIAL		WEIGHT		SIZE A 3	CAGE CODE	DRAWING NO C- 1528456	RESTRICTED TO	
		FINISH		CUSTOMER DRAWING		SCALE	SHEET 1 OF 2	REV B2


DRAWING MADE IN THIRD ANGLE PROJECTION

1528456 1528456

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1528456-1	B	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1528456-2	B	-	BENCH	MECH PRE FEED	CUTS CARRIER
1528456-6	B	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1528456-1	B	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1528456-2	B	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1528456-6	B	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1528456-7	A	-	-	-	SPARE PARTS KIT

CRIMP DATA AMP TERMINAL AMP CRIMP SPECS			
TERMINAL NAME: JUNIOR TIMER CONTACT			
CRIMP	SIZE	TYPE	RANGE
WIRE	2.79 [.110 IN]	F	1.00mm ² -2.50mm ²
INSUL	3.94 [.155 IN]	F	2.40-3.70 [.095-.146 IN]
WIRE STRIP LENGTH		APPL INSTRUCTION	
4.20-4.80 [.165-.189 IN]		408-8322 & 408-8490	
TERMINAL 114-18079 (A)		-	FEED 20.32 [.800 IN]
APPL SPEC 114-18080 (B)		-	
TERMINALS APPLIED			
925595 (A)	-	-	-
925612 (B)	-	-	-
925621 (A)	-	-	-
926006 (B)	-	-	-
926973 (B)	-	-	-
964202 (B)	-	-	-
928805 (B)	-	-	-
826042 (B)	-	-	-
WIRE SIZE	CRIMP HEIGHT	REF SETTING	
mm ² AWG	*		
2.50mm ²	1.70 ±0.05 [.067 ±0.002 IN]	A 8	
14 AWG	1.59 ±0.05 [.063 ±0.002 IN]	B 6	
2.00mm ²	1.58 ±0.05 [.062 ±0.002 IN]	B 6	
1.75mm ²	1.52 ±0.05 [.060 ±0.002 IN]	C 1	
1.50mm ²	1.45 ±0.05 [.057 ±0.002 IN]	C 6	
16 AWG	1.40 ±0.05 [.055 ±0.002 IN]	C 9	
1.25mm ²	1.39 ±0.05 [.055 ±0.002 IN]	D 0	
1.00mm ²	1.32 ±0.05 [.052 ±0.002 IN]	D 5	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	
-	-	-	

- RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- APPLICATOR FEED ADJUSTMENT MAY BE REQUIRED WHEN CHANGING FROM ONE TERMINAL TO ANOTHER.
- TERMINAL 964202 APPLIES A WIRE RANGE OF 1.5-2.5mm² WIRE.

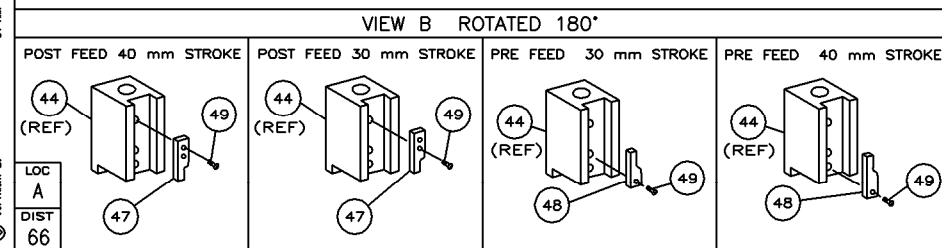

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru