



Extender Cards Prototyping Boards & Development Tools

[Home](#) | [About Us](#) | [Sitemap](#)

Enter Keyword to Search Product



[Custom Design](#)

[Find A Distributor](#)

[Online Specials](#)

[Contact Us](#)


[Shopping Cart](#)

Product Details

- [Prototyping Boards](#)
- [PCI Express Products](#)
- [CompactPCI Products](#)
- [VME / VME64x / VPX Products](#)
- [PMC Products](#)
- [FPGA Development Boards](#)
- [PCI Products](#)
- [SMT & BGA Adapters](#)
- [ExpressCard / PCMCIA / SD](#)
- [ISA Products](#)
- [Data Acquisition Products](#)
- [Do It Yourself \(DIY\) Solder Kits](#)
- [Project Boxes+Protoboards](#)
- [Lead Free Prototyping Products](#)

TW-DIY-5002

CIRCUIT DESCRIPTION The potential difference (PD) across a silicon diode is dependent on its temperature and current through it. Its temperature coefficient is negative, that is, the voltage falls with increasing temperature. This fall is approximately linear and is typically -2.2mV/oC. That is, there is the same drop in voltage when the diode cools from 88 oC to 87 oC as there is when it cools from 23 oC to 22 oC. Better sensors have better linear characteristics. In this Kit we have used a transistor as a diode (base and collector shorted together) which has a more linear temperature response over a bigger range than a diode does. The temperature meter measures the PD across the diode after an offset voltage which is available from pins 1 and 32 of the 7106 has been added. The two 100K 10-turn trim pots are used to calibrate the sensor at two known temperatures. The calibration is easily done using water with ice in it to calibrate zero degrees Centigrade and putting the sensor in a jet of steam from a boiling water kettle to calibrate for 100 oC. The decimal point has been hard-wired on. (The enclosed literature shows you circuits of how to obtain a variable decimal point.)

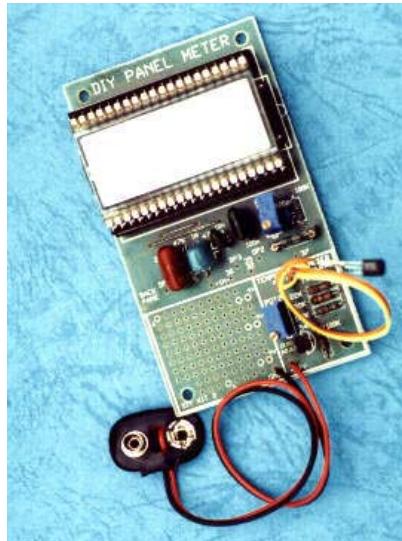

[zoom photo](#)

Temperature Meter Kit - DIY

This Kit shows how much of electronics today can be contained in a single chip, the Intersil 7106. Commercial low cost digital voltmeters are nothing more than this kit, some switches and passive components and a nice plastic case.

• COMPONENTS

Resistors 1% metal film:
 1M brown black black yellow 2
 22K red red black red 1
 47K yellow violet black red 1
 100K brown black black orange 3
 220K red red black orange 1
 Capacitors:
 100p 101 monoblok 1
 220n 224 metallized 1
 10n 103 mylar 1
 100n 104 mylar 1
 470n 474 metallized 1
 BC547 or BC548 2
 10 turn trimpot 2
 40 pin IC socket 3
 7106 IC 1
 hookup wire
 9V battery snap 1
 Box #2 and screws 1
 LCD VI302-DP-RC 1
 Kit 2 PCB 1"



ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru