



# MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929




## SWITCH-TOGGLE

CATALOG LISTING  
2TL11 SERIES  
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

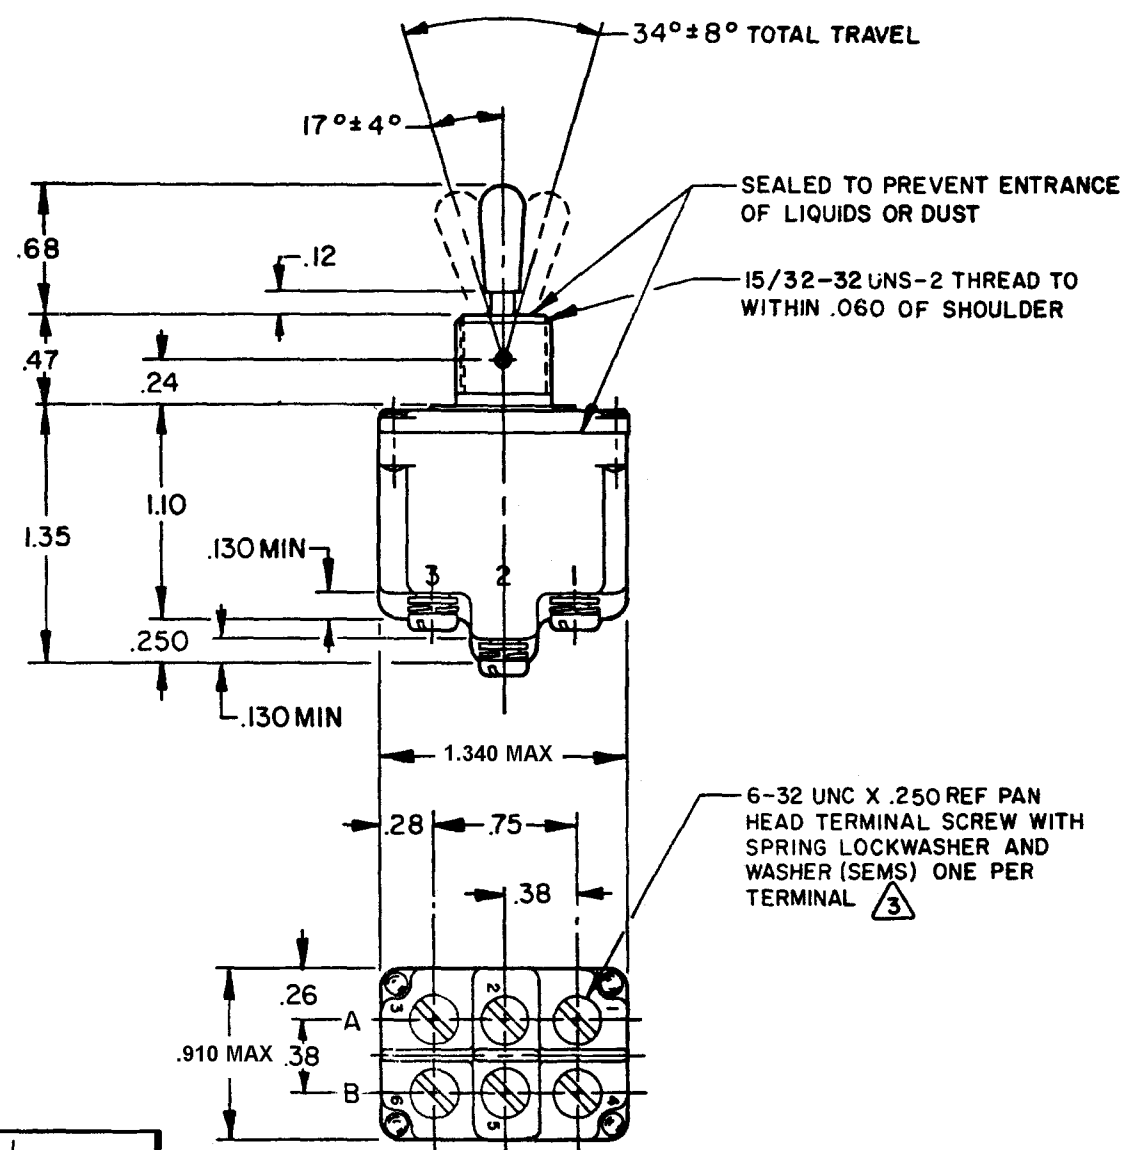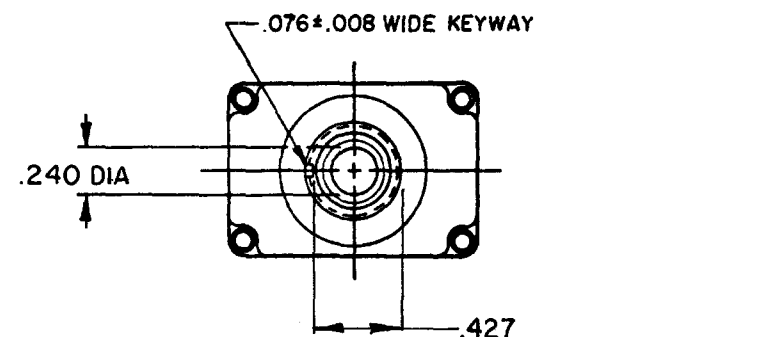

| CATALOG LISTING | CIRCUIT MADE WITH TOGGLE LEVER IN |                     |                              |                            | CURRENT CAPACITY (AMPS) |     |          |     |              |            |                   |            |
|-----------------|-----------------------------------|---------------------|------------------------------|----------------------------|-------------------------|-----|----------|-----|--------------|------------|-------------------|------------|
|                 | KEYWAY SIDE<br>(1-2,4-5)          | CENTER<br>(1-2,4-5) | OPPOSITE KEYWAY<br>(2-3,5-6) | RESISTIVE LOAD<br>DC VOLTS |                         |     | AC VOLTS |     | LAMP<br>LOAD |            | INDUCTIVE<br>LOAD |            |
|                 |                                   |                     |                              | 28                         | 125                     | 250 | 125      | 250 | 28<br>VDC    | 125<br>VAC | 28<br>VDC         | 125<br>VAC |
| 2TL11-1         | ON                                | OFF                 | ON                           | 20                         | .75                     | .5  | 15       | 6   | 7            | 4          | 15                | 15         |
| 2TL11-2         | OFF                               | NONE                | ON                           |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-3         | ON                                | NONE                | ON                           |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-21        | NONE                              | OFF                 | ON                           |                            |                         |     |          |     |              |            |                   |            |
| Ⓒ               | NONE                              | ON                  | ON                           |                            |                         |     |          |     |              |            |                   |            |
| Ⓕ               | MOM OFF                           | NONE                | ON                           | 18                         | .75                     | .5  | 11       | 6   | 5            | 2          | 10                | 8          |
| 2TL11-5         | MOM ON                            | OFF                 | ON                           |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-6         | MOM ON                            | NONE                | OFF                          |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-7         | MOM ON                            | OFF                 | MOM ON                       |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-8         | MOM ON                            | NONE                | ON                           |                            |                         |     |          |     |              |            |                   |            |
|                 |                                   |                     |                              |                            |                         |     |          |     |              |            |                   |            |
| Ⓕ               | NONE                              | ON                  | MOM ON                       |                            |                         |     |          |     |              |            |                   |            |
| Ⓒ               | MOM ON                            | OFF                 | NONE                         |                            |                         |     |          |     |              |            |                   |            |
| 2TL11-82        | ON                                | NONE                | MOM ON                       |                            |                         |     |          |     |              |            |                   |            |



### NOTES

- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- FURNISHED UNASSEMBLED
- FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
- APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

SCALE FULL  
DO NOT SCALE PRINT  
UNLESS OTHERWISE NOTED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.015  
THREE PLACE (.000) ±.005  
ANGLES ±.005  
WEIGHT .12 LB APPROX

CATALOG LISTING  
2TL11 SERIES CHART 1  
PAGE 1 OF 1  
ISSUE 16  
REVISIONS  
A CO35421 L S D 28 JUN 77  
B CO49070 G R T 16 MAY 81  
C CO50496 T S K 13 NOV 81  
D CO59379 S J 8 SEP 86  
E CO78047 S A D 22 AUG 94  
F CO95307 C S L 18 NOV 99  
G 203655 J L H 27 AUG 01  
H 0003011 K R B 05 FEB 04  
DRAWN RASTER  
CHECK 28 JUN 77  
CHECK 06 FEB 04  
RELEASE NO.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)