

MICRO SWITCH

FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91880

SWITCH - TOGGLE

CATALOG LISTING
112TW1-50 SERIES

CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

ELECTRICAL DATA

28 VDC & 125 VAC
5 AMP RES
2 AMP IND
1 AMP LAMP

CATALOG
LISTING

AVAILABLE
LOCKING
COMBINATIONS
FOR CONFIGURATION
SEE LETTERING
DETAILS

STYLE
NUMBER

112 TW1-50


E, F, K, L, M, N

1


2




LOCKED IN
THREE POSITIONS




LOCKED IN
CENTER AND
EXTREME POSITION
(KEYWAY SIDE)




LOCKED OUT
OF CENTER
POSITION




LOCKED IN
CENTER POSITION




LOCKED IN
EXTREME POSITION
(OPPOSITE KEYWAY)




LOCKED IN
EXTREME POSITION
(KEYWAY SIDE)



LOCKED OUT OF
CENTER AND
EXTREME POSITION
(KEYWAY SIDE)



LOCKED OUT OF
CENTER AND
EXTREME POSITION
(OPPOSITE KEYWAY)




LOCKED IN
CENTER AND
EXTREME POSITION
(OPPOSITE KEYWAY)




LOCKED OUT OF
EXTREME POSITION
(KEYWAY SIDE)




LOCKED OUT OF
AND INTO
EXTREME POSITION
(OPPOSITE KEYWAY)




LOCKED OUT OF
EXTREME POSITION
(OPPOSITE KEYWAY)




LOCKED OUT OF
AND INTO
EXTREME POSITION
(KEYWAY SIDE)



LOCKWASHER
(PART NO. TS-10013)





LOCKING RING
(PART NO. EN-12449)



HEX NUT (2)
(PART NO. TL-10632)

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
MOMENTARY POSITION	MAINTAINED POSITION	MAINTAINED POSITION

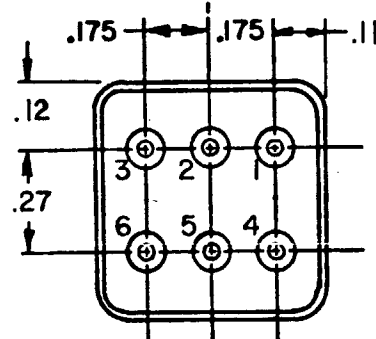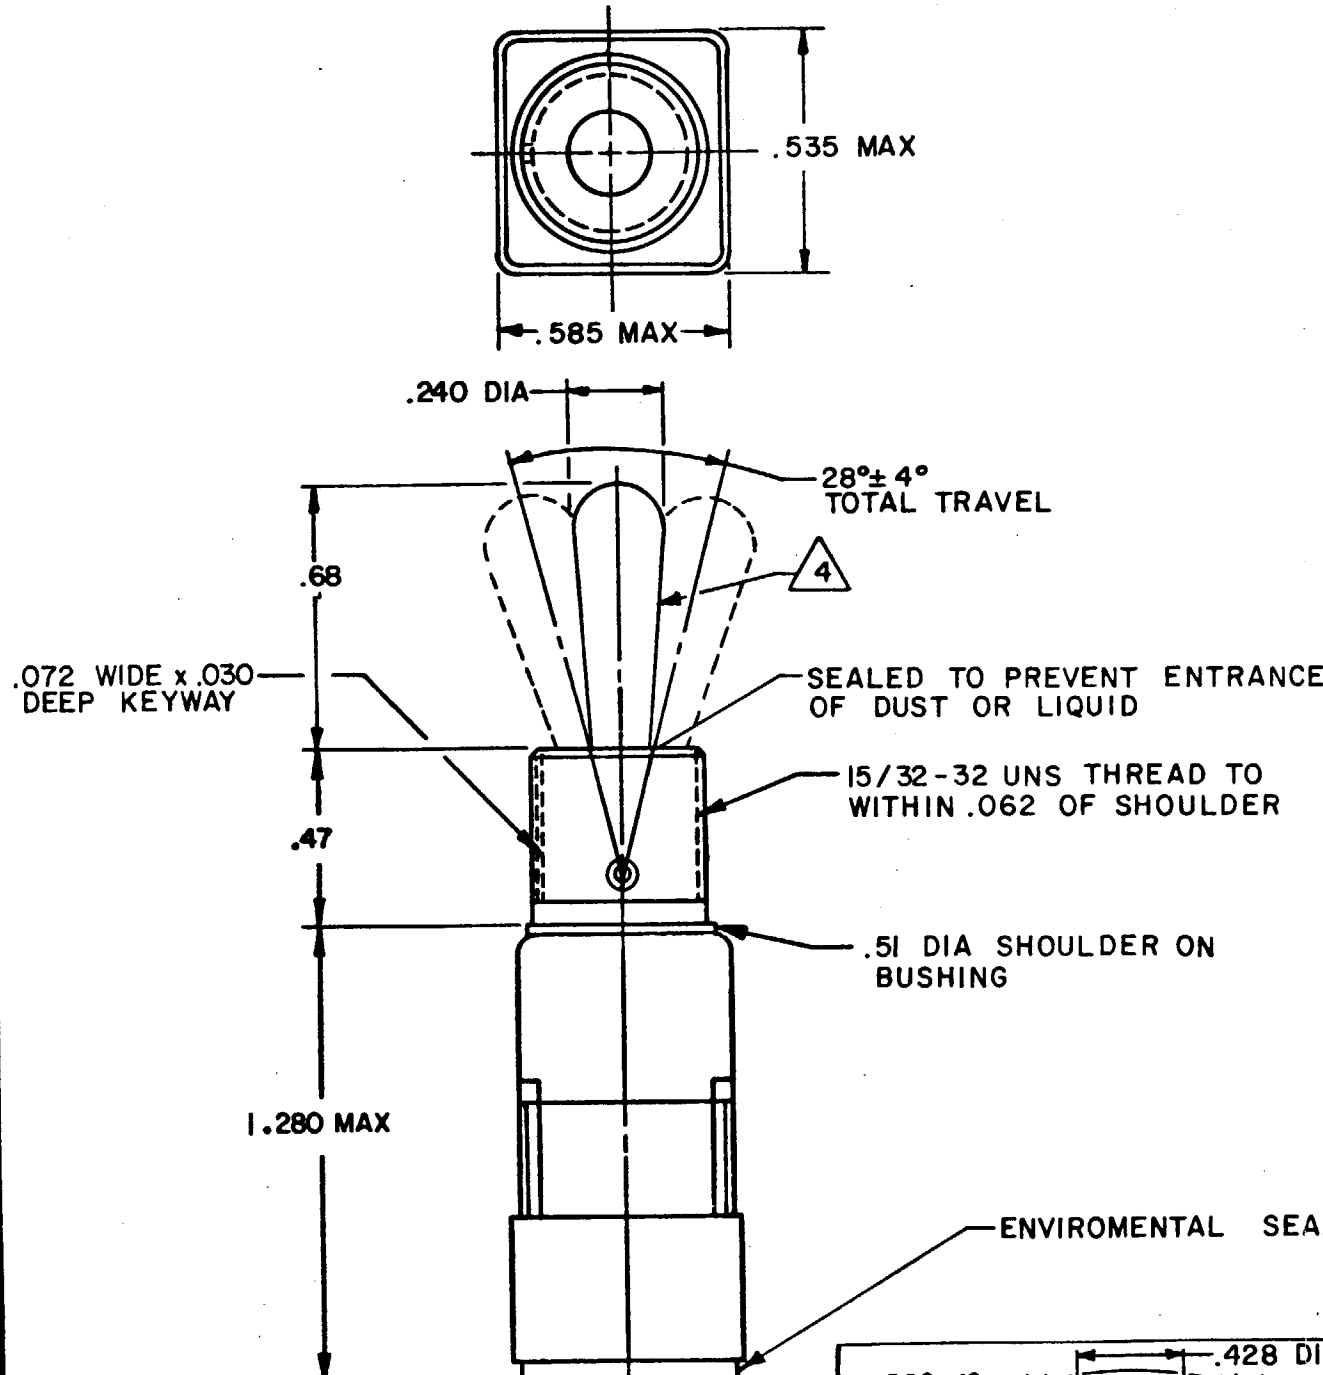

STYLE 2 LEVER

NOTES

- 1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101
- 2 - SWITCH DESIGNED TO CONFORM TO MS 277 021 EXCEPT TERMINATION LENGTH AND WEIGHT
- 3 - FURNISHED UNASSEMBLED
- 4 - MATTE FINISH
- 5 - SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING

SCALE 2:1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT

112TW1-50 SERIES
CHART 1

DRAWING
NUMBER

ISSUE
X 6

REVISIONS

A CO
505 65

B CO
534 17

C CO
536 02

D CO
536 02

E CO
536 02

F CO
536 02

G CO
536 02

H CO
536 02

I CO
536 02

J CO
536 02

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru