


PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION
1855618-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER
1855618-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER
1855618-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER
1855618-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER
7-1855618-7	A	-	-	-	SPARE PARTS




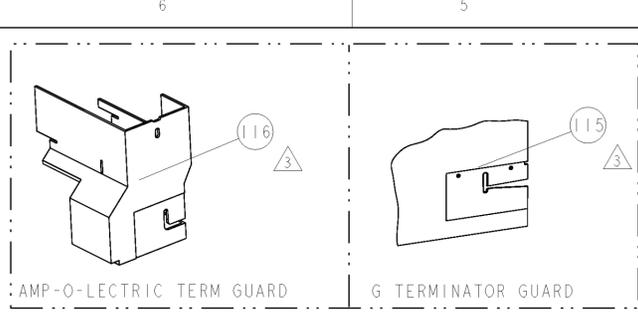


TERMINAL NAME: CRIMP SOCKET & PIN			
TE PN	SOURIAU	SOURIAU TERMINAL - TE CRIMP SPECS	
2113162	CF10SCI8RF		
-	CF10PCI8RF		
-	-	CRIMP HEIGHT	WIRE SIZE
-	-	1.27mm+ .05/- .05 [.050+ .002/- .002]	20AWG or 0.6mm2
-	-	1.14mm+ .05/- .05 [.045+ .002/- .002]	22AWG or 0.35mm2
-	-	-	-
-	-	-	-
-	-	CRIMP	SIZE
-	-	WIRE	1.40mm [.055]
-	-	INSUL	2.03mm [.080]
-	-	FEED	8.89
-	-	APPLICATOR INSTRUCTIONS	408-8040
-	-	SET UP GAGE	458637-1
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS
3.05-3.81	NONE	8.89	408-8040

LOC	DIST	REV	DATE	BY	APPV
A	66	A	04FEB2011	RS	TE

- RECOMMENDED SPARE PARTS
- GREASE LIGHTLY
- GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE.
- TERMINAL LUBRICANT IS RECOMMENDED.

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

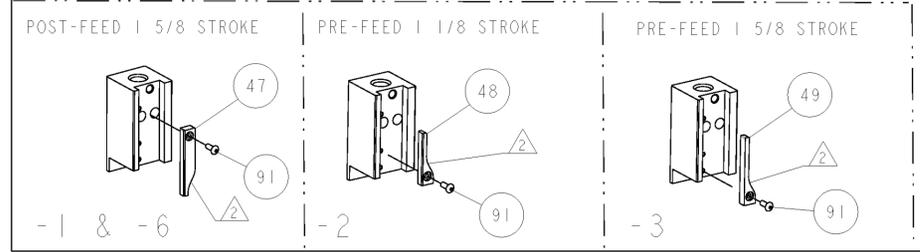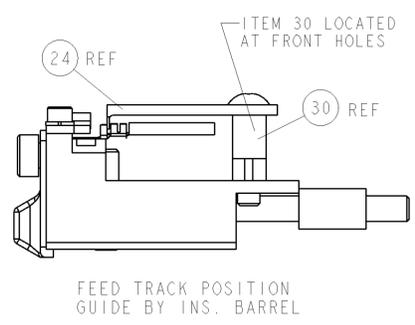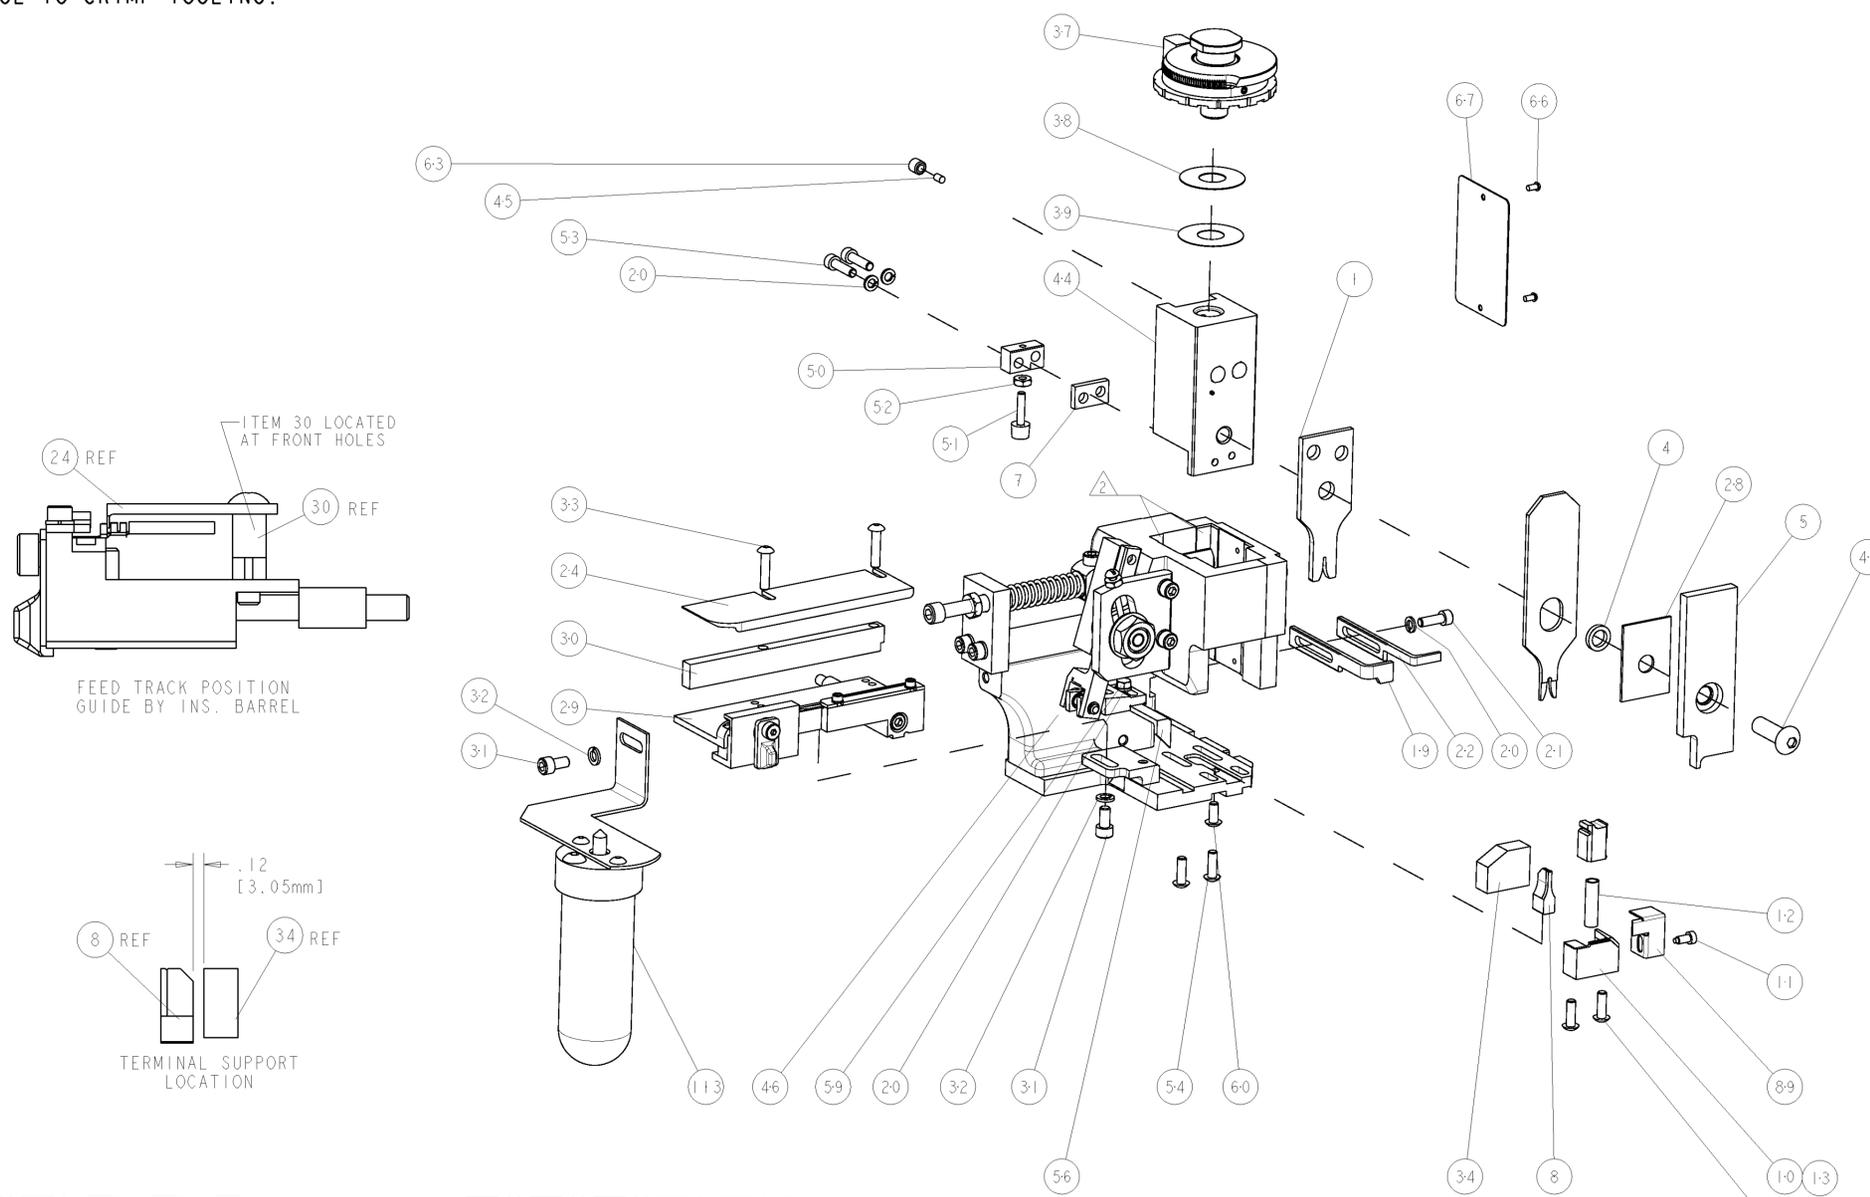

QTY	REF	DESCRIPTION	ITEM NO
-	-	455749-1	GUARD WINDOW
-	-	679532-1	INSERT, GUARD
-	-	1-465184-0	LUBRICATOR ASSY
-	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375
-	-	318563-1	GUARD, FRONT CHIP
-	-	4088040	SF APPL INST 408-8040
-	-	217238-1	GENERAL INSTRUCTION PKG
-	-	461264-5	PLATE, IDENTIFICATION
-	-	21017-2	SCREW, DRIVE
-	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250
-	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375
-	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312
-	-	458537-2	PAWL, FEED
-	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500
-	-	2-21000-8	SCR, SKT HD CAP 8-32 X .625
-	-	21018-5	NUT, HEX, REG 6-32
-	-	811242-2	BUMPER, HOLD DOWN
-	-	690753-1	SPACER, TONKER
-	-	690602-6	CAM, PRE FEED, 1 5/8
-	-	690602-5	CAM, PRE FEED, 1 1/8
-	-	690501-4	CAM, POST-FEED 1 5/8
-	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)
-	-	690191-1	PLUG, NYLON
-	-	455673-1	RAM, SIDE FEED
-	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00
-	-	690125-1	SHIM SUB-ASSY
-	-	1-469367-0	SHIM
-	-	879103-3	FINE ADJUST HEAD ASSEMBLY
-	-	690786-1	TERMINAL SUPPORT
-	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750
-	-	21024-5	WASHER, SPRG LOCK, REG NO 10
-	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375
-	-	1-1320908-5	SPACER, STRIP GUIDE
-	-	1633091-1	ASSEMBLY, STRIP GUIDE
-	-	1-455888-0	SPACER, CRIMPER
-	-	1320928-1	PLATE, STRIP GUIDE
-	-	690472-2	STRIPPER
-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500
-	-	21024-4	WASHER, SPRG LOCK, REG NO 8
-	-	691353-1	STRIPPER
-	-	679625-2	SHEAR HOLDER, FRONT (NO CUT)
-	-	3-22280-3	SPRING, COMPRESSION
-	-	690461-2	STOP, SHEAR
-	-	1-690459-0	SHEAR HOLDER, FRONT
-	-	462006-6	FLOATING SHEAR, FRONT
-	-	3-1633106-2	ANVIL, COMBINATION .055
-	-	240641-5	SPACER
-	-	-	-
-	-	2-455889-0	DEPRESSOR, SHEAR
-	-	1-238011-0	BLOCK, CRIMPER SPACER
-	-	1633398-4	CRIMPER, INSULATION 0
-	-	-	-
-	-	4-459492-6	CRIMPER, WIRE 0

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	FINISH:	WEIGHT:	CUSTOMER ACCESSIBLE PRODUCTION DRAWING
INCHES	9 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.001 4 PLC ±.0001			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru