


PRODUCT NUMBER

88902-XXX

88902-XXYLF

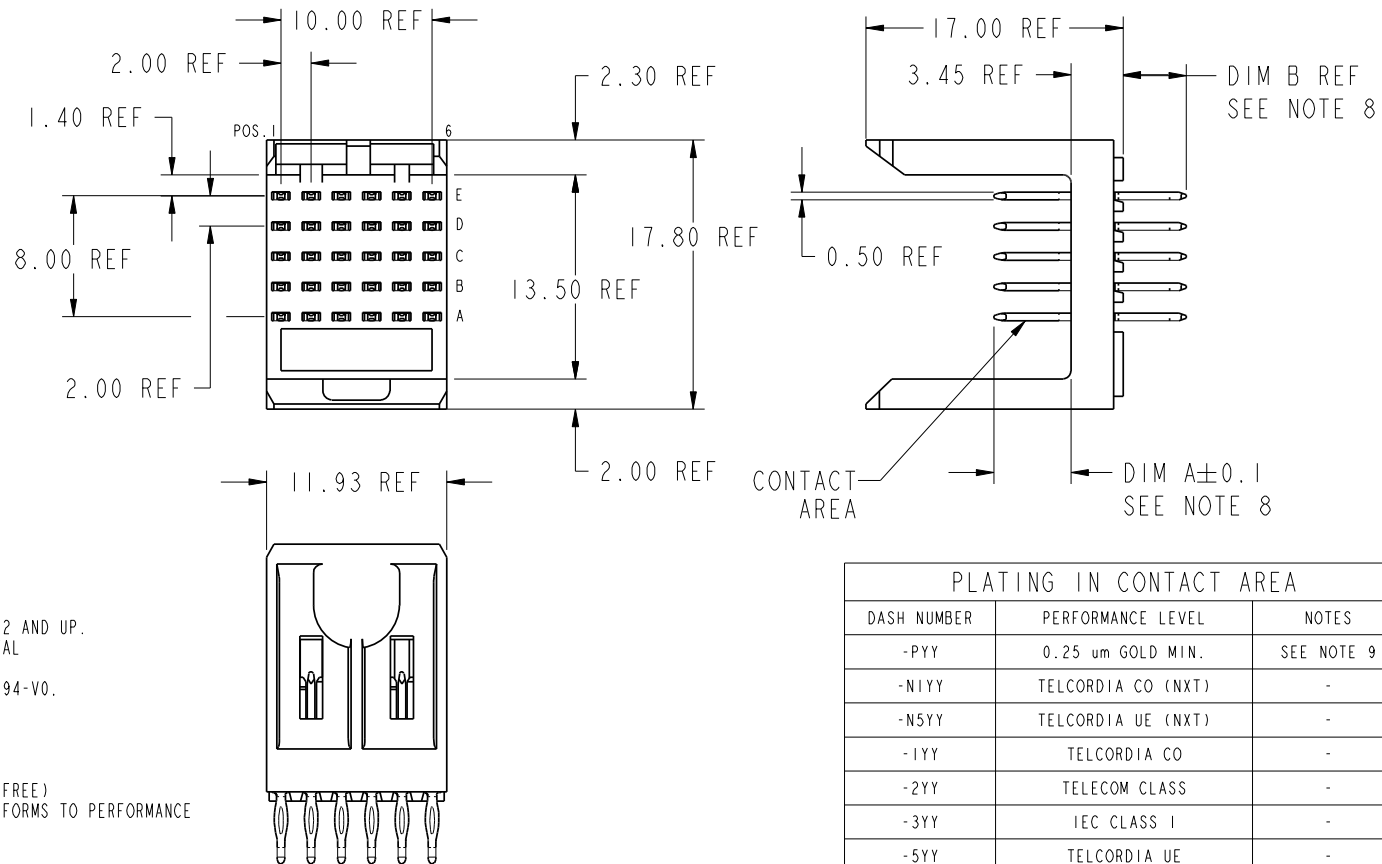

NOTES:

1. FOR DIM A, AND B SEE SHEET 2 AND UP.
2. BODY MATERIAL: LIQUID CRYSTAL POLYMER 30 % GLASS.
FLAME RETARDANT ACC. UL 94-V0.
3. PIN MATERIAL:
PHOSPHOR BRONZE
4. PLATING ON PRESS-FIT TAIL:
88902-XXX IS SnPb
88902-XXYLF IS Sn (LEAD FREE)
PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE BELOW.
5. PRODUCT MARKING:
PART NUMBER DESIGNATION J& BATCH I.D.
6. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER. EXAMPLE: XXXXX-XXXP OR XXXXX-XXXPPLF
7. PRODUCT SPECIFICATION: GS-12-180
APPLICATION SPECIFICATION: BUS-20-073
8. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
9. -Ayy PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE)
10. THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. FOR LEAD FREE PART NUMBERS, ADD AN 'LF' SUFFIX. EXAMPLE: 88902-X01LF.
12. ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-N1--- OR (DRAWING NO.)-N5--- WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-N1--- AND (DRAWING NO.)-N5--- WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACES OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM OF 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.


PLATING IN CONTACT AREA

DASH NUMBER	PERFORMANCE LEVEL	NOTES
-PYY	0.25 um GOLD MIN.	SEE NOTE 9
-NIYY	TELCORDIA CO (NXT)	-
-N5YY	TELCORDIA UE (NXT)	-
-1YY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-NIYYLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-N5YYLF	TELCORDIA UE (NXT)	SEE NOTE 10
-1YYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF	TELECOM CLASS	SEE NOTE 10
-5YYLF	TELCORDIA UE	SEE NOTE 10

MATERIAL CODE				SEE NOTES		TOLERANCES UNLESS OTHERWISE SPECIFIED		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	angles	dr	engr	chr	appd	COPY	projection
X	DG09-0256	TER	2009-08-19								
Y	DG09-0306	TER	2009-09-14								
AA	DG09-0366	TER	2009-11-24								
AB	DG10-0165	TER	2010-05-05								
AC	DG10-0243	TER	2010-06-28								
-	-	-	-								
W	DG09-0169	TER	2009-05-25								
sheet index	revision sheet	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC
		1	2	3	4						

COPY

projection



MM

scale

2:1



www.fciconnect.com

title
METRAL SIGNAL HEADER
1 MOD, 5 ROW PRESS-FIT

product family METRAL

size dwg no

A 88902

sheet 1 of 4


code 213

code code 22506

1 | 2

3 |

4

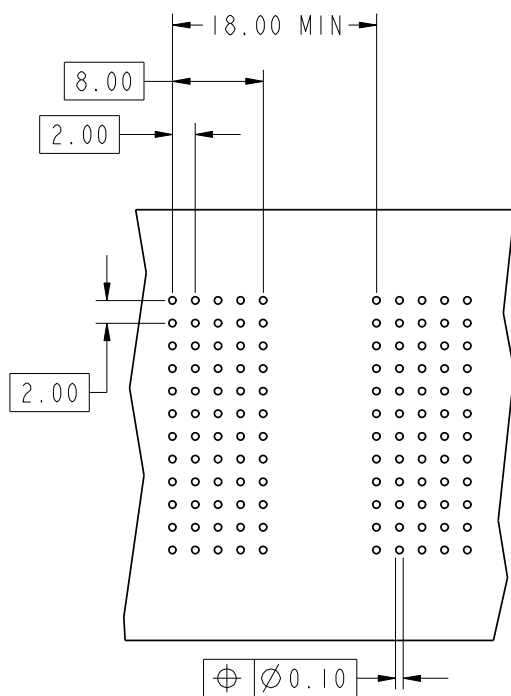

KEY (SIGNAL PRESS-FIT)		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
19	8.00	4.30
20	8.00	13.60
39	8.00	14.10
54	5.00	11.55
55	5.75	11.55
57	7.25	11.55

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	0.X $\pm$ 0.3	COPY		www.fciconnect.com	
AC					0.XX $\pm$ 0.13	projection		title	
				angles	.XXX $\pm$ 0.051			METRAL SIGNAL HEADER 1 MOD, 5 ROW PRESS-FIT	
					0° $\pm$ 2°				
				dr	T. BRUNGARD 11/19/99			product family	
				enr	M. STRAWSER 11/19/99			METRAL	
				chr	M. STRAWSER 11/19/99			size	dwg no
				appd	M. STRAWSER 02/29/00			A	88902
sheet	revision								
index	sheet								

1 | 2

Pro/E

PDM: Rev:AC

STATUS: Released

Printed: Jul 01, 2010




METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X01 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	1919
	D	2	2	2	2	1919
	C	2	1	2	3	2 2
	B	2	2	2	2	1919
	A	2	2	2	2	1919
88902-X02 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	2020
	D	6	6	6	6	2020
	C	6	5	6	7	6 6
	B	6	6	6	6	2020
	A	6	6	6	6	2020
88902-X03 SEE NOTE 11 FOR LEAD FREE	E	5	3	3	3	3 3
	D	5	3	3	3	3 3
	C	5	3	3	3	3 3
	B	5	3	3	3	3 3
	A	5	3	3	3	3 3
88902-X04 SEE NOTE 11 FOR LEAD FREE	E	7	6	6	6	6 6
	D	7	6	6	6	6 6
	C	7	6	6	6	6 6
	B	7	6	6	6	6 6
	A	7	6	6	6	6 6
88902-X05 SEE NOTE 11 FOR LEAD FREE	E	3	3	2	4	4 19
	D	3	3	2	4	4 19
	C	3	3	2	4	4 19
	B	3	3	2	4	4 19
	A	3	3	2	4	4 19

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X06 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	4	2 2
	D	2	2	2	4	2 2
	C	2	2	2	4	2 2
	B	2	2	2	4	2 2
	A	2	2	2	4	2 2
88902-X07 SEE NOTE 11 FOR LEAD FREE	E	57	55	55	55	5555
	D	57	55	55	55	5555
	C	57	55	55	55	5555
	B	57	55	55	55	5555
	A	57	55	55	55	5457
88902-X08 SEE NOTE 11 FOR LEAD FREE	E	3	2	2	2	2 2
	D	3	2	2	2	2 2
	C	3	2	2	2	2 2
	B	3	2	2	2	2 2
	A	3	1	2	2	2 2
88902-X09 SEE NOTE 11 FOR LEAD FREE	E	39	39	39	39	3939
	D	39	39	39	39	3939
	C	39	39	39	39	3939
	B	39	39	39	39	3939
	A	39	39	39	39	3939
88902-X10 SEE NOTE 11 FOR LEAD FREE	E	4	2	2	2	2 2
	D	4	2	2	2	2 2
	C	4	2	2	2	1 4
	B	4	2	2	2	2 2
	A	4	2	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X11 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2 1
	D	2	2	2	2	2 2
	C	2	2	2	1	2 1
	B	2	2	2	2	2 2
	A	2	2	2	1	2 1
88902-X12 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	5	6 5
	D	6	6	6	6	6 6
	C	6	6	6	5	6 5
	B	6	6	6	6	6 6
	A	6	6	6	5	6 5
88902-X13 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	2	-	2 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X14 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	2	2	2	2	2 2
	A	2	2	2	2	2 2
88902-X15 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X16 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	3 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 3
88902-X17 SEE NOTE 11 FOR LEAD FREE	E	4	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	1	- 2
	A	2	-	1	-	2 -
88902-X18 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X19 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	8	6	6	6	6 6
	B	6	6	6	6	2020
	A	5	6	6	6	2020
88902-X20 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	6	6	6	6	6 8
	B	20	20	6	6	6 6
	A	20	20	6	6	6 6

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X21 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 2
	B	2	19	2	19	2 2
	A	2	19	2	19	2 2
88902-X22 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	4	2	2	2	2 2
	B	2	2	2	2	1919
	A	1	2	2	2	1919
88902-X23 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	1	2	2	2	2 2
	A	19	2	2	2	2 2
88902-X24 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 4
	B	19	19	2	2	2 2
	A	19	19	2	2	2 2
88902-X25 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 19
	D	2	2	2	2	2 19
	C	2	2	2	2	2 19
	B	2	2	2	2	2 19
	A	2	2	2	2	2 19

mat'l code				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com	
lfr	ecr no.	dr	date	linear	0.X ±0.3	COPY			
AC					0.XX ±0.13	projection	title		
					.XXX ±.051		METRAL SIGNAL HEADER		
				angles	0° ±2°	MM	1 MOD, 5 ROW PRESS-FIT		
				dr	T.BRUNGARD 11/19/99	scale	product family		
				enrg	M.STRAWSER 11/19/99	1:1	METRAL		
				chr	M.STRAWSER 11/19/99		size		
				appd	M.STRAWSER 02/29/00		dwg no		
sheet	revision						A 88902		
index	sheet						213		
							3		

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X26 SEE NOTE 11 FOR LEAD FREE	E	1	2	2	2	2	1
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	1	2	2	2	2	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X27 SEE NOTE 11 FOR LEAD FREE	E	5	5	5	1	1	1
	D	5	5	5	1	1	1
	C	5	5	5	1	1	1
	B	5	5	5	1	1	1
	A	5	5	5	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X28 SEE NOTE 11 FOR LEAD FREE	E	19	2	19	2	2	1
	D	2	19	2	19	19	2
	C	19	2	19	2	2	19
	B	2	19	2	19	19	2
	A	19	2	19	2	2	19

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X29 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2	2
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	1	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X30 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2	4
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X31 SEE NOTE 11 FOR LEAD FREE	E	4	2	3	3	2	4
	D	4	2	3	3	2	4
	C	4	2	3	3	2	4
	B	4	2	3	3	2	4
	A	4	2	3	3	2	4



mat'l code				tolerances unless otherwise specified		CUSTOMER	
lfr	ecn no.	dr	date	linear	0.X ±0.3	projection	
AC					0.XX ±0.13		
					.XXX ±.051		
				angles	0° ±2°		title METRAL SIGNAL HEADER 1 MOD, 5 ROW PRESS-FIT
				dr	T.BRUNGARD 11/19/99		
				enrg	M.STRAWSER 11/19/99		
				chr	M.STRAWSER 11/19/99	product family METRAL	code 213
				appd	M.STRAWSER 02/29/00		
sheet index	revision sheet					scale 1:1	size A
							dwg no 88902
							sheet 4

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru