


PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5736910 5939955 6425781 6428361 6554638 6840817 7123117
7429195 7717749 7808751 6217391 6149050 7924130

MECHANICAL:

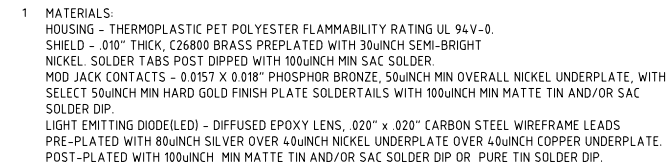

 RJ45 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUB PART F.

 A3 MAGNETICS

- IMPEDANCE: 100 OHMS
- TURNS RATIO (CHIP: CABLE): TX = 1:1, RX = 1:1
- OPEN CIRCUIT INDUCTANCE (OCL): 350uH MIN @100kHz, 0.1VRMS, 8mA DC BIAS FROM 0°C TO 70°C, TX AND RX
- PERFORMANCE @ 25°C:

RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 30MHz
18-20LOG(f/30)dB MIN FROM 30.1MHz TO 60MHz
12dB MIN FROM 60.1MHz TO 80MHz
CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
33-20LOG(f/50)dB MIN FROM 40.1MHz TO 100MHz

COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
-ISOLATION VOLTAGE: 2250VDC (MAX) FOR 60 SECONDS WITH A RISE TIME OF 500V/SEC. FOR
6-6605728-15-6605728-2,5-6605728-6,5-6605728-8,5-6605728-9,
6-6605728-1,6-6605728-2
1500VAC (MAX) AT 60Hz FOR 60 SECS. FOR
6605728-2,6605728-9,1-6605728-1

4. OPERATING TEMPERATURE: FROM 0°C TO +70°C

 THE 250 OHM LED RESISTORS ARE OPTIONAL, PLEASE SEE CHART FOR PRESENCE OR ABSENCE OF LED RESISTORS. IF THE LED WITHOUT 250 OHM RESISTORS, LED IS DRIVEN WITH CONSTANT CURRENT AT APPROX 20mA.LED COLOR:

DOMINANT WAVELENGTH (AD): GREEN 568 nm TYP. @ Vf=20mA
FORWARD VOLTAGE (VF): GREEN 2.2V TYP. @ If=20mA
DOMINANT WAVELENGTH (AD): YELLOW 588 nm TYP. @ Vf=20mA
FORWARD VOLTAGE (VF): YELLOW 2.1V TYP. @ If=20mA
DOMINANT WAVELENGTH (AD): ORANGE 605 nm TYP. @ Vf=20mA
FORWARD VOLTAGE (VF): YELLOW 2.1V TYP. @ If=20mA
IF THE LED WITH 250 OHM RESISTORS, LED IS DRIVEN WITH 5V VCC
IS 20mA LED COLOR:
DOMINANT WAVELENGTH (AD): GREEN 568 nm TYP. @ Vf=5V
FORWARD CURRENT (IF): GREEN 12 mA TYP. @ Vf=5V
DOMINANT WAVELENGTH (AD): YELLOW 588 nm TYP. @ Vf=5V
FORWARD CURRENT (IF): YELLOW 13 mA TYP. @ Vf=5V

△6 INDICATED CONNECTIONS ARE FOR NIC CONFIGURATION. THE MAGNETICS ARE ASYMMETRICAL AND DO NOT SUPPORT AUTO-MDI/MDIX.

△ TRP CONNECTOR LOGO, PART NUMBER, DATE CODE, COUNTRY OF ORIGIN AND AGENCY APPROVAL MARKING IN APPROXIMATE LOCATION SHOWN.

8. THESE PARTS ARE RECOMMENDED FOR WAVE SOLDERING PROCESS,PREHEAT TEMPERATURE IS 120°C TO 160°C. 120 SECONDS TO 180 SECONDS PEAK WAVE SOLDERING TEMPERATURE IS 260°C MAX 10 SECONDS MAX.

9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		 	
KESSLER'S FACTORY		 trp CONNECTOR a longman	
DIMENSION: 100-2100 INCHES		3. ATTACH 2 DUCKS 4. FAROLE 1000000000 5. FAROLE 1000000000 6. FAROLE 1000000000 7. FAROLE 1000000000 8. FAROLE 1000000000 9. FAROLE 1000000000 10. FAROLE 1000000000 11. FAROLE 1000000000 12. FAROLE 1000000000 13. FAROLE 1000000000 14. FAROLE 1000000000 15. FAROLE 1000000000 16. FAROLE 1000000000 17. FAROLE 1000000000 18. FAROLE 1000000000 19. FAROLE 1000000000 20. FAROLE 1000000000 21. FAROLE 1000000000 22. FAROLE 1000000000 23. FAROLE 1000000000 24. FAROLE 1000000000 25. FAROLE 1000000000 26. FAROLE 1000000000 27. FAROLE 1000000000 28. FAROLE 1000000000 29. FAROLE 1000000000 30. FAROLE 1000000000 31. FAROLE 1000000000 32. FAROLE 1000000000 33. FAROLE 1000000000 34. FAROLE 1000000000 35. FAROLE 1000000000 36. FAROLE 1000000000 37. FAROLE 1000000000 38. FAROLE 1000000000 39. FAROLE 1000000000 40. FAROLE 1000000000 41. FAROLE 1000000000 42. FAROLE 1000000000 43. FAROLE 1000000000 44. FAROLE 1000000000 45. FAROLE 1000000000 46. FAROLE 1000000000 47. FAROLE 1000000000 48. FAROLE 1000000000 49. FAROLE 1000000000 50. FAROLE 1000000000 51. FAROLE 1000000000 52. FAROLE 1000000000 53. FAROLE 1000000000 54. FAROLE 1000000000 55. FAROLE 1000000000 56. FAROLE 1000000000 57. FAROLE 1000000000 58. FAROLE 1000000000 59. FAROLE 1000000000 60. FAROLE 1000000000 61. FAROLE 1000000000 62. FAROLE 1000000000 63. FAROLE 1000000000 64. FAROLE 1000000000 65. FAROLE 1000000000 66. FAROLE 1000000000 67. FAROLE 1000000000 68. FAROLE 1000000000 69. FAROLE 1000000000 70. FAROLE 1000000000 71. FAROLE 1000000000 72. FAROLE 1000000000 73. FAROLE 1000000000 74. FAROLE 1000000000 75. FAROLE 1000000000 76. FAROLE 1000000000 77. FAROLE 1000000000 78. FAROLE 1000000000 79. FAROLE 1000000000 80. FAROLE 1000000000 81. FAROLE 1000000000 82. FAROLE 1000000000 83. FAROLE 1000000000 84. FAROLE 1000000000 85. FAROLE 1000000000 86. FAROLE 1000000000 87. FAROLE 1000000000 88. FAROLE 1000000000 89. FAROLE 1000000000 90. FAROLE 1000000000 91. FAROLE 1000000000 92. FAROLE 1000000000 93. FAROLE 1000000000 94. FAROLE 1000000000 95. FAROLE 1000000000 96. FAROLE 1000000000 97. FAROLE 1000000000 98. FAROLE 1000000000 99. FAROLE 1000000000 100. FAROLE 1000000000 101. FAROLE 1000000000 102. FAROLE 1000000000 103. FAROLE 1000000000 104. FAROLE 1000000000 105. FAROLE 1000000000 106. FAROLE 1000000000 107. FAROLE 1000000000 108. FAROLE 1000000000 109. FAROLE 1000000000 110. FAROLE 1000000000 111. FAROLE 1000000000 112. FAROLE 1000000000 113. FAROLE 1000000000 114. FAROLE 1000000000 115. FAROLE 1000000000 116. FAROLE 1000000000 117. FAROLE 1000000000 118. FAROLE 1000000000 119. FAROLE 1000000000 120. FAROLE 1000000000 121. FAROLE 1000000000 122. FAROLE 1000000000 123. FAROLE 1000000000 124. FAROLE 1000000000 125. FAROLE 1000000000 126. FAROLE 1000000000 127. FAROLE 1000000000 128. FAROLE 1000000000 129. FAROLE 1000000000 130. FAROLE 1000000000 131. FAROLE 1000000000 132. FAROLE 1000000000 133. FAROLE 1000000000 134. FAROLE 1000000000 135. FAROLE 1000000000 136. FAROLE 1000000000 137. FAROLE 1000000000 138. FAROLE 1000000000 139. FAROLE 1000000000 140. FAROLE 1000000000 141. FAROLE 1000000000 142. FAROLE 1000000000 143. FAROLE 1000000000 144. FAROLE 1000000000 145. FAROLE 1000000000 146. FAROLE 1000000000 147. FAROLE 1000000000 148. FAROLE 1000000000 149. FAROLE 1000000000 150. FAROLE 1000000000 151. FAROLE 1000000000 152. FAROLE 1000000000 153. FAROLE 1000000000 154. FAROLE 1000000000 155. FAROLE 1000000000 156. FAROLE 1000000000 157. FAROLE 1000000000 158. FAROLE 1000000000 159. FAROLE 1000000000 160. FAROLE 1000000000 161. FAROLE 1000000000 162. FAROLE 1000000000 163. FAROLE 1000000000 164. FAROLE 1000000000 165. FAROLE 1000000000 166. FAROLE 1000000000 167. FAROLE 1000000000 168. FAROLE 1000000000 169. FAROLE 1000000000 170. FAROLE 1000000000 171. FAROLE 1000000000 172. FAROLE 1000000000 173. FAROLE 1000000000 174. FAROLE 1000000000 175. FAROLE 1000000000 176. FAROLE 1000000000 177. FAROLE 1000000000 178. FAROLE 1000000000 179. FAROLE 1000000000 180. FAROLE 1000000000 181. FAROLE 1000000000 182. FAROLE 1000000000	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru