

# Common Mode Line Filter

ALFT-09V



RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

## FEATURES:

- Presents High Common Mode Impedance
- Enables significant noise suppression at high frequency

## APPLICATIONS:

- Filtering common mode noise in USB, IEEE1394, LVDS, Digital Camera, Scanner.
- Digital audio and video equipments such as PDA, DSC, DVC, DVD Player.

## ELECTRICAL SPECIFICATIONS:

Part Number ALFT-09V-Inductance Code	L (mH) min.	DCR Max ( $\Omega$ )	$I_r$ ( $A_{rms}$ )
ALFT-09V-501	0.5	0.2	1.4
ALFT-09V-102	1.0	0.4	1.0
ALFT-09V-202	2.0	0.8	0.7
ALFT-09V-502	5.0	1.6	0.5
ALFT-09V-802	8.0	2.5	0.4
ALFT-09V-103	10.0	3.6	0.3

### Test Conditions

Hipot: 1500V<sub>RMS</sub>/60Hz/3mA/3sec

I<sub>r</sub>: Based on temperature rise at 40°C max


### Operating Temperature

-40°C to +125°C


### Storage Temperature

-40°C to +125°C

Common Mode  
Measuring circuit :




Differential Mode  
Measuring circuit :




## ELECTRICAL CHARACTERISTICS:


ALFT-09V-501




ALFT-09V-202



ALFT-09V-102



ALFT-09V-103



# Common Mode Line Filter







16.5 x 11.5 x 17.0mm


ALFT-09V



RoHS/RoHS II Compliant

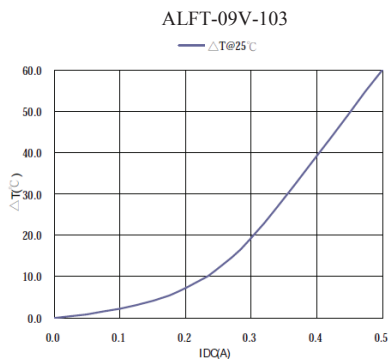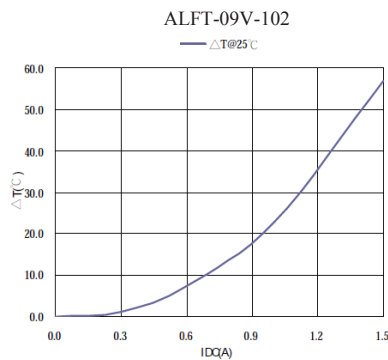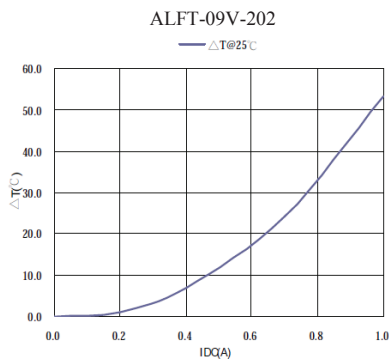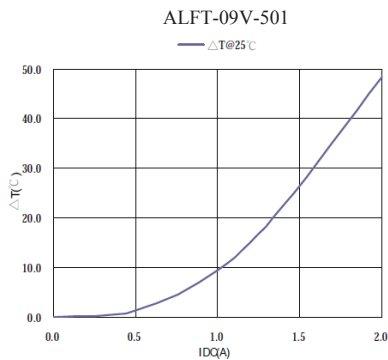


## OUTLINE DRAWING:

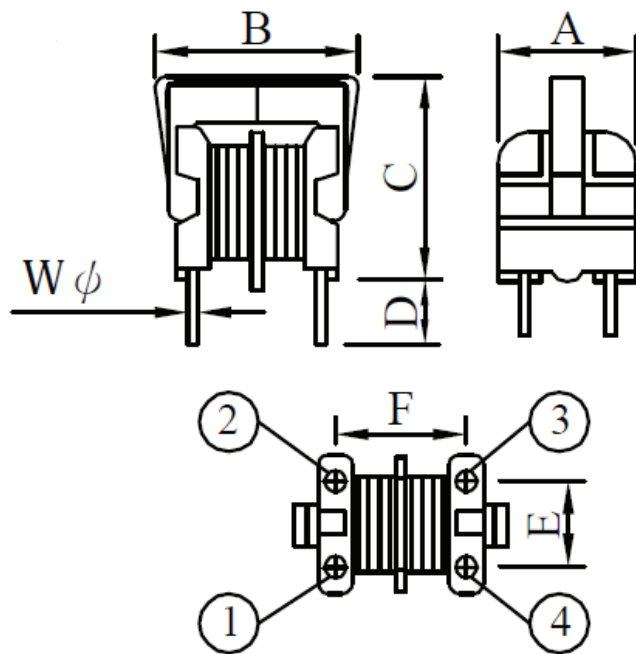

A	B	C	D	E	F	WΦ
11.5 max	16.5 max	17.0 max	5.0 ±1.0	7.0 ±0.5	8.0 ±0.5	0.6 ±0.05

Dimensions: mm

ABRACON IS  
ISO 9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)


Revised: 01.02.14

# Common Mode Line Filter

ALFT-09V




RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

## SCHEMATICS

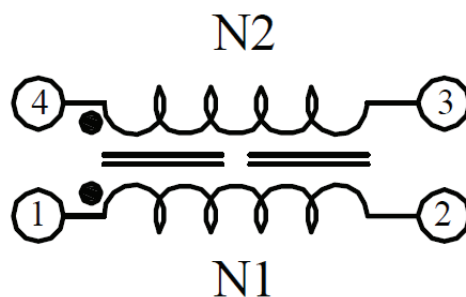

Packing 288pcs/Box

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 01.02.14

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)