MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
112TW1-70 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

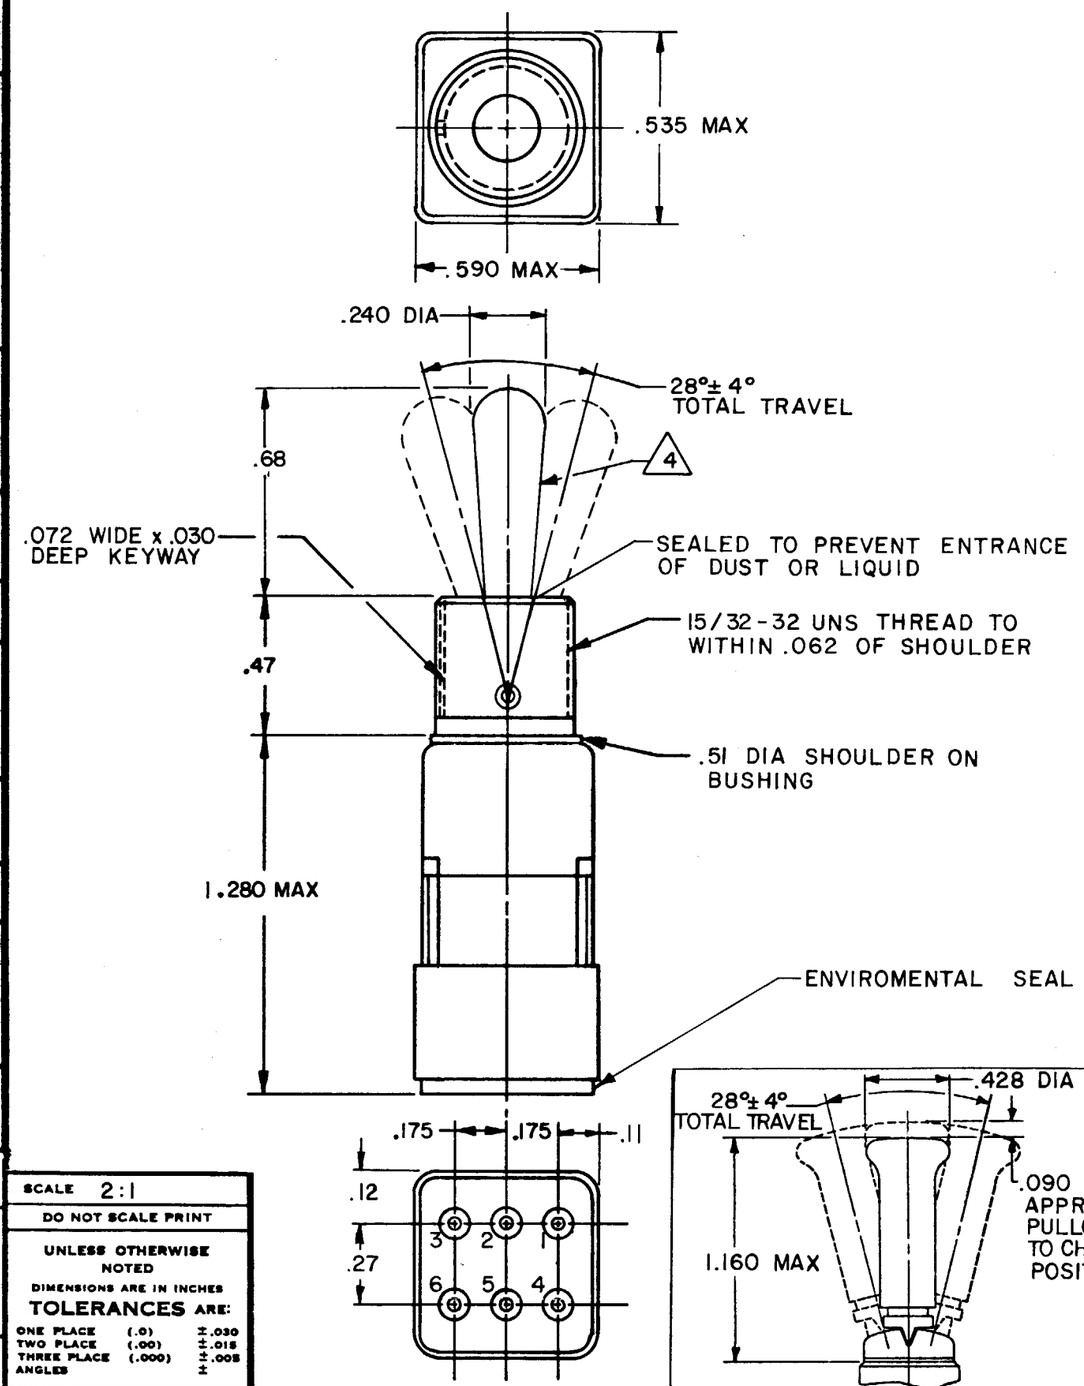

	CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	ELECTRICAL DATA
	112 TW-70		1	28 VDC & 125 VAC 5 AMP RES 2 AMP IND 1 AMP LAMP
	112 TW-70	E, L, N	2	

"A" (5) LOCKED IN THREE POSITIONS	"B" (5) LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" (5) LOCKED OUT OF CENTER POSITION	"E" (5) LOCKED IN CENTER POSITION	"F" (5) LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" (5) LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" (5) LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" (5) LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" (5) LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" (5) LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" (5) LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" (5) LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" (5) LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
		
MOMENTARY POSITION	MAINTAINED POSITION	MOMENTARY POSITION

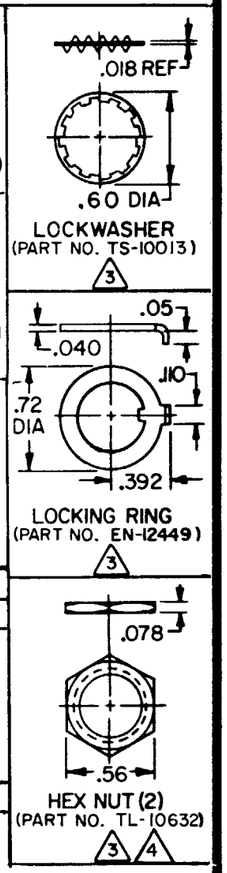

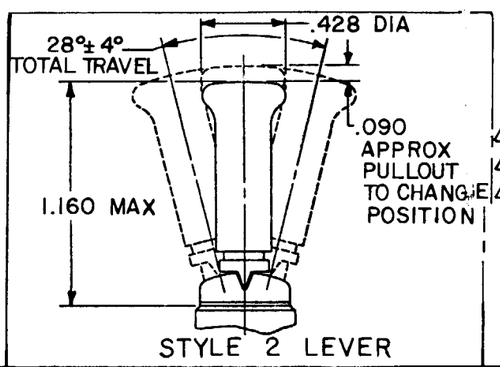

NOTES
1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101 -
2 - SWITCH DESIGNED TO CONFORM TO MS 277 021 EXCEPT TERMINATION LENGTH AND WEIGHT
3 FURNISHED UNASSEMBLED
4 MATTE FINISH
5 SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING

SCALE 2:1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

112TW1-70 SERIES CHART 1 | DRAWING NUMBER M | RELEASE NO. PR-7564 | REPLACES

ISSUE X X 7

REVISIONS

A	CO 50565	TMM 12 DEC 81	
B	CO 53417	WJM 27 JUL 83	
C	CO54350	KJS 31 MAR 84	
D	CO 55602	WJM 5 JUL 84	
E	DWG OBS CO73348	CSL 18 SEP 92	
F	RE-INS PR-21152	DAW 24 MAY 94	

21 DEC 78 | GLH | CHECK | 78 | 19 DEC 78 | S J B | DRAWN | FO-52851

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
112TW1-70 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

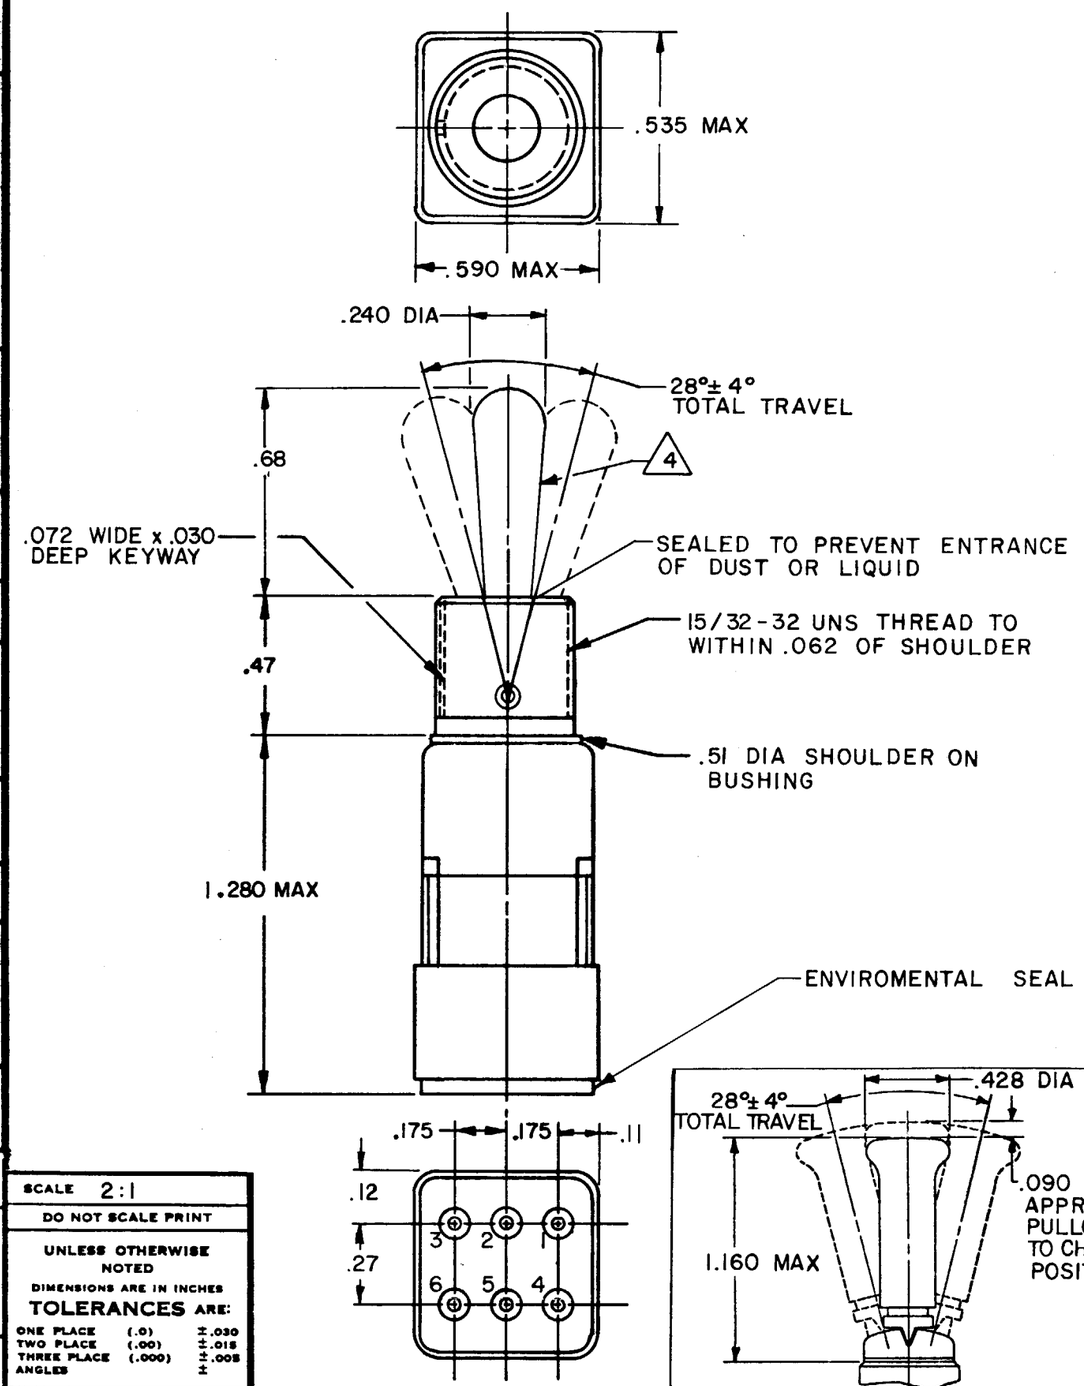

	CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERING DETAILS	STYLE NUMBER	ELECTRICAL DATA
	112 TW-70		1	28 VDC & 125 VAC 5 AMP RES 2 AMP IND 1 AMP LAMP
	112 TW-70	E, L, N	2	

"A" (5) LOCKED IN THREE POSITIONS	"B" (5) LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" (5) LOCKED OUT OF CENTER POSITION	"E" (5) LOCKED IN CENTER POSITION	"F" (5) LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" (5) LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" (5) LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" (5) LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" (5) LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" (5) LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" (5) LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" (5) LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" (5) LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
		
MOMENTARY POSITION	MAINTAINED POSITION	MOMENTARY POSITION

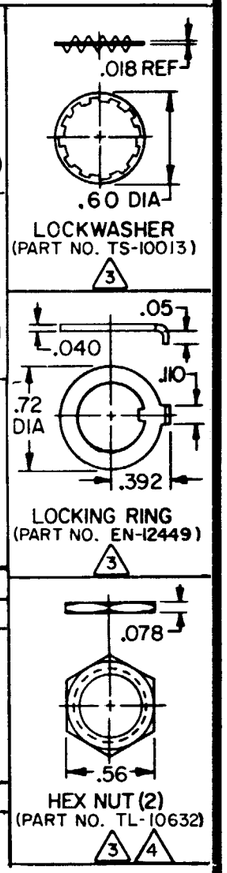

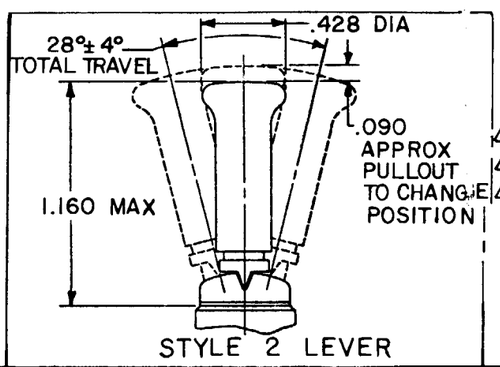

NOTES
1 - TERMINATION WILL ACCEPT CRIMP CONTACT CONFORMING TO M39029/1-101 -
2 - SWITCH DESIGNED TO CONFORM TO MS 277 021 EXCEPT TERMINATION LENGTH AND WEIGHT
3 FURNISHED UNASSEMBLED
4 MATTE FINISH
5 SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING

SCALE 2:1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

112TW1-70 SERIES CHART 1 | DRAWING NUMBER M | RELEASE NO. PR-7564 | REPLACES

ISSUE X X 7

REVISIONS

A	CO 50565	TMM 12 DEC 81	
B	CO 53417	WJM 27 JUL 83	
C	CO54350	KJS 31 MAR 84	
D	CO 55602	WJM 5 JUL 84	
E	DWG OBS CO73348	CSL 18 SEP 92	
F	RE-INS PR-21152	DAW 24 MAY 94	

21 DEC 78 | GLH | CHECK | 78 | 19 DEC 78 | S J B | DRAWN | FO-52851

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru