

PLUG: WG 50 PR9 SY
RECEPTACLE: WG 50 SAD11 SY
XX XX XXXXX XX

PLUG

RECEPTACLE

SERIES	
WG	Plug, right angle, with mounting ears
WG	Receptacle, straight, with mounting ears
WG	Receptacle, right angle, with mounting ears
SIZE	
XX	Number of contacts (50, 62, 80, 92, or 104)
XX	Number of contacts (50, 62, 80, 92, or 104)
CONTACTS	

- The contact type determines image of connector. Pin, right angle contacts are always plug image. Straight pin contacts or socket contacts are receptacle image.

TYPE CONTACTS/TERMINATIONS:

PR7 Pin, right angle, dip solder, .109" x .025" dia
PR9 Pin, right angle, dip solder, .140" x .025" dia
PR11 Pin, right angle, dip solder, .172" x .025" dia
PR15 Pin, right angle, dip solder, .234" x .025" dia
PRW34 Pin, right angle, wire wrap[®], .531"
PRW42 Pin, right angle, wire wrap[®], .656"

TYPE CONTACTS/TERMINATIONS:

SAC Socket, straight, solder cup (.035" I.D.)
SAD7 Socket, straight, dip solder, .109" x .027" dia
SAD9 Socket, straight, dip solder, .140" x .027" dia
SAD11 Socket, straight, dip solder, .172" x .027" dia
SAF3 Socket, straight, flex circuit, .050"
SAF6 Socket, straight, flex circuit, .093"
SAF9 Socket, straight, flex circuit, .140"
SAG7 Socket, straight, dip solder, .109" x .018" dia
SAG9 Socket, straight, dip solder, .140" x .018" dia
SAG11 Socket, straight, dip solder, .172" x .018" dia
SAP Socket, straight, pin termination .150", connector saver
SAW24 Socket, straight, wire wrap[®], .375"
SAW40 Socket, straight, wire wrap[®], .625"
SOR7 Socket, right angle, dip solder, .109" x .025" dia
SOR9 Socket, right angle, dip solder, .140" x .025" dia
SOR11 Socket, right angle, dip solder, .172" x .025" dia

HARDWARE


- Plug facial seal gaskets and hoods; order separately or add "Q" in part number. Example: WG50PR9QJ.
See "Gaskets" and "Hoods" in Accessories section for instructions.

SY	Guide set	SY	Guide set
SY-#	Guide set, polarized	SY-#	Guide set, polarized
SYL	Guide set, long	SYL	Guide set, long
JT	Turning jackset, .435"	J	Fixed jackset
JTA	Turning jackset, .135"	JL	Fixed jackset, long
JTB	Hex turning jackset, .135"		
JTC	Hex turning jackset, .435"		
JTL	Turning jackset, long, .635"		

OPTIONS

- Option Codes: Add to the end of the part number. Example: WG80PR9SY342. Call factory for additional codes.
- 342 Remove mounting ears. (.250" each end)
- 548 Bond #4-40 small pattern nut into mounting holes (for right angle plug connectors only).
- B82 Termination face sealed against conformal coating
- D01 Pretinned contact terminations (except solder cups, wire wraps[®] and flex contacts) with 63/37 or 60/40 solder. ☒
- P39 Pretinned contact terminations (except solder cups, wire wraps[®] and flex contacts) with SAC305 solder (lead free).
- D54 Combine -B82 & -D01 options
- G69 Solder cups fixed in an outward orientation (otherwise contacts will rotate)

☒ = Option not RoHS compliant

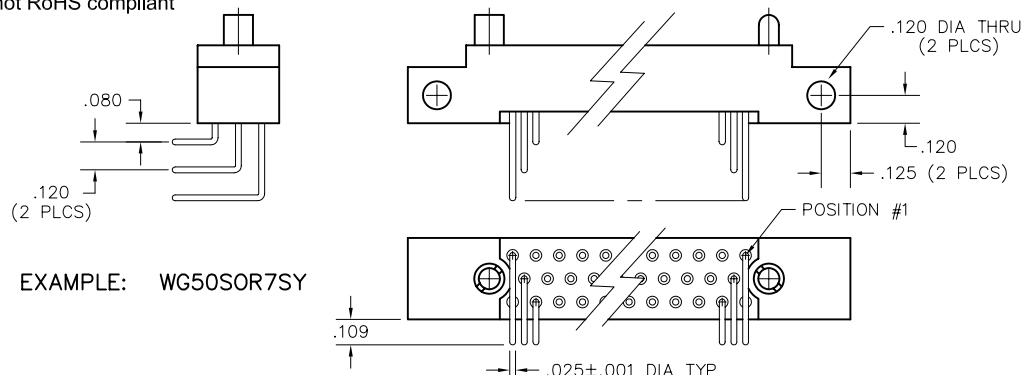

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru