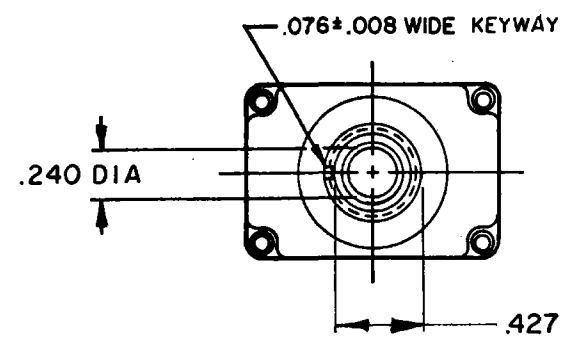



SWITCH-TOGGLE

CATALOG LISTING
2TL11-50 SERIES
CHART 1


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.










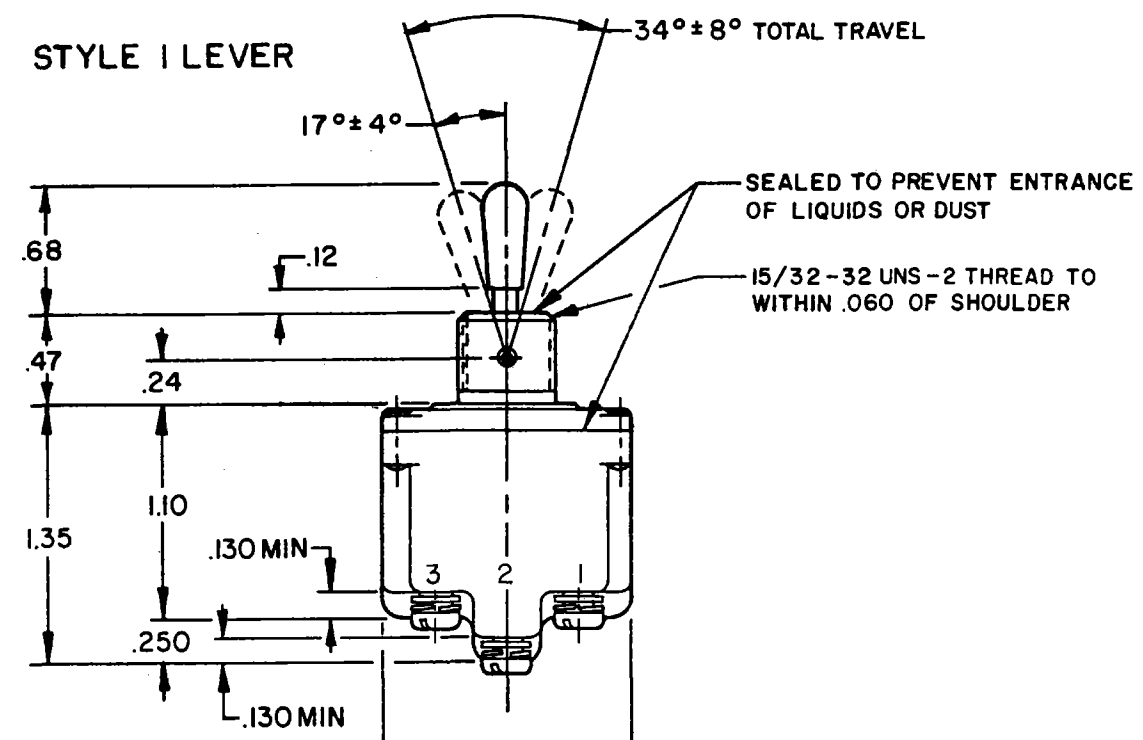
STYLE 1 LEVER




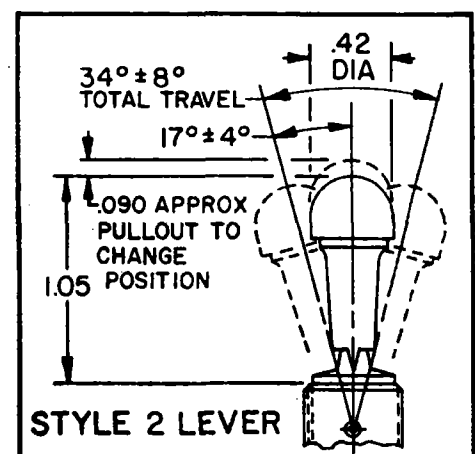6-32 UNC X .250 REF PAN HEAD TERMINAL SCREW WITH SPRING LOCKWASHER AND WASHER (SEMS) ONE PER TERMINAL (3)




STYLE 2 LEVER


CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS)								
			RESISTIVE LOAD					LAMP LOAD	INDUCTIVE LOAD		
			DC VOLTS		AC VOLTS						
			28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
	2TL11-50	NONE	1								
	2TL11-50 	E, F, K, L, M, N	2	18	.75	.5	11	6	5	.2	10 8
"A"  	"B"  	"D"  	"E"  	"F"  	 LOCKWASHER   LOCKING RING   HEX NUT (2) 						
LOCKED IN THREE POSITIONS	LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	LOCKED OUT OF CENTER POSITION	LOCKED IN CENTER POSITION	LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)							
"G"  	"H"  	"J"  	"K"  	"L"  							
LOCKED IN EXTREME POSITION (KEYWAY SIDE)	LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)							
"M"  	"N"  	"P"  									
LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)									
CIRCUIT MADE WITH TOGGLE LEVER IN											
KEYWAY SIDE			CENTER			OPPOSITE KEYWAY					
											
MOMENTARY POSITION			MAINTAINED POSITION			MAINTAINED POSITION					



LOCKWASHER



LOCKING RING



HEX NUT (2)

- NOTES**
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - POLE, CIRCUIT DESIGNATION, AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - (3) FURNISHED UNASSEMBLED
 - 4 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA8
 - (5) KEYWAY SHOWN ON LEFT SIDE
 - (6) SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS

CATALOG LISTING
2TL11-50 SERIES CHART 1
PAGE 1 OF 1
RELEASE NO. CO-78465
REPLACES 2TL11-50 SERIES
ISSUE **3**
REVISIONS
A 50 78465 47
SAD 22 AUG 94
B 0003011
KRB 05 FEB 04
CHECK 06 FEB 04
MDM
CHECK 23 JUN 04
KAG
CHECK 10 JUN 94
KDR
DRAWN
SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.01) H .030
TWO PLACE (.00) H .015
THREE PLACE (.000) H .005
ANGLES
WEIGHT .15 LB APPROX

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru