


PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION
1855527-1	B	122500-1	LEADMAKER	POST FEED	CUTS CARRIER
1855527-2	B	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER
1855527-3	B	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER
1855527-6	B	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER
7-1855527-7	B	-	-	-	SPARE PARTS


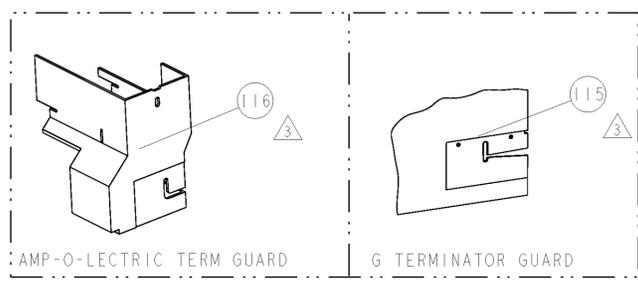


TE PN		TE TERMINAL - TE CRIMP SPECS		
1987984	-	CRIMP HEIGHT		
-	-	WIRE SIZE		REF SETTING
-	-	2.39mm+ .05/- .05 [.094+ .002/- .002]	10AWG or 6mm2	A6
-	-	1.88mm+ .05/- .05 [.074+ .002/- .002]	12AWG or 4mm2	D6
-	-	-	-	-
-	-	CRIMP	SIZE	TYPE
-	-	WIRE	3.05mm [.120]	F
-	-	STABL	3.05mm [.120]	O
-	-	INSUL	6.60mm [.260]	O
-	-	FEED	16.00	Ø 4.35 - Ø 6.4
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS	SET UP GAGE
3.81-7.62	114-18022	16.00	408-8040	458637-1


LOC	REV	DATE	BY	CHK	DESCRIPTION
A	66				
	2	01OCT2009	BK	GB	REVISED DURING FTB
	3	19NOV2009	BH	BH	PRE BUILD CHANGES
	A	30MAR2010	BH	BH	RELEASED
	B	26APR2010	LG	GB	ECR-10-008779

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

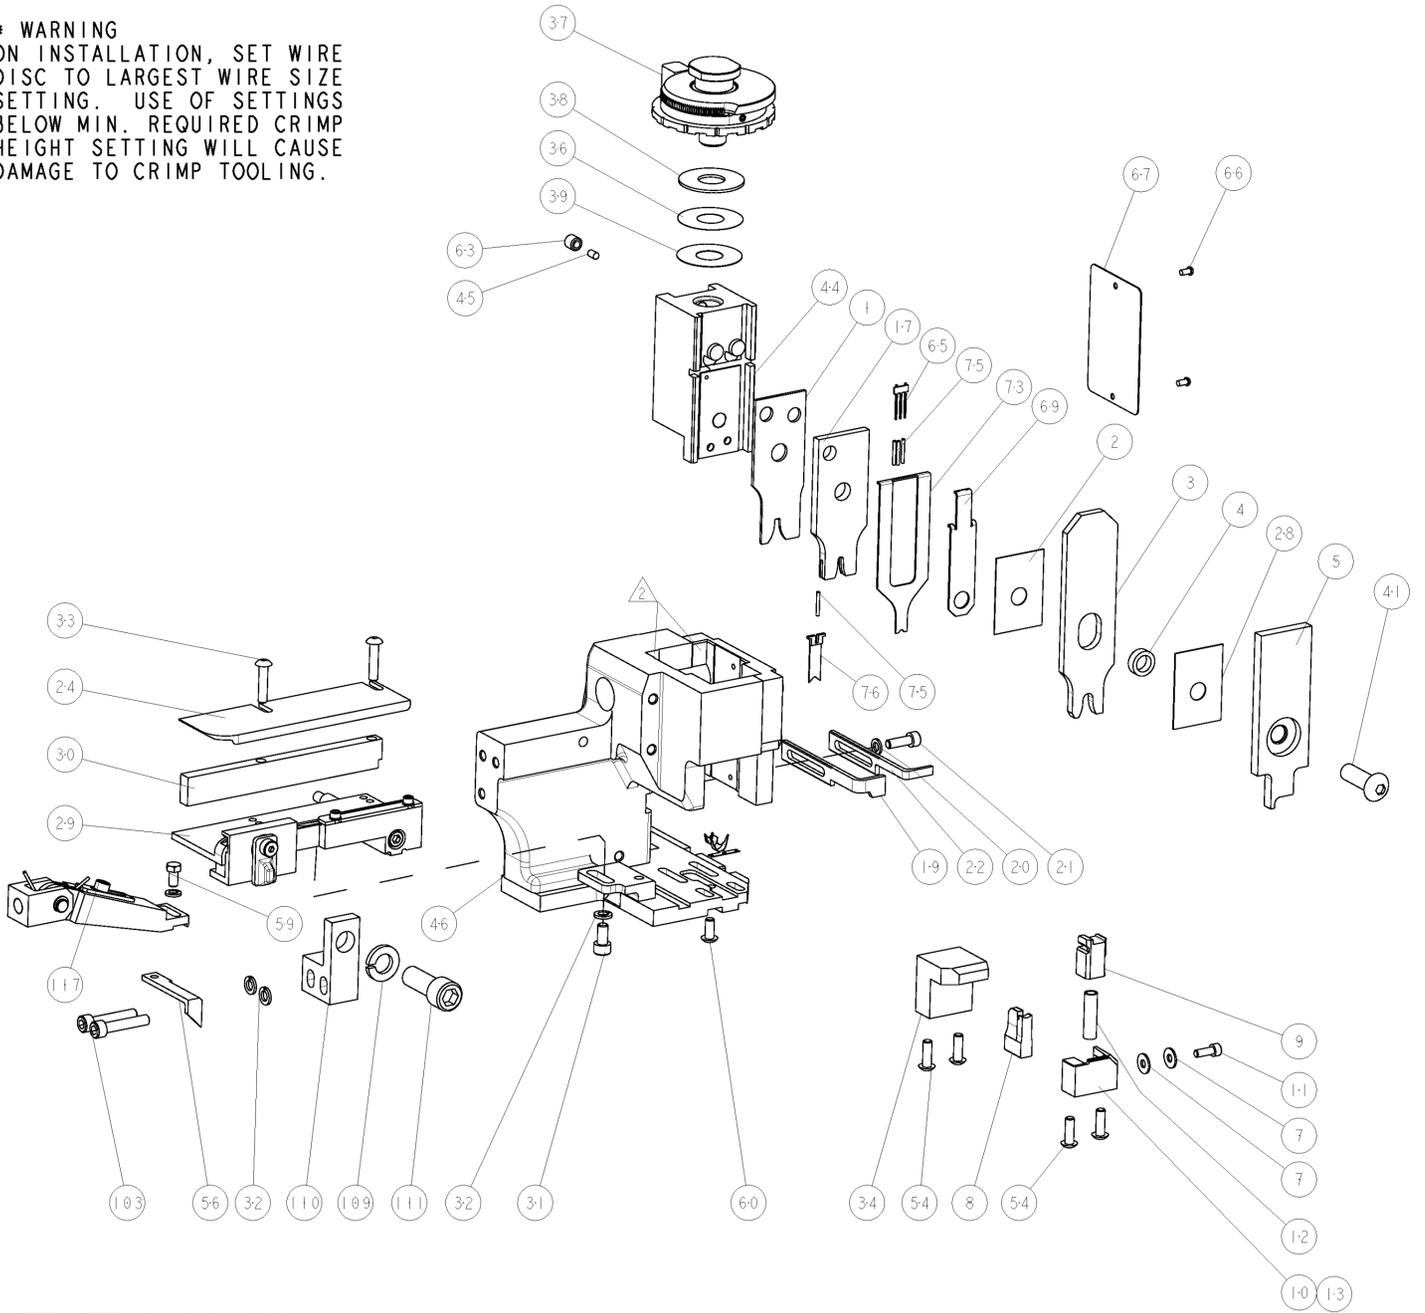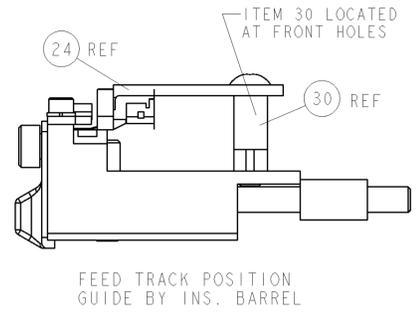

ITEM NO	QTY	DESCRIPTION	ITEM NO	
1	1	461062-1	FEED FINGER ASSEMBLY	117
2	1	455749-1	GUARD WINDOW	116
3	1	679532-1	INSERT, GUARD	115
4	1	3-21001-5	SCR, SKT HD CAP 3/8-16 X 1.000	111
5	1	459610-1	MOUNT, FEED BRACKET	110
6	1	21024-8	WASHER, SPRG LOCK, REG 3/8	109
7	1	692655-7	AIR FEED VALVE ASSEMBLY	108
8	1	692655-5	AIR FEED VALVE ASSEMBLY	105
9	1	461065-1	ASSEMBLY, AIR FEED	104
10	2	3-21000-9	SCR, SKT HD CAP 10-32 X 1.000	103
11	1	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
12	1	1338469-2	DEPRESSOR, WIRE	76
13	4	2-23147-2	SPRING, COMPRESSION	75
14	1	1490525-2	DEPRESSOR, WIRE	73
15	1	4088040	SF APPL INST 408-8040	72
16	1	217238-1	GENERAL INSTRUCTION PKG	71
17	1	1490524-2	DEPRESSOR, SPACER	69
18	1	461264-5	PLATE, IDENTIFICATION	67
19	2	21017-2	SCREW, DRIVE	66
20	1	1424350-1	HOLDER, PIN, WIRED	65
21	1	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
22	1	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
23	1	2-22603-0	SCREW, MACH, HEX HD, 8-32 X .312	59
24	1	458537-2	PAWL, FEED	56
25	4	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
26	1	690602-6	CAM, PRE FEED, 1 5/8	49
27	1	690602-5	CAM, PRE FEED, 1 1/8	48
28	1	690501-4	CAM, POST-FEED 1 5/8	47
29	1	2-1633399-0	APPL. BASIC AIR FEED SUB ASSY	46
30	1	690191-1	PLUG, NYLON	45
31	1	2-819307-9	RAM, SIDE FEED	44
32	1	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
33	1	690125-1	SHIM SUB-ASSY	39
34	1	1-469367-1	SHIM	38
35	1	879103-3	FINE ADJUST HEAD ASSEMBLY	37
36	1	469367-2	SHIM	36
37	1	1633912-1	WIRE STOP	34
38	2	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
39	3	21024-5	WASHER, SPRG LOCK, REG NO 10	32
40	1	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
41	1	1320908-3	SPACER, STRIP GUIDE	30
42	1	1633091-1	ASSEMBLY, STRIP GUIDE	29
43	1	455888-4	SPACER, CRIMPER	28
44	1	1320928-1	PLATE, STRIP GUIDE	24
45	1	690472-2	STRIPPER	22
46	1	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
47	2	21024-4	WASHER, SPRG LOCK, REG NO 8	20
48	1	691353-1	STRIPPER	19
49	1	1633872-1	CRIMPER, WIRE O	17
50	1	679625-2	SHEAR HOLDER, FRONT (NO CUT)	13
51	1	3-22280-3	SPRING, COMPRESSION	12
52	1	1-21000-9	SCR, SKT HD CAP 6-32 X .375	11
53	1	1-690459-0	SHEAR HOLDER, FRONT	10
54	1	454276-5	FLOATING SHEAR, FRONT	9
55	1	1633913-1	ANVIL, COMBINATION	8
56	2	21055-5	WASHER, FLAT, REG NO 6	7
57	1	3-455889-8	DEPRESSOR, SHEAR	5
58	1	238011-1	BLOCK, CRIMPER SPACER	4
59	1	3-456135-4	CRIMPER, INSULATION O PREMIUM	3
60	1	455888-3	SPACER, CRIMPER	2
61	1	3-1752057-3	CRIMPER, WIRE PREMIUM, STEPPED	1

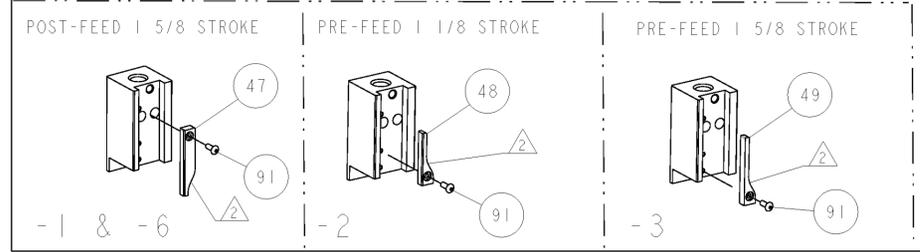

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN: STAKEM 16JUL2009		Tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
1 PLC	± .01	2 PLC	± .005	3 PLC	± .001	4 PLC	± .0001
FINISH				APVD: N. DEMING 16JUL2009		NAME: FINE ADJUST SIDE FEED HDM APPLICATOR	
MATERIAL				WEIGHT		SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO	
-				-		A 00779 C=1855527	
CUSTOMER ACCESSIBLE PRODUCTION DRAWING				SCALE: 3:5		SHEET 1 OF 1 REV B	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru