MIL-DTL-38999 Series III Type Connectors

233-341 USB 2.0 Type A receptacle to size 22D crimp removable contacts

RJ45/USB SUPER SEAL™

Glenair

C

Plug Front View

Jam Nut Receptacle Front View

Square Flange Receptacle Rear View

How to Order									
Sample Part Number	**233-341**	**NF**	**00**	**-15**	**2**	**A**	**N**	**H**	**T**

Basic Number	**233-341**
Finish[1]	See Material and Finishes table[1]
Connector Style[1]	See connector style table
Shell Size	**15**
RJ45 Category	**2** = USB 2.0
USB Interface Type	**A** = Type A
Alternate Key Position[1]	**A, B, C, D, E, N** = Normal; per MIL-DTL-38999
USB Orientation	**H** = Horizontal **V** = Vertical
Shrink Boot	**T** = Shrink Boot (Omit for None)

233-341 Superceded by 233-345

Materials and Finishes[1]	
NF	Cadmium olive drab
M	Electroless nickel
MT	Nickel PTFE

Connector Style[1]	
00	Square flange receptacle with slotted holes
07	Jam nut receptacle
D0	Wall mount receptacle with slotted holes
CM	Wall mount receptacle with metric clinch nuts
G6	Plug

USB Orientation Options (Partial Views Shown)

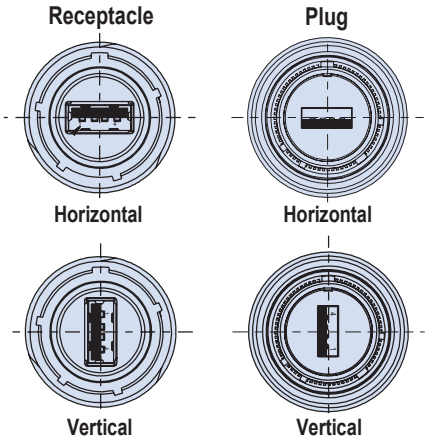

NOTES

1. See Section A for alternate key positions, panel cutout dimensions and complete material and finish options
2. Front panel mount only
3. All external dimensions, features, etc. Compliant with D38999/20, /24 & /26. Consult factory for additional information

USB 2.0 Wiring				
Pin	Name	Cable Color (USB)	Description	Recommended Wire Sizes (AWG)
1	(V Bus)	Red	+5 V	22
2	(D-)	White	Data -	28
3	(D+)	Green	Data +	28
4	(GND)	Black	Ground	22

All external dimensons, features, etc. compliant with D38999/20, /24, &/26. Consult factory for additional information.

G6 PLUG

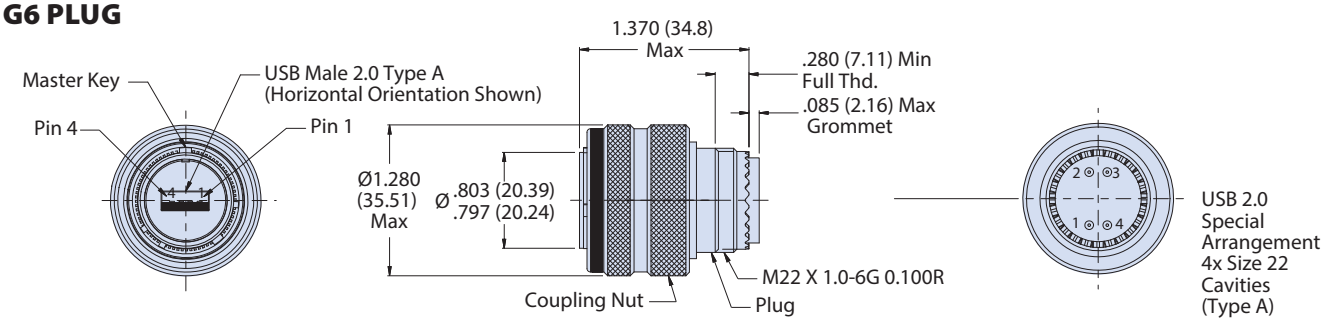

© 2016 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • SuperSeal™ Catalog
Dimensions in Inches (millimeters) are subject to change without notice.

233-341 USB 2.0 Type A receptacle to size 22D crimp removable contacts

07 - REAR PANEL MOUNT, JAM NUT RECEPTACLE WITH ACCESSORY THREADS

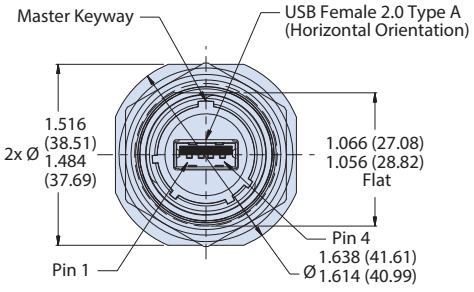

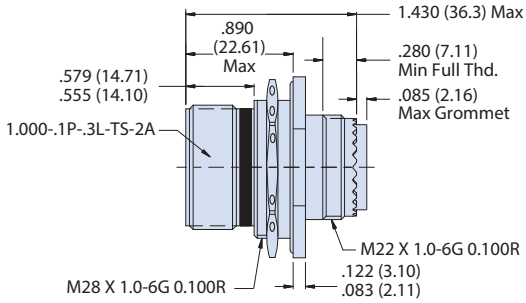



00 WALL MOUNT RECEPTACLE WITH ACCESSORY THREADS

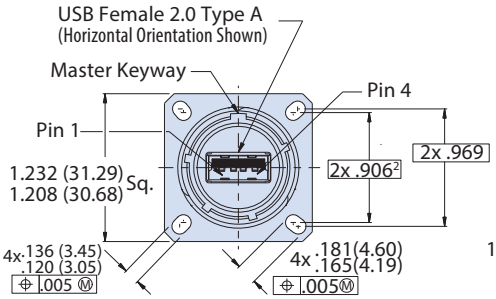

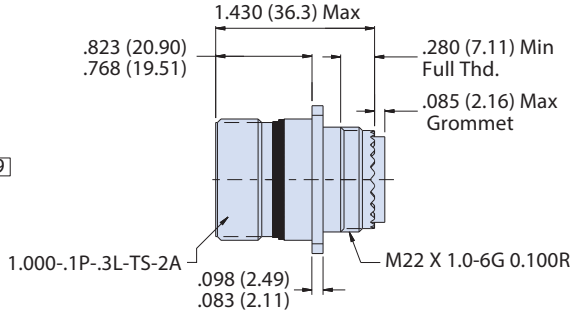



DO - WALL MOUNT RECEPTACLES WITH ACCESSORY THREADS

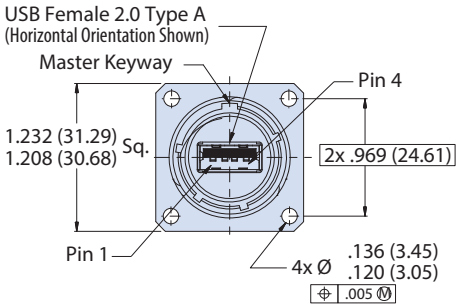

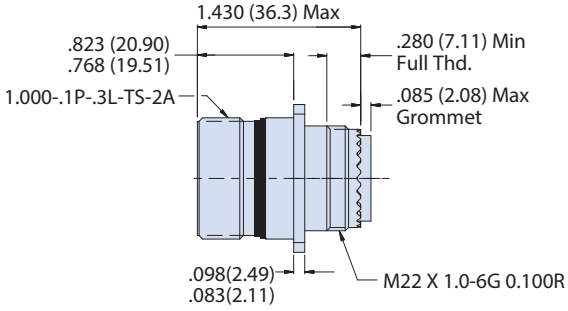



CM - WALL MOUNT RECEPTACLES WITH ACCESSORY THREADS

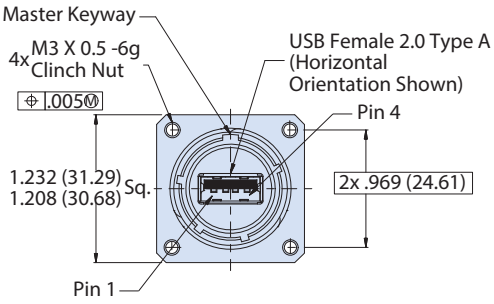

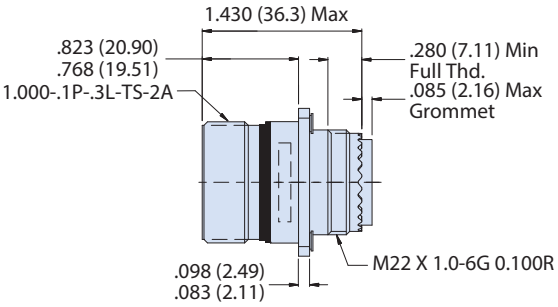



C

© 2016 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • SuperSeal™ Catalog
Dimensions in Inches (millimeters) are subject to change without notice.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru