
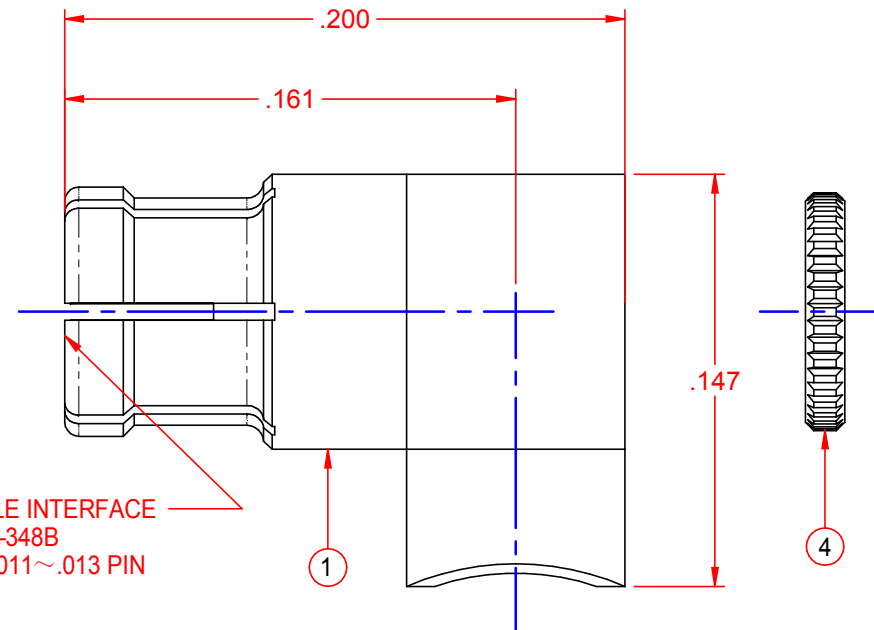
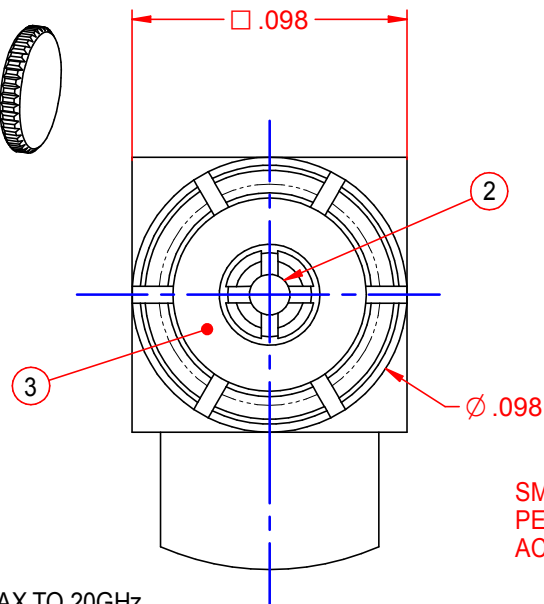


PART NUMBER	ITEM① BODY	ITEM② CONTACT	ITEM③ INSULATOR TEFLON	ITEM④ END CAP	REV	ECO	DATE
125-0692-111	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN		BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	001	ECO-16-0080	2016/06/24

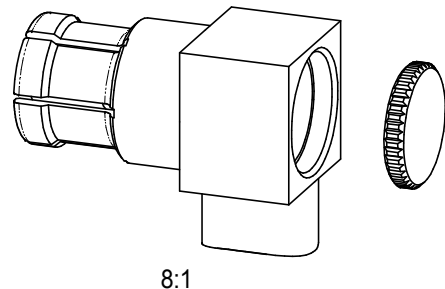

SMPM FEMALE INTERFACE
PER MIL-STD-348B
ACCEPTS Ø.011~.013 PIN

SPECIFICATION:

IMPEDANCE:50 OHMS

FREQUENCY RANGE:0-40GHz

VSWR:1.10 MAX TO 10GHz, 1.25 MAX TO 20GHz

INSERTION LOSS:0.12√F dB MAX (F IN GHz)

DIELECTRIC WITHSTANDING VOLTAGE:325 VRMS MIN AT SEA LEVEL

INSULATION RESISTANCE:5000 MEGOHM MIN

CONTACT RESISTANCE:

CENTER CONTACT - INITIAL 6 MILLIOHM MAX,AFTER ENVIRONMENTAL NOT APPLICABLE

OUTER CONTACT - INITIAL 2 MILLIOHM MAX,AFTER ENVIRONMENTAL NOT APPLICABLE

RF LEAKAGE:-80 dB TYPICAL AT 3GHz

MECHANICAL:

ENGAGEMENT FORCE:FULL DETENT(FD) 4.5LBS TYPICAL;SMOOTH BORE(SB) 2.5LBS TYPICAL

DISENGAGEMENT FORCE:FD 6.5LBS TYPICAL;SB 1.5LBS TYPICAL

CONTACT RETENTION:1.5LBS MIN AXIAL FORCE

DURABILITY:FD 100CYCLES MIN;SB 500 CYCLES MIN

ENVIRONMENTAL:

OPERATING TEMPERATURE:-65°C TO 165°C


THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B

MECHANICAL SHOCK:MIL-STD-202, METHOD 213, CONDITION I

CORROSION:MIL-STD-202, METHOD 101

VIBRATION:MIL-STD-202, METHOD 204

MOISTURE RESISTANCE:MIL-STD-202, METHOD 106, EXCEPT STEP 7B.

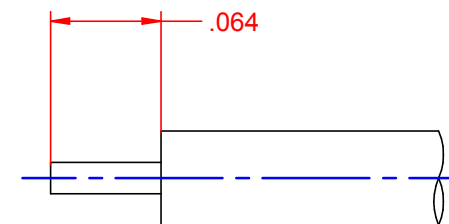

CABLE STRIP DIMENSION

This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	Model No.	125-0692-111	JOHNSON	
	RoHS2	14949	Title: SMPM FEMALE RIGHT ANGLE CABLED .047 SEMI-RIGID	
	2011/65/EU	3RD ANGLE PROJECTION	Drawing No. 125-0692-111	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	Drawn by: Eric.Dai	Rev. 001	
	.XX ±.02 .XXX ±.005 ANGLES ±2°	Date: 2016/06/24	Size A	DO NOT SCALE DRAWING
			Workmanship Std: /	Sheet 1 of 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru