

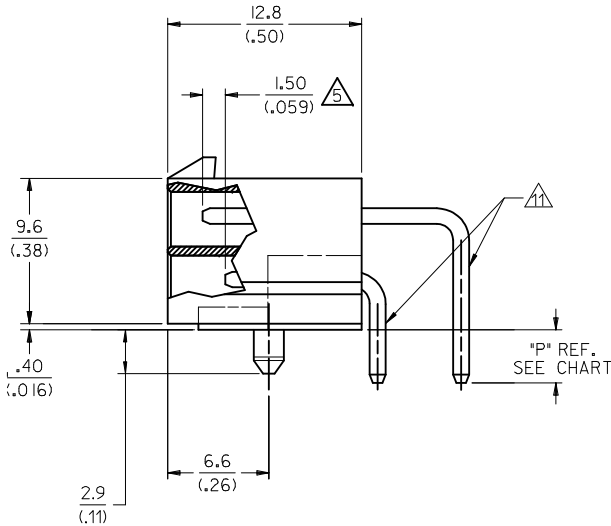
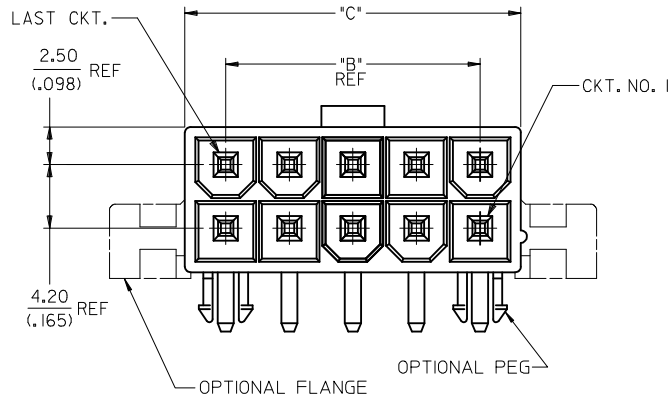


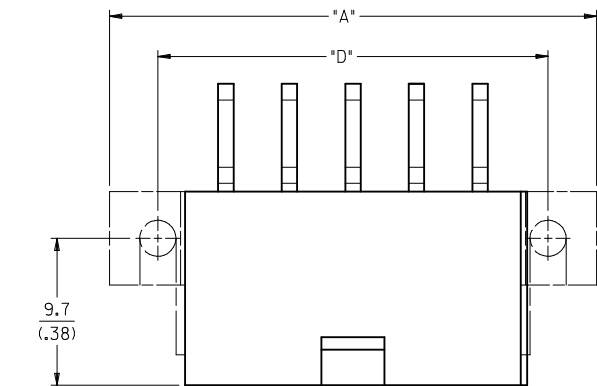

CIRCUIT SIZE	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"
2	.606 (15.40)	N.A.	.213 (5.40)	.354 (9.00)
4	.772 (19.60)	.165 (4.20)	.378 (9.60)	.520 (13.20)
6	.937 (23.80)	.331 (8.40)	.543 (13.80)	.685 (17.40)
8	1.102 (28.00)	.496 (12.60)	.709 (18.00)	.850 (21.60)
10	1.268 (32.20)	.661 (16.80)	.874 (22.20)	1.016 (25.80)
12	1.433 (36.40)	.827 (21.00)	1.039 (26.40)	1.181 (30.00)
14	1.598 (40.60)	.992 (25.20)	1.205 (30.60)	1.346 (34.20)
16	1.764 (44.80)	1.157 (29.40)	1.370 (34.80)	1.512 (38.40)
18	1.929 (49.00)	1.323 (33.60)	1.535 (39.00)	1.677 (42.60)
20	2.094 (53.20)	1.488 (37.80)	1.701 (43.20)	1.843 (46.80)
22	2.260 (57.40)	1.654 (42.00)	1.866 (47.40)	2.008 (51.00)
24	2.425 (61.60)	1.819 (46.20)	2.031 (51.60)	2.173 (55.20)



NOTES:

- 1) MATERIALS:
HOUSING MATERIAL OPTIONS: SEE CHART FOR SPECIFIC PART
NYLON (PA66), UNFILLED, UL94V-2, COLOR: NATURAL
NYLON (PA66), UNFILLED, UL94V-2, COLOR: BLACK
NYLON (PA66), UNFILLED, UL94V-0, COLOR: NATURAL
NYLON (PA66), UNFILLED, UL94V-0, COLOR: BLACK
TERMINALS: BRASS
- 2) FINISH (PLATING) OPTIONS: SEE CHART FOR SPECIFIC PART
"GS" = 0.00076/(.000030) MIN. SELECT GOLD AND
0.00254/(.0000100) SELECT MATTE TIN OVER
0.00127/(.000050) MIN. NICKEL
"MS" = 0.00254/(.000100) MIN. MATTE TIN OVER
0.00127/(.000050) MIN. NICKEL
- 3) PRODUCT SPECIFICATION: PS-5556-001
- 4) PACKAGING: SEE CHART: BULK PER PK-5569-002
TRAY PER PK-5569-003
- 5) CIRCUITS SHOWN PROVIDE THE MAKE-FIRST/BREAK-LAST FEATURE. SEE CHARTS ON SHEETS 3 & 4 FOR SPECIFIC CIRCUIT LOCATIONS.
- 6) PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
- 7) CONNECTORS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- 8) PARTS ARE NOT DESIGNED FOR CURRENT SHARING.
- 9) DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION, IF PRESENT, IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT EFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
- 10) PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
- 11) FORMING MARKS ARE ACCEPTABLE.

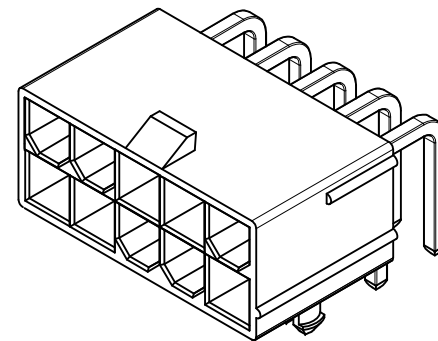



ADD -0039 EC NO: UCP2014-5058 DRWN: JDOX 2014/06/02 CHKD: JELL 2014/06/02 APPR: FSMITH 2014/06/05	REV E5	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				4 PLACES 3 PLACES 2 PLACES 1 PLACE 0 PLACE	mm	INCH	DRAWN BY POLGAR	DATE 1998/01/23	TITLE MINI-FIT JR RIGHT ANGLE HEADER ASSY CUSTOM HEADERS				
				ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.			SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-44130-001			1 OF 4	
							SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

HOUSING WITH PEGS

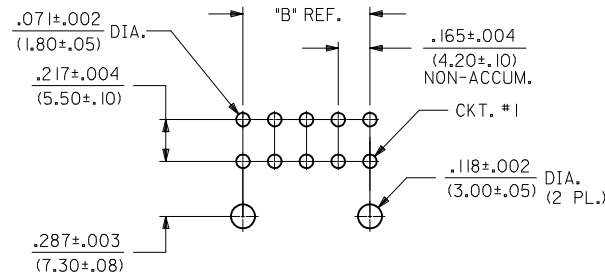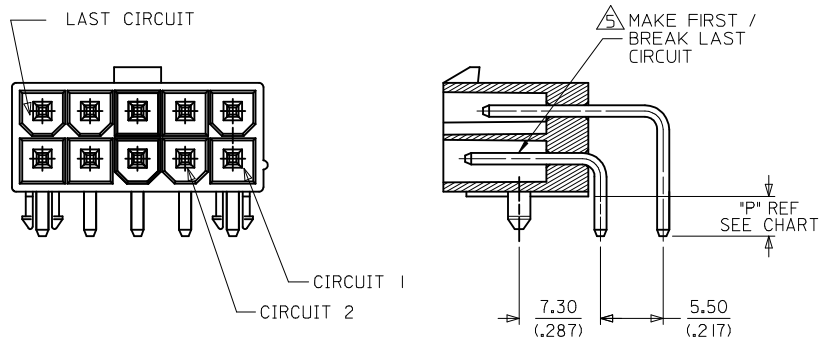

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
(PEG MOUNT)

HOUSING WITH FLANGE

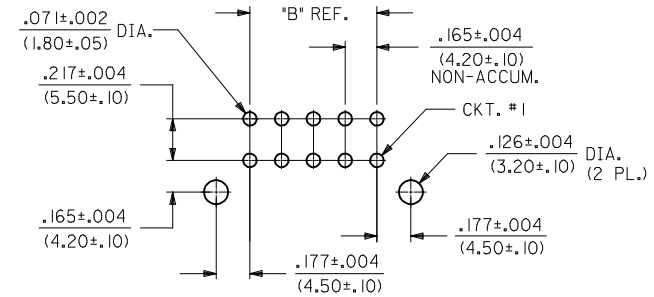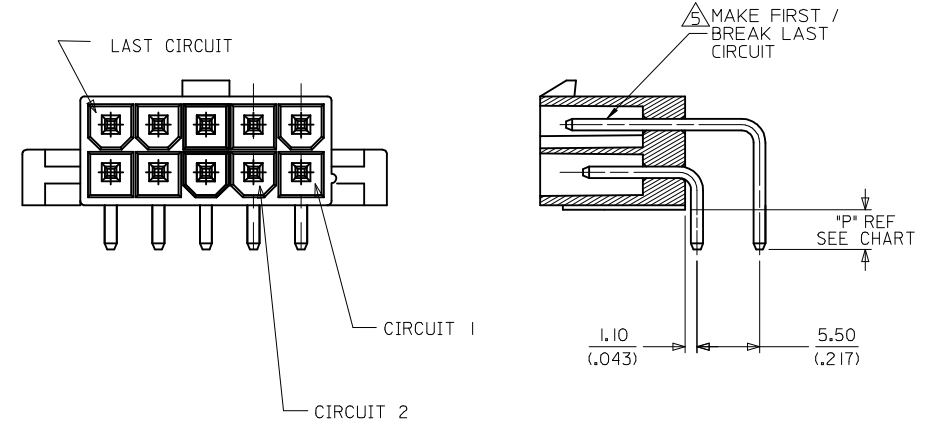

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
(FLANGE MOUNT)

SEE SHEET 1 EC NO: UCP2014-5058 DRWN: JDOX 2014/06/02 CHKD: JBELL 2014/06/02 APPR: FSMITH 2014/06/05	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
						MM/IN		4:1	METRIC			
						DRAWN BY	DATE	TITLE				
						POLGAR	1998/01/23					
						CHECKED BY	DATE					
						BANDURA	1998/01/28	MINI-FIT JR RIGHT ANGLE HEADER ASSY CUSTOM HEADERS				
						APPROVED BY	DATE					
						FSMITH	2011/05/18				molex	
						MATERIAL NO.		DOCUMENT NO.	SHEET NO.			
						SEE CHART		SD-44130-001				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

13		12		11		10		9		8		7		6		5		4		3		2		1																					
J	MATERIAL NUMBER	HOUSING MAT'L/COLOR		NO OF CKT	HOUSING OPTION	PKG	FINISH SEE NOTE #2	PIN IDENTIFICATION CODE / CIRCUIT LOCATION (SEE CHART BELOW)																V = VOID																					
								CKT 1	CKT 2	CKT 3	CKT 4	CKT 5	CKT 6	CKT 7	CKT 8	CKT 9	CKT 10	CKT 11	CKT 12	CKT 13	CKT 14	CKT 15	CKT 16	CKT 17	CKT 18	CKT 19	CKT 20	CKT 21	CKT 22	CKT 23	CKT 24														
	44130-0001	NYLON 94V-2/BLACK		06	PEG	TRAY	MS	1	1	1	1	2	1																																
	44130-0002	NYLON 94V-2/BLACK		08	PEG	TRAY	MS	2	1	1	1	1	1	1	1																														
I	44130-0003	NYLON 94V-0/BLACK		08	PEG	TRAY	MS	2	1	1	1	1	1	1	1																														
	44130-0004	NYLON 94V-0/BLACK		06	PEG	TRAY	MS	1	1	1	1	2	1																																
	44130-0006	NYLON 94V-0/NATURAL		04	PEG	BULK	MS	2	3	2	2																																		
	44130-0007	NYLON 94V-0/NATURAL		06	PEG	BULK	MS	2	1	1	2	2	2																																
H	44130-0008	NYLON 94V-0/NATURAL		10	FLANGES	BULK	MS	4	4	4	4	4	4	4	4	4	4																												
	44130-0009	NYLON 94V-0/NATURAL		06	PEG	TRAY	MS	V	1	1	2	2	2																																
	44130-0013	NYLON 94V-2/NATURAL		06	FLANGES	TRAY	MS	2	2	2	1	2	2																																
	44130-0015	NYLON 94V-2/NATURAL		24	PEG	TRAY	MS	2	2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	1														
G	44130-0017	NYLON 94V-0/BLACK		08	PEG	TRAY	MS	1	2	1	1	1	1	1	1																														
	44130-0018	NYLON 94V-0/NATURAL		02	PEG	BULK	MS	2	1																																				
	44130-0024	NYLON 94V-0/NATURAL		08	PEG	BULK	GS	2	2	5	2	2	5	2	2																														
	44130-0026	NYLON 94V-2/NATURAL		04	PEG	BULK	MS	8	8	8	8																																		
F	44130-0027	NYLON 94V-0/NATURAL		02	PEG	BULK	MS	5	5																																				
	44130-0028	NYLON 94V-0/NATURAL		04	PEG	BULK	MS	8	8	8	8																																		
	44130-0030	NYLON 94V-0/NATURAL		06	PEG	TRAY	GS	2	1	2	2	2	2																																
	44130-0031	NYLON 94V-0/NATURAL		08	PEG	BULK	MS	9	9	9	9	9	9	9																															
E		PIN ID	MATING CONFIGURATION			DIM P (PCB TAIL LENGTH)																		PIN ID	MATING CONFIGURATION			DIM P (PCB TAIL LENGTH)																	
		1	MAKE FIRST/BREAK LAST (LONGER PIN)			3.5 (.14)																		9	STANDARD MATING			8.0 (.31)																	
		2	STANDARD MATING			3.5 (.14)																																							
		3	MAKE FIRST/BREAK LAST (LONGER PIN)			4.9 (.19)																																							
		4	STANDARD MATING			6.0 (.24)																																							
		5	MAKE FIRST/BREAK LAST (LONGER PIN)			4.2 (.17)																																							
		6	STANDARD MATING			4.2 (.17)																																							
		8	STANDARD MATING			5.30 (.209)																																							
D																																													
C																																													
B																																													
A																																													

SEE SHEET 1 EC NO: UCP2014-5058 DRWN: JDOX 2014/06/02 CHKD: JBEL 2014/06/02 APPR: FSMITH 2014/06/05	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
				MM/IN		1:1	METRIC						
			▽=0	4 PLACES	± ---	± ---	DRAWN BY	DATE	MINI-FIT JR RIGHT ANGLE HEADER ASSY CUSTOM HEADERS molex				
			▽=0	3 PLACES	± ---	± .15	CHECKED BY	DATE					
			▽=0	2 PLACES	± 0.38	± ---	BANDURA	1998/01/28					
				1 PLACE	± ---	± ---	APPROVED BY	DATE					
				0 PLACE	±	±	FSMITH	2011/05/18	SD-44130-001				
			ANGULAR ±1/2°										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			E5						SEE CHART				3 OF 4
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

1b_frame_C_P_AM_T Rev. G 2012/01/11		12		11		10		9		8		7		6		5		4		3		2		1	
--	--	----	--	----	--	----	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--

[illegible]

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru