

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

JUNE ,2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

B

ECR-06-013423

19JUN06

JMS

FWK

## NOTES:

① PACK IN ACCORDANCE WITH AMP SPEC 107-3275

② 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275

③ Ag PLATING

④ Ni PLATING

⑤ THIS ITEM MUST BE WHITE

6 HAND TOOL : 9-1478240-0

7 DIE SET : 9-1478242-0

## 8 ELECTRICAL CHARACTERISTICS

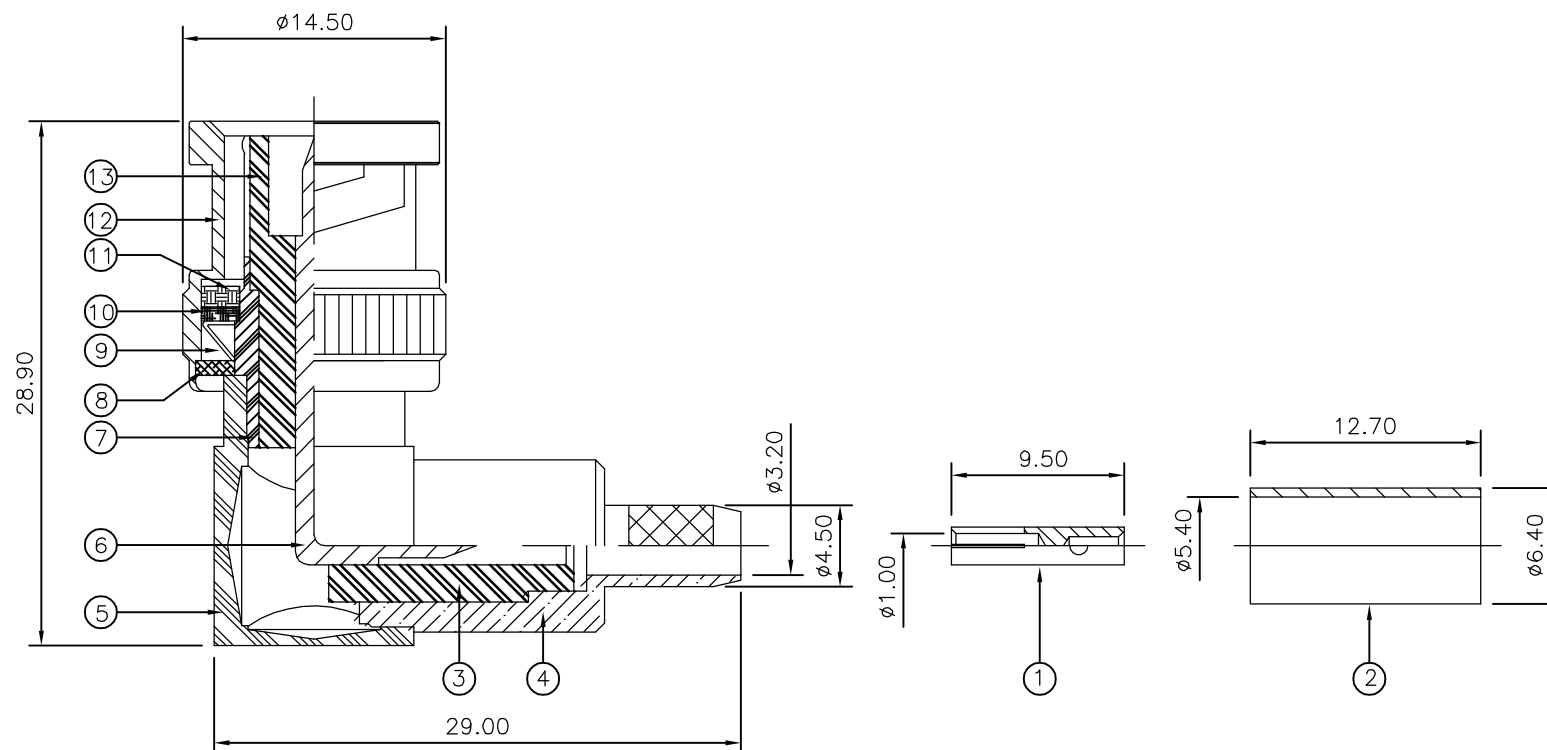


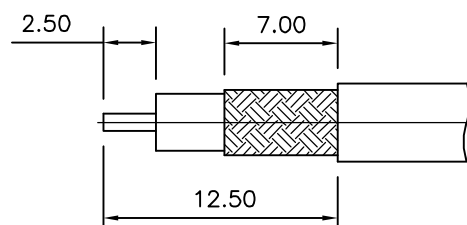
FREQUENCY RANGE: DC - 4 GHz  
NOMINAL IMPEDANCE: 50 Ohm  
INSULATION RESISTANCE: 5000 MOhm  
WORKING VOLTAGE: 500 Volts RMS at Sea Level  
DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max  
CONTACT RESISTANCE:  
CENTRE CONTACT: 1.50 mOhm Max  
OUTER CONTACT: 0.20 mOhm Max  
VSWR @ 4GHz: 1.35:1 Max  
INSERTION LOSS dB @ x 3 GHz: 0.30 Max

## 9 MECHANICAL CHARACTERISTICS


COUPLING RETENTION FORCE: 445N Min  
CABLE RETENTION FORCE: 170N Min  
DURABILITY: 500 Cycles Min

## 10 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

11 FOR TECHNICAL DATA REFER TO YOUR LOCAL  
TYCO ELECTRONICS SALES OFFICE12 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE  
ONLY UNLESS OTHERWISE STATEDRECOMMENDED  
CENTRE CONTACT  
A/F HEXRECOMMENDED  
CRIMP SLEEVE  
A/F HEXRECOMMENDED  
CABLE STRIPPING DIM'S

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm

MATERIAL

SEE TABLE

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ± -  
1 PLC ± -  
2 PLC ± -  
3 PLC ± -  
4 PLC ± -  
ANGLES ± -  
FINISH

DWN J.SANDWELL 19JUN06

CHK S.PARLOW 19JUN06

APVD F.WHEELER-KING 19JUN06

PRODUCT SPEC

APPLICATION SPEC

411-3247

WEIGHT -

CUSTOMER DRAWING

|  |  |      |      |                |              |      |
|--|--|------|------|----------------|--------------|------|
|  |  | 1    | 1    | PTFE           | INSULATION   | 13   |
|  |  | 1    | 1    | BRASS          | ③ SHELL      | 12   |
|  |  | 1    | 1    | SILICON RUBBER | ⑤ GASKET     | 11   |
|  |  | 1    | 1    | BRASS          | ④ WASHER     | 10   |
|  |  | 1    | 1    | SPRING STEEL   | ④ SPRING     | 9    |
|  |  | 1    | 1    | BRASS          | ③ WASHER     | 8    |
|  |  | 1    | 1    | BRASS          | ③ BODY 2     | 7    |
|  |  | 1    | 1    | BRASS          | ③ CONTACT II | 6    |
|  |  | 1    | 1    | BRASS          | ③ BODY 1     | 5    |
|  |  | 1    | 1    | BRASS          | ③ CHASSIS    | 4    |
|  |  | 1    | 1    | PTFE           | INSULATION   | 3    |
|  |  | 1    | 1    | BRASS          | ③ FERRULE    | 2    |
|  |  | 1    | 1    | BRASS          | ③ CONTACT I  | 1    |
|  |  | 6--0 | 1--0 | MATERIAL       | DESCRIPTION  | ITEM |

QUANTITY PER ASSY

PARTS LIST

DWN J.SANDWELL 19JUN06

CHK S.PARLOW 19JUN06

APVD F.WHEELER-KING 19JUN06

PRODUCT SPEC

APPLICATION SPEC

411-3247

WEIGHT -

CUSTOMER DRAWING

**tyco**  
**Electronics**Tyco Electronics Corporation  
Bideford EX39 4HE

NAME

BNC ELBOW PLUG CRIMP 50 OHM  
RG58C/U, 141A/U, URM43, 76, KX15

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1478075

SCALE NTS

SHEET 1 OF 1

REV B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)