

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP .2005.

© COPYRIGHT 2005 By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

—

S

REVISED PER ECR-15-016490

11NOV2015

T.Z

H.W

1 CONTACT COPLANALITY IS 0.1 MAX.

2 THIS DIMENSION MEANS CENTER OF THE POCKET.

3 M3 TAPPING + BVTP RECOMMENDED TORQUE: 68.6N (7Kgf) MAX.

4 FINISH

CONTACT: V μm MIN. Au PL. ON CONTACT AREA (V: SEE TABLE)

0.03~0.1 μm Au PL. ON TERMINAL AREA

Ni UNDER PL. ALL OVER

SHELL: Sn PL. (MATTE) ALL OVER

Ni UNDER PL. ALL OVER

5 SCREW SIZE

6 QTY PRINT ON THE LABEL. (EMBOSS PACKING)

1 コンタクトコプラナリティーは 0.1 以下。

2 本寸法はポケットの中心を表す。

3 M3 TAPPING + BVTP 推奨トルク: 68.6N (7Kgf) 以下。

4 仕上

コンタクト: コンタクトエリアに V μm 以上の 金めっき (V: 表参照)

ターミナルエリアに 0.03~0.1 μm の金めっき

ニッケル下地めっきを施す

シェル: すずめっき (つや消し)

ニッケル下地めっきを施す

5 スクリューサイズ

6 数量はラベルに印字される (EMBOSS 梱包)

0.3	—	6 70	1.9	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	SOFT TRAY (SEE SHEET 11)	6-1903015-3
0.76	M3 x 0.5	70	1.9	46	138	6-23	46	—	—	—	—	—	—	—	—	WITH TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 7)	9-1903015-4
0.3	M3 x 0.5	6 200	1.9	—	—	—	—	45.5	49.5	18.3	0.5	44	40.4	20.2	20	WITH TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	EMBOSS (SEE SHEET 6)	9-1903015-3
0.3	M3 x 0.5	70	1.9	—	—	—	—	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 10)	8-1903015-4
0.1	—	6 550	1.9	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	EMBOSS (SEE SHEET 6)	7-1903015-1
0.3	M3 x 0.5	6 200	1.9	—	—	—	—	45.5	49.5	18.3	0.5	44	40.4	20.2	20	WITHOUT TAPE	WITH FLANGE	FULL SMT	(SEE SHEET 5)	EMBOSS (SEE SHEET 6)	5-1903015-9
0.3	—	6 550	0.8	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	EMBOSS (SEE SHEET 6)	5-1903015-5
0.3	M3 x 0.5	70	1.9	46	138	6-23	46	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 7)	5-1903015-4
0.3	M3 x 0.5	6 200	1.9	—	—	—	—	45.5	49.5	18.3	0.5	44	40.4	20.2	20	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	EMBOSS (SEE SHEET 6)	5-1903015-3
-0.3	3 ø2.65±0.3	70	1.9	46	138	6-23	46	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 7)	5-1903015-2
0.3	—	6 400	1.9	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	EMBOSS (SEE SHEET 6)	5-1903015-1
0.3	M3 x 0.5	70	1.0	46	138	6-23	46	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 7)	4-1903015-1
0.76	—	6 400	1.2	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	EMBOSS (SEE SHEET 6)	2-1903015-2
0.76	M3 x 0.5	70	1.9	—	—	—	—	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 9)	1903015-8
0.76	3 ø2.65±0.3	70	1.9	—	—	—	—	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 9)	1903015-7
0.76	M3 x 0.5	50	1.9	54.4	120	4-30	54.4	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 9)	1903015-5
0.76	M3 x 0.5	70	1.9	46	138	6-23	46	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 4)	SOFT TRAY (SEE SHEET 8)	1903015-4
0.76	M3 x 0.5	6 200	1.9	—	—	—	—	45.5	49.5	18.3	0.5	44	40.4	20.2	20	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 4)	EMBOSS (SEE SHEET 6)	1903015-3
0.76	3 ø2.65±0.3	70	1.9	46	138	6-23	46	—	—	—	—	—	—	—	—	WITHOUT TAPE	WITH FLANGE	THROUGH HOLE	(SEE SHEET 3)	SOFT TRAY (SEE SHEET 7)	1903015-2
0.76	—	6 400	1.9	—	—	—	—	33.5	37.5	9.32	0.4	32	28.4	14.2	16	WITHOUT TAPE	WITHOUT FLANGE	THROUGH HOLE	(SEE SHEET 2)	EMBOSS (SEE SHEET 6)	1903015-1
V	U	T	AA	S	R	P	N	M	L	K	J	H	G	F	E	POLYIMIDE TAPE	FLANGE	SHELL TYPE	CONNECTOR	PACKING	PART NUMBER
4 Au PL.	5 SCREW SIZE	QTY	DIMENSION													PART LIST					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位： 耗
mm

MATERIAL
材料

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ±

1 PLC ±

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH
仕上

DWN
R.MURAYAMA
26SEP2005

CHK
T.KIMURA
26SEP2005

APVD
T.KIMURA
26SEP2005

PRODUCT SPEC
製品規格
108-78180-2

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

TE Connectivity

HDMI 19 POS RECEPTACLE ASSY
SMT SHORT TYPE

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A3

00779

C-1903015


—

SCALE
尺度 4:1

SHEET
1 OF 12

REV
S

1470-19 (3/11)

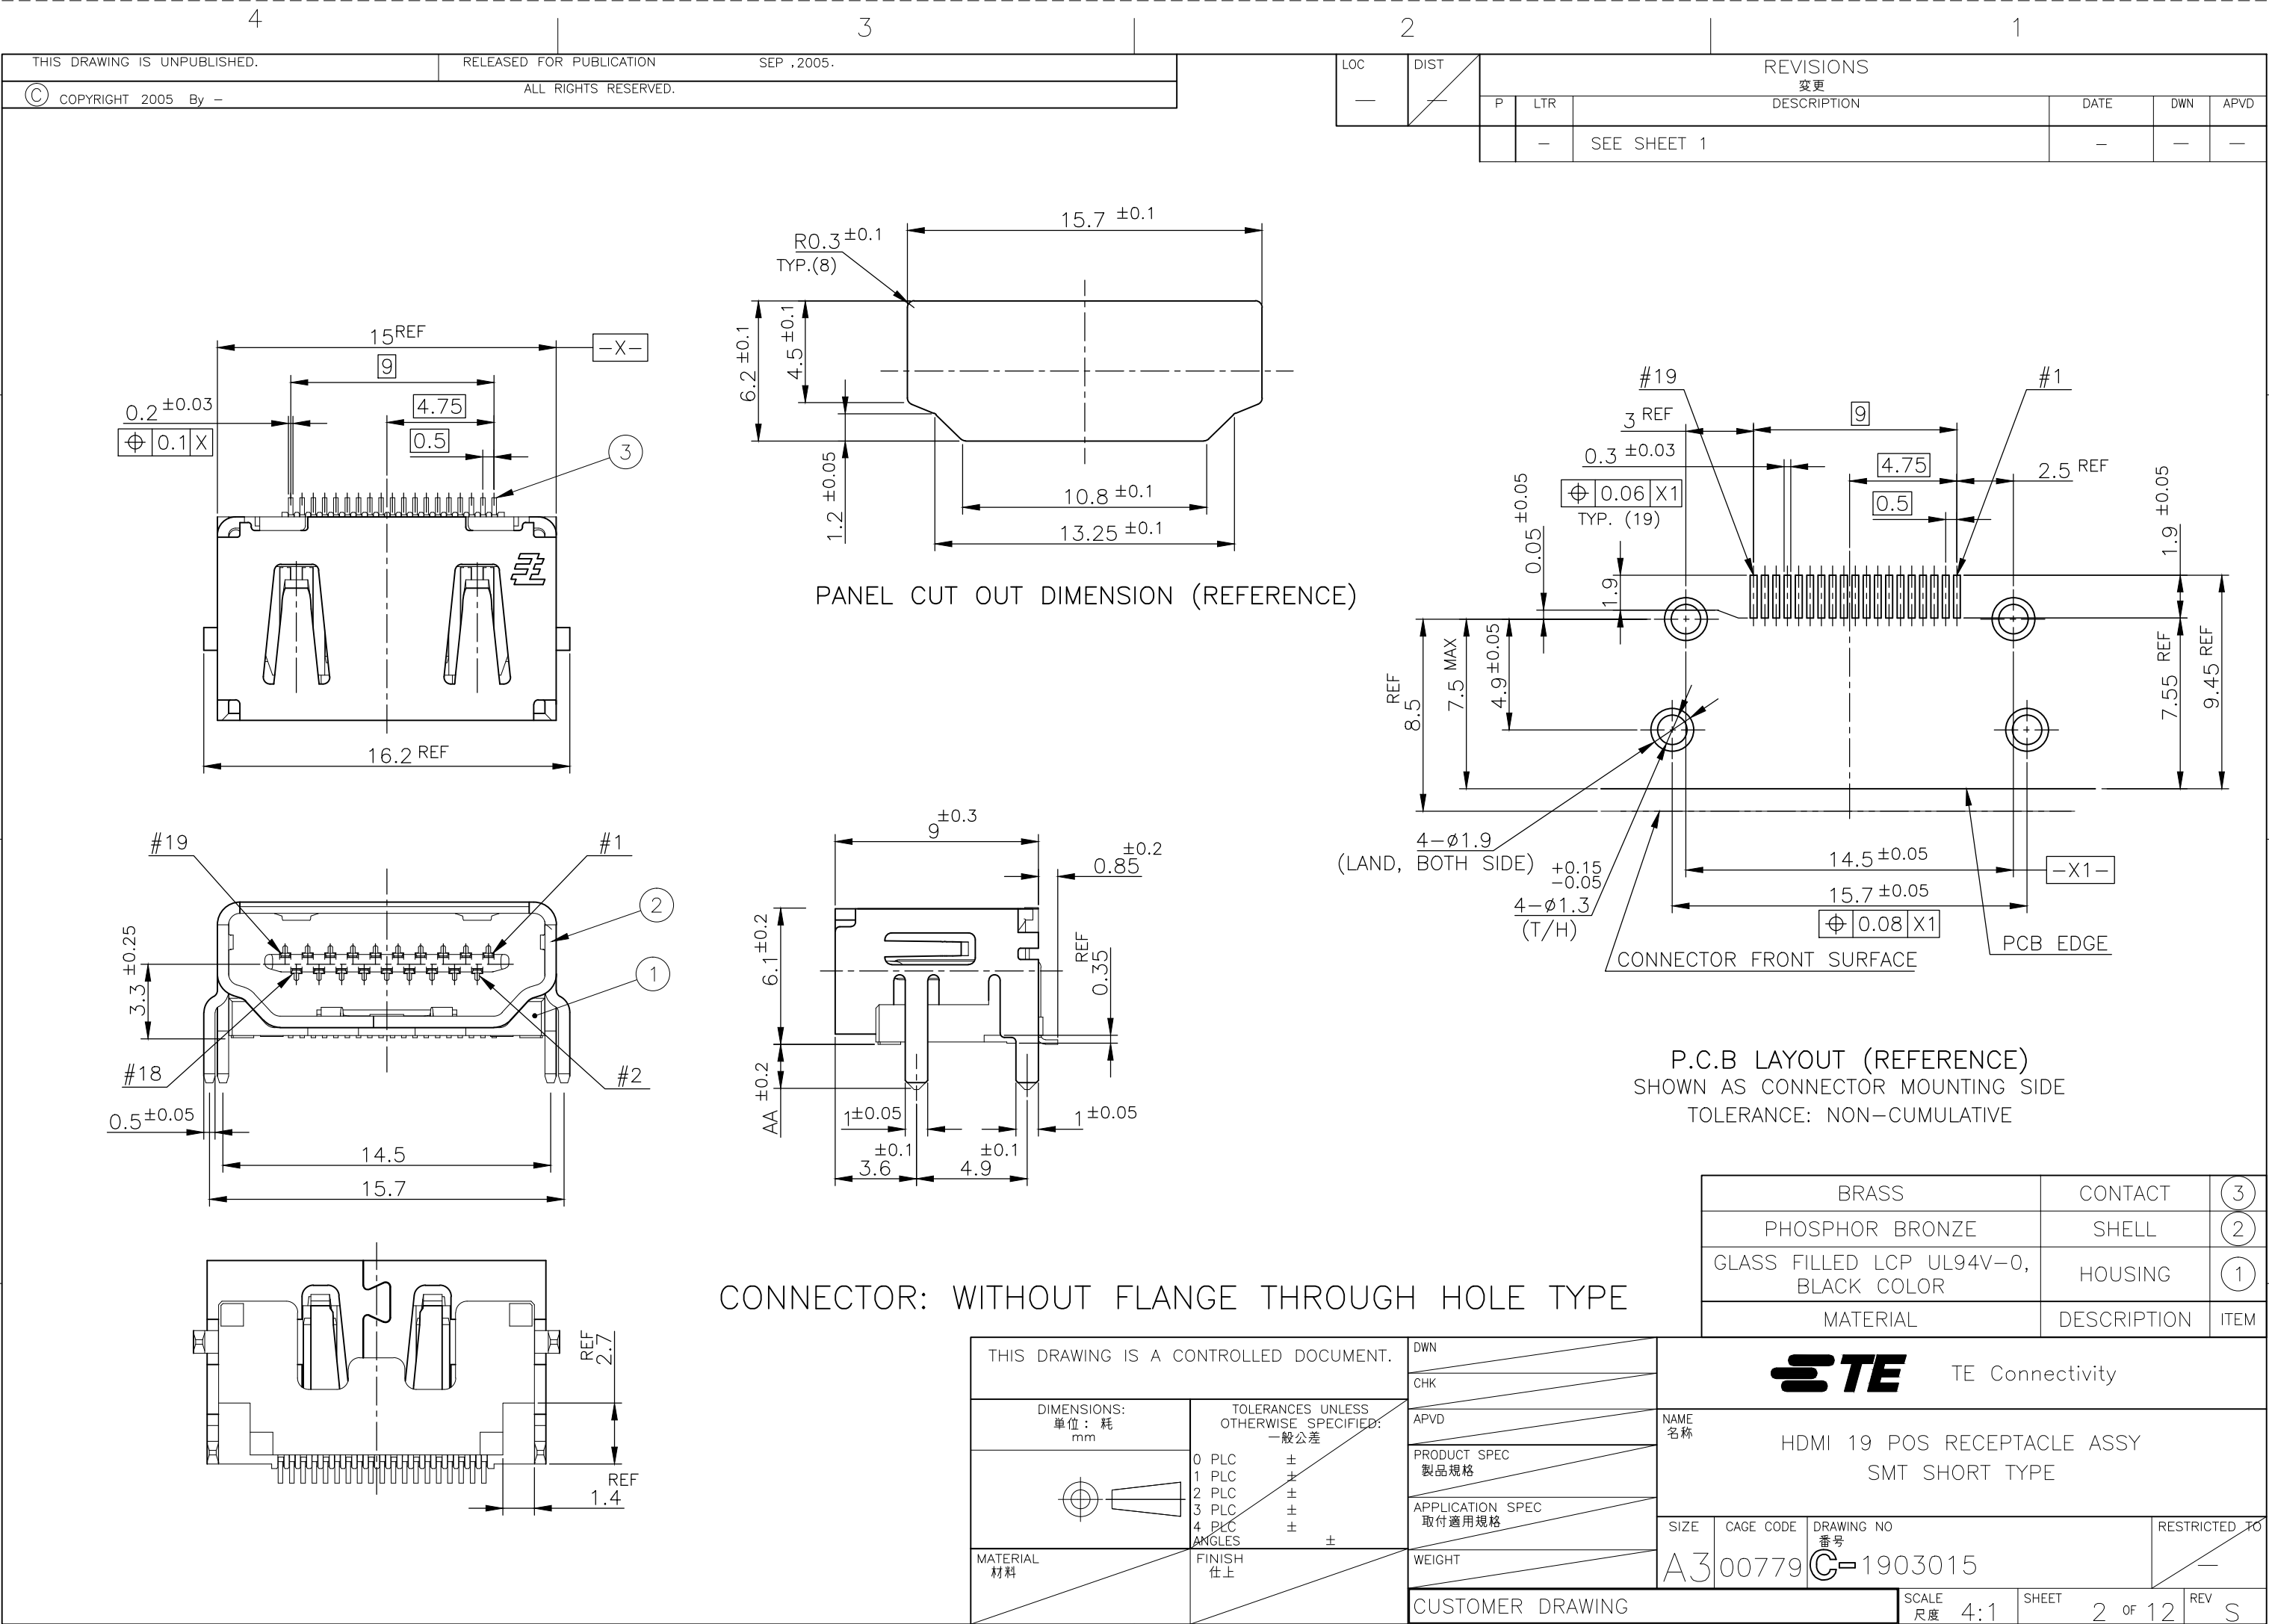

4



3

2

1



LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
-	-	-	-	SEE SHEET 1	-

D

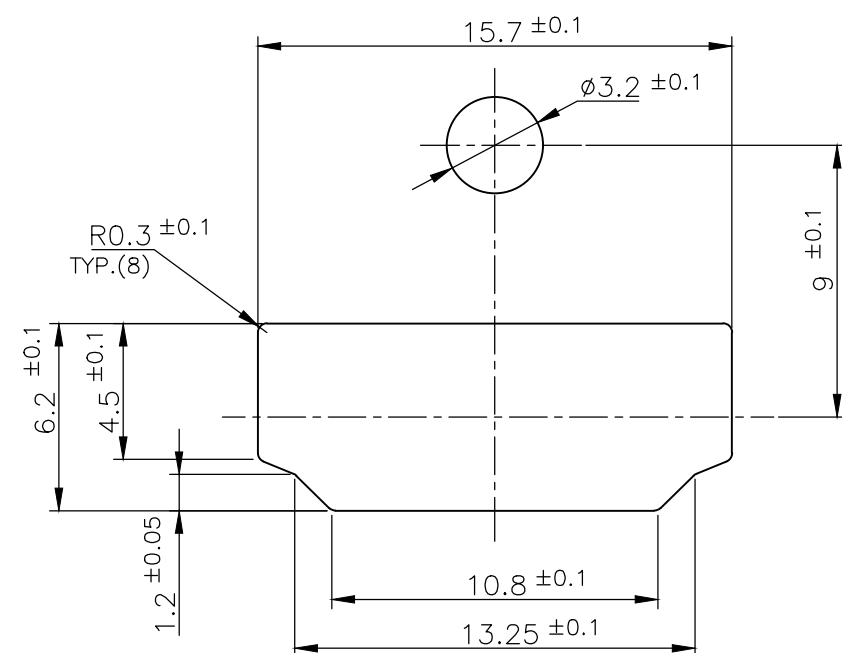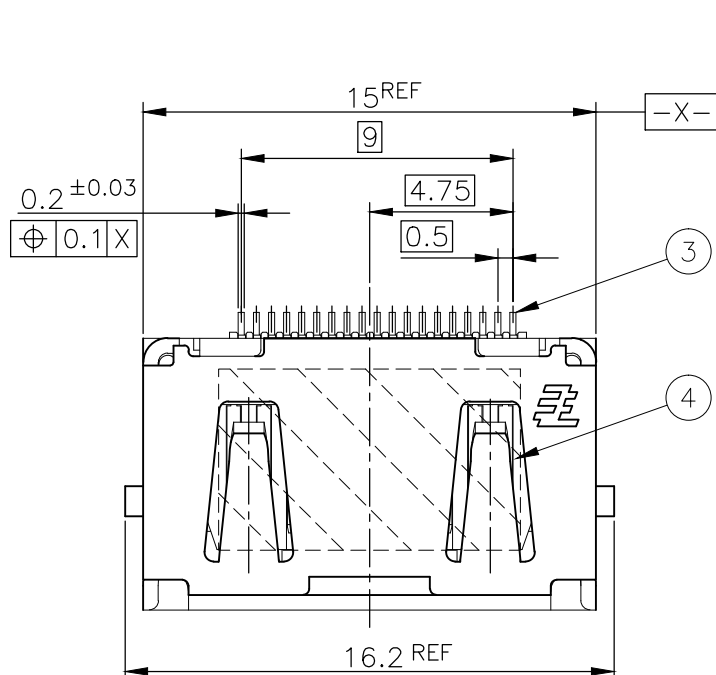


PANEL CUT OUT DIMENSION (REFERENCE)

C

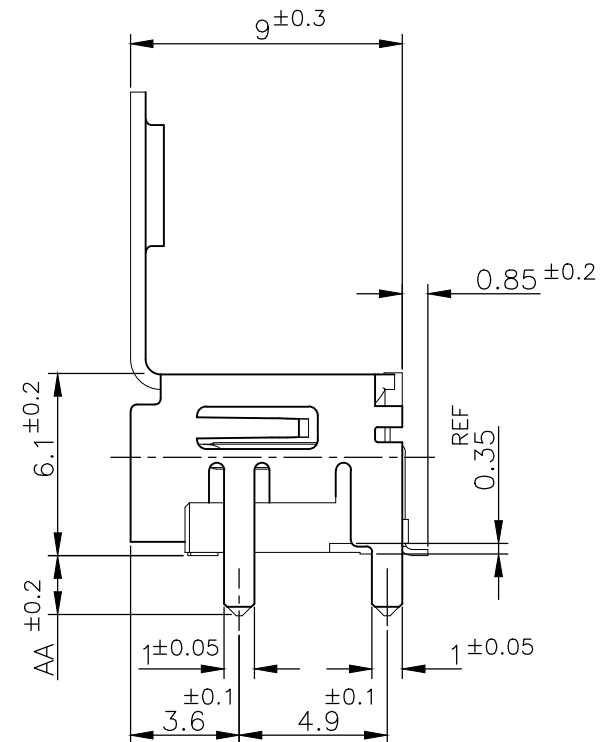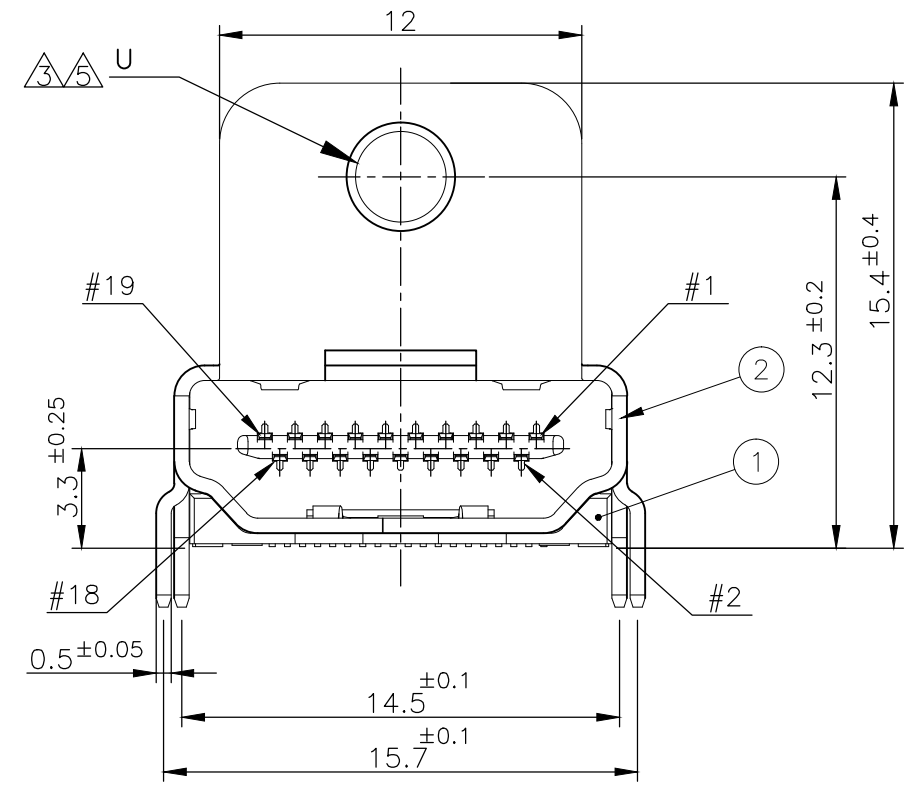


B

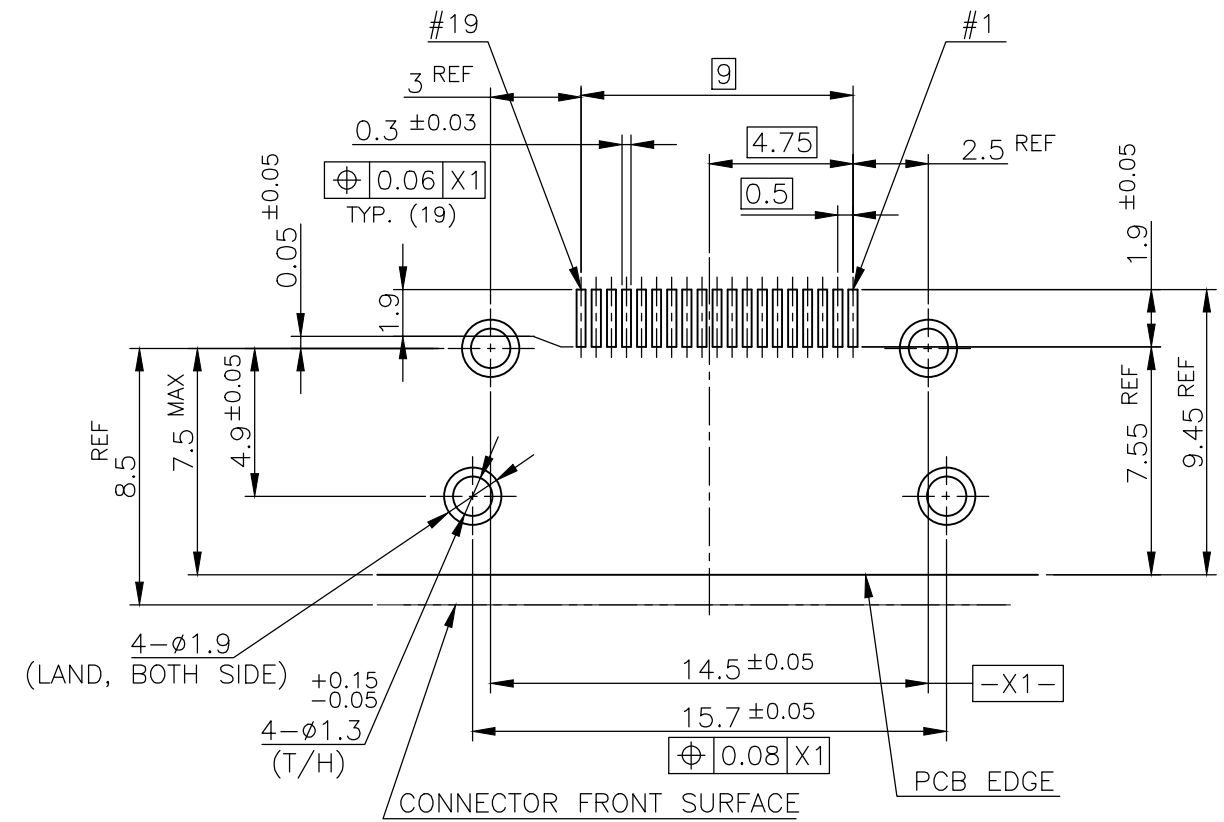

P.C.B LAYOUT (REFERENCE)
SHOWN AS CONNECTOR MOUNTING SIDE
TOLERANCE: NON-CUMULATIVE

A

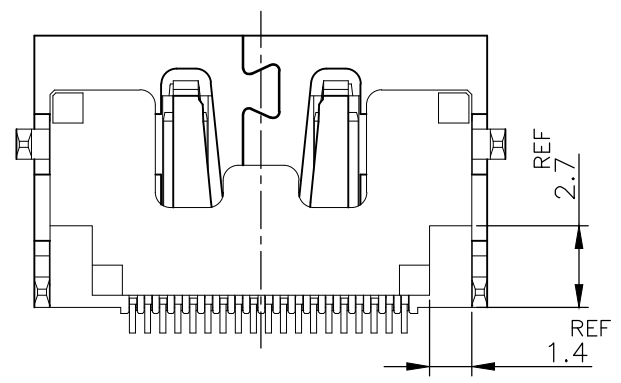

CONNECTOR: WITH FLANGE THROUGH HOLE TYPE

POLYIMIDE	TAPE	(4)
BRASS	CONTACT	(3)
PHOSPHOR BRONZE	SHELL	(2)
GLASS FILLED LCP UL94V-0, BLACK COLOR	HOUSING	(1)
MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
	0 PLC $\pm$ 1 PLC $\pm$ 2 PLC $\pm$ 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$
MATERIAL 材料	FINISH 仕上

DWN	CHK	APVD	PRODUCT SPEC 製品規格	APPLICATION SPEC 取付適用規格	WEIGHT
-----	-----	------	----------------------	----------------------------	--------

CUSTOMER DRAWING


TE Connectivity

HDMI 19 POS RECEPTACLE ASSY
SMT SHORT TYPE

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-1903015	-


SCALE 4:1 SHEET 3 OF 12 REV S

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

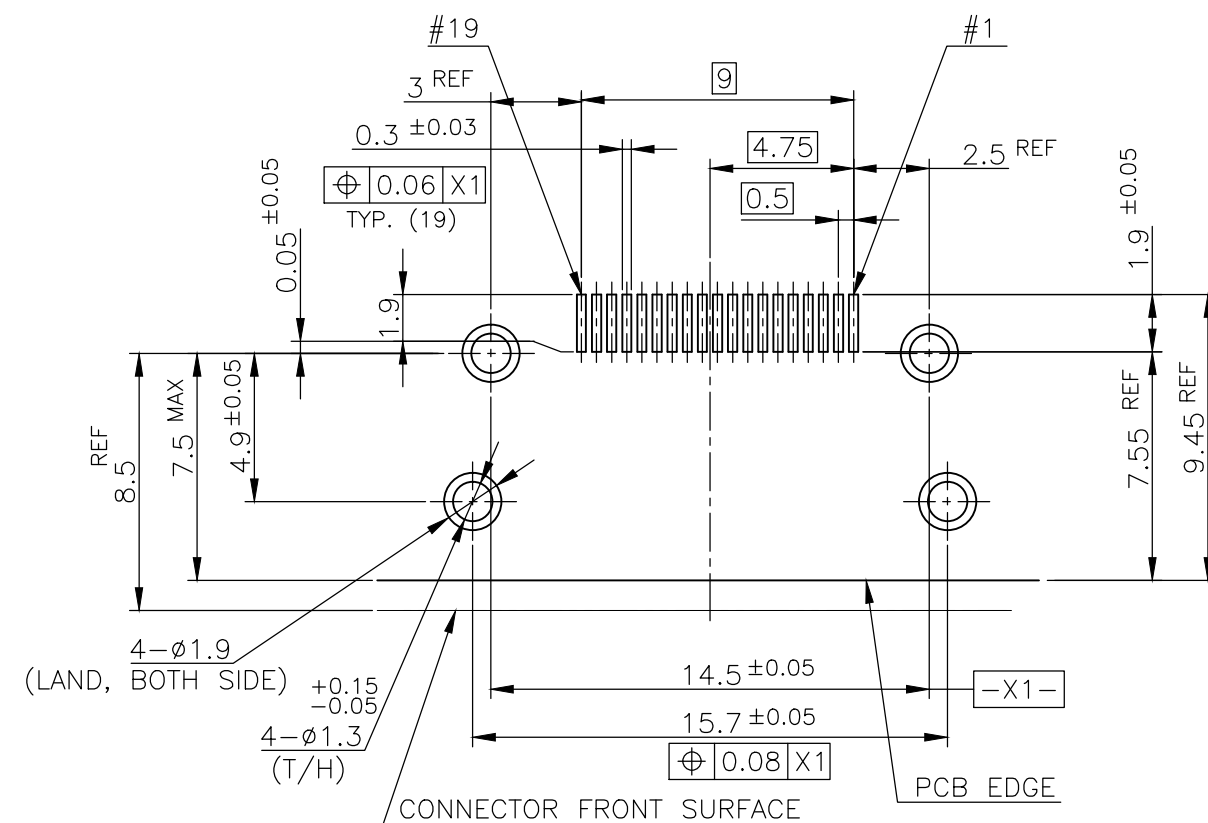


P.C.B LAYOUT (REFERENCE)
SHOWN AS CONNECTOR MOUNTING SIDE
TOLERANCE: NON-CUMULATIVE

POLYIMIDE	TAPE	④
BRASS	CONTACT	③
PHOSPHOR BRONZE	SHELL	②
GLASS FILLED LCP UL94V-0, BLACK COLOR	HOUSING	①
MATERIAL	DESCRIPTION	ITEM

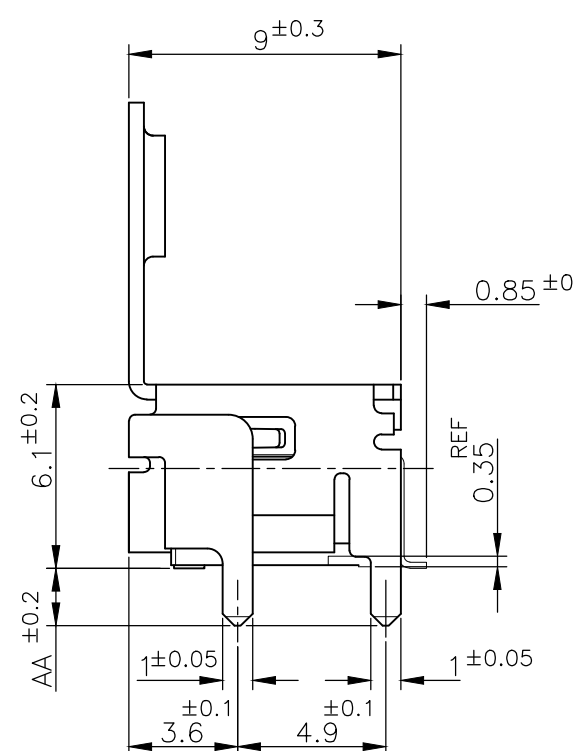

CONNECTOR: WITH FLANGE THROUGH HOLE TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS: 単位: 耗 mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD		NAME 名称	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 製品規格		HDMI 19 POS RECEPTACLE ASSY SMT SHORT TYPE	
MATERIAL 材料		APPLICATION SPEC 取付適用規格		SIZE	CAGE CODE
FINISH 仕上		WEIGHT		DRAWING NO 番号 A300779	RESTRICTED —
CUSTOMER DRAWING				SCALE 尺度 4:1	SHEET 4 OF 12
				REV	S

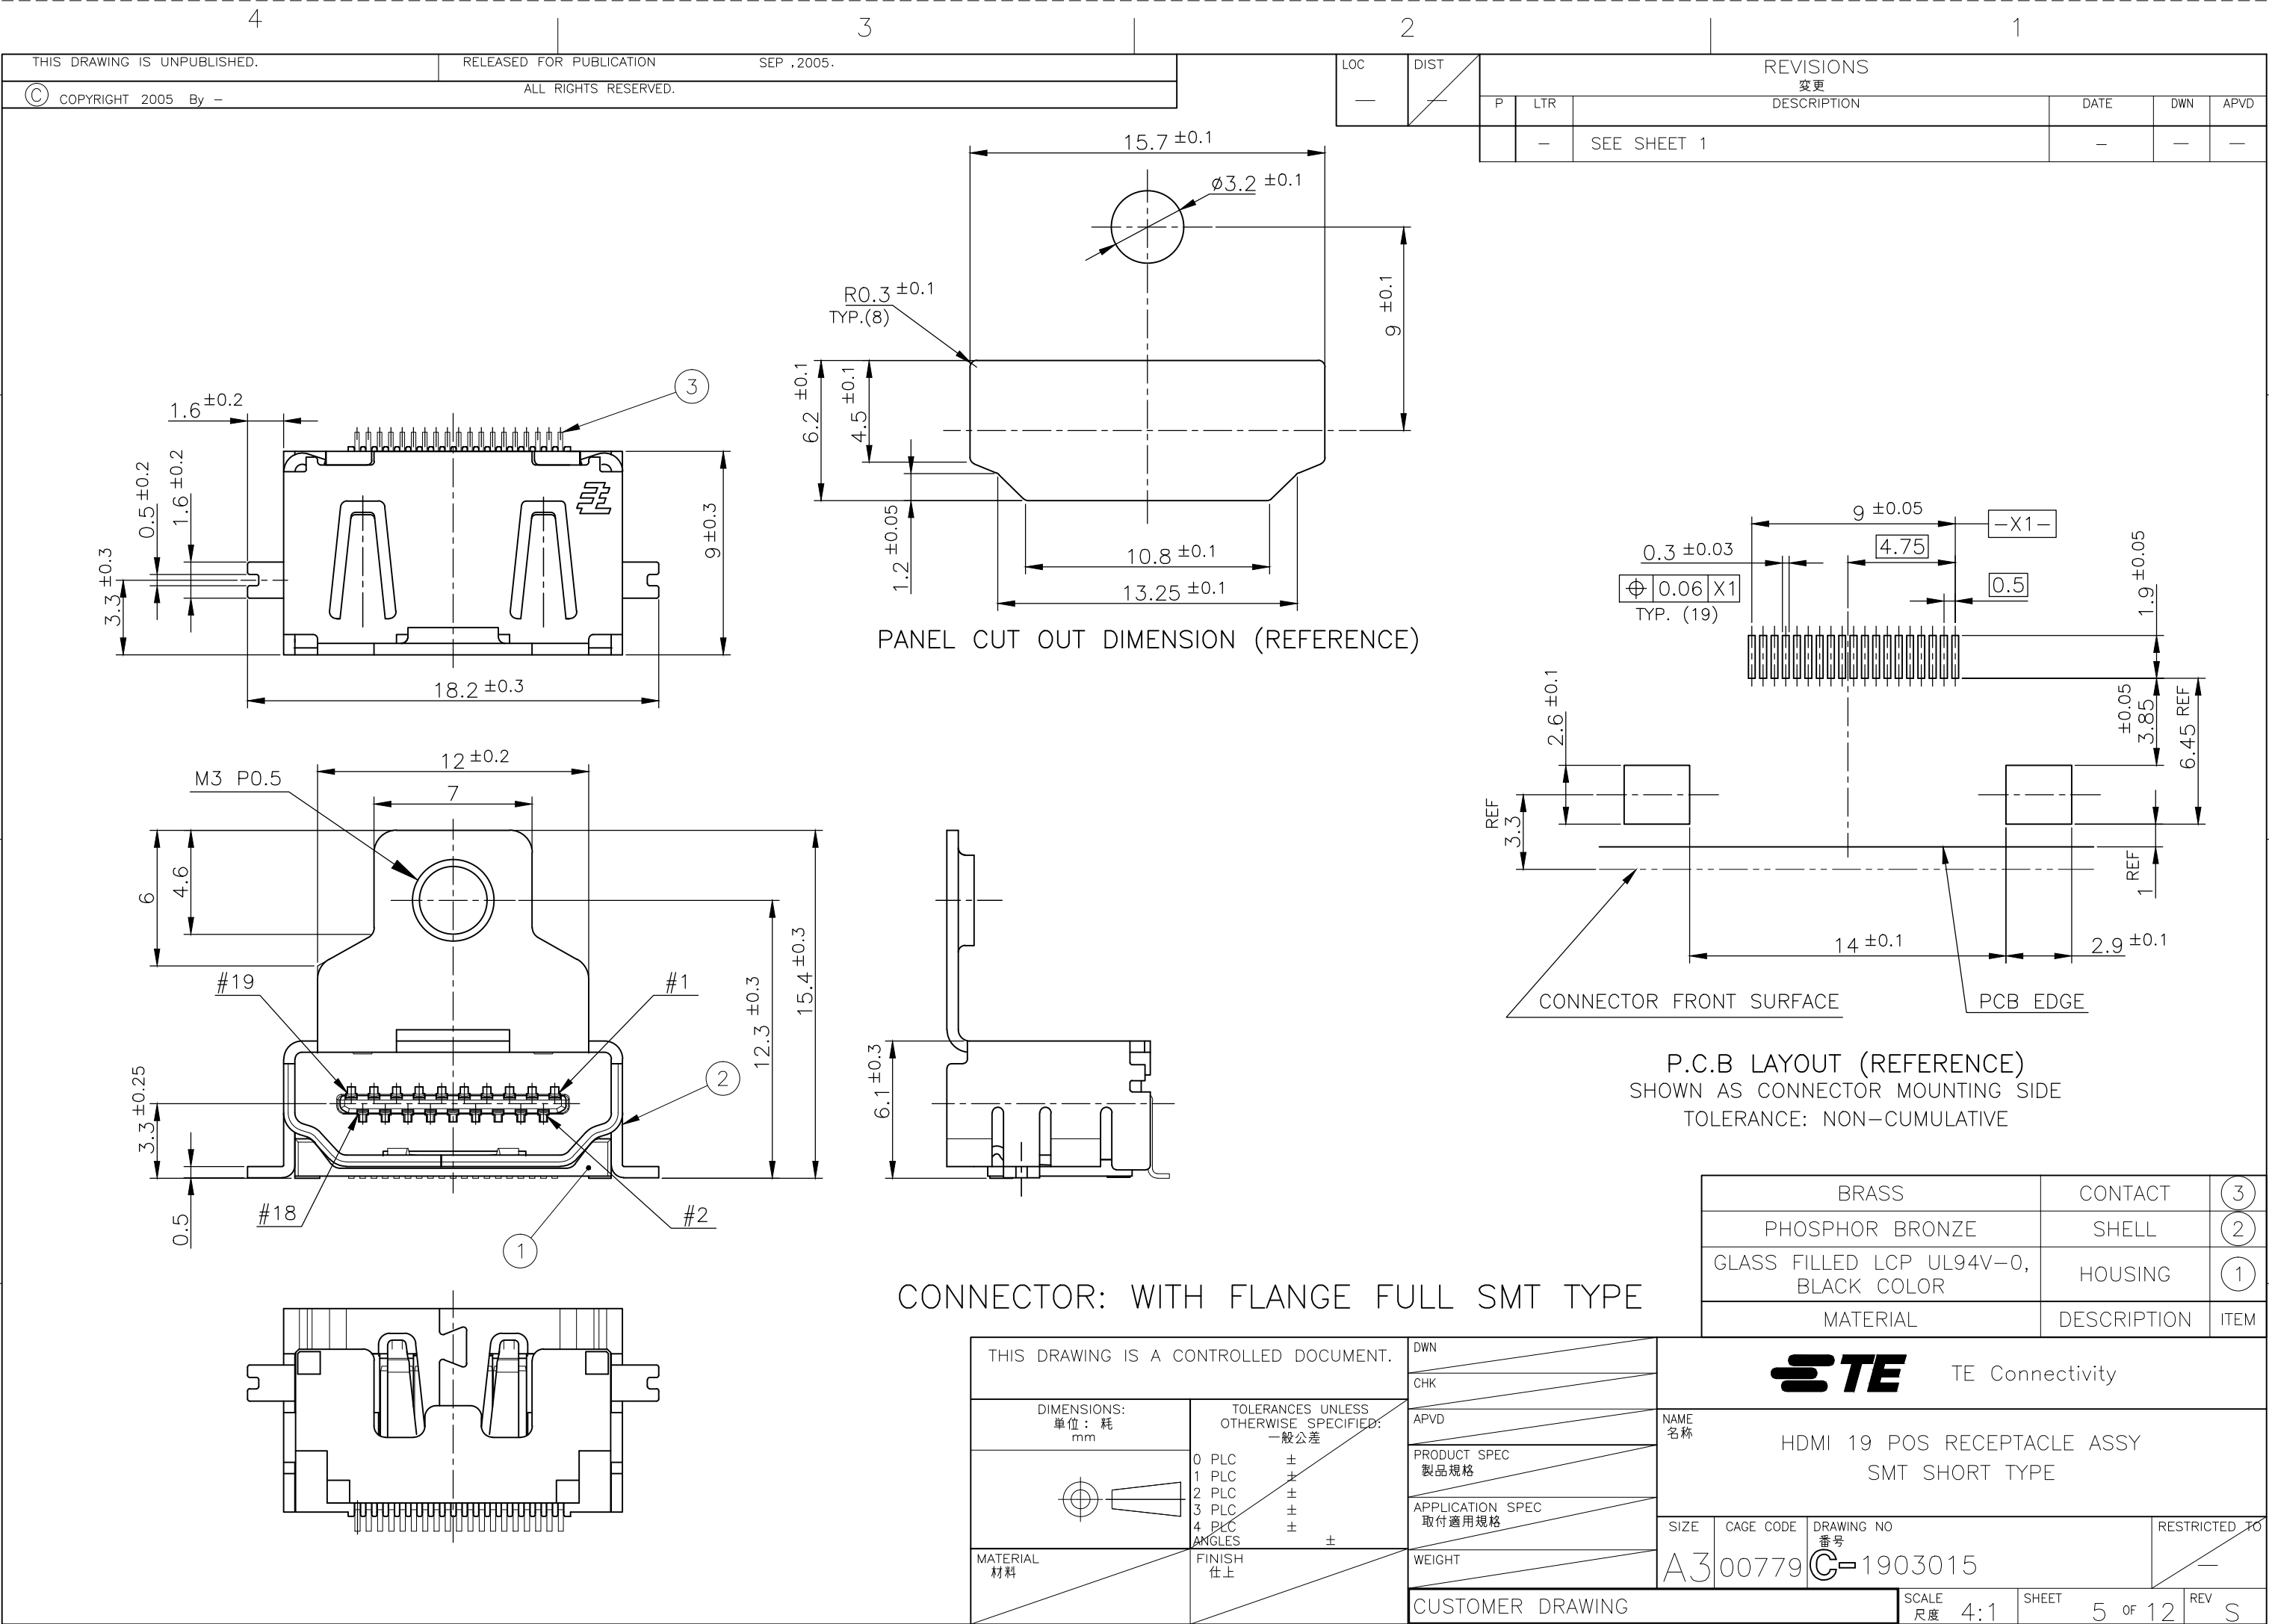

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP ,2005.

© COPYRIGHT 2005 By --

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

变更

DESCRIPTION

DATE

DWN

APVD

P

LTR

SEE SHEET 1

1903015-1, 2-1903015-2, 5-1903015-1
5-1903015-5, 7-1903015-1; AS SHOWN5-1903015-3; AS SHOWN
(SCALE 1:1)5-1903015-9; AS SHOWN
(SCALE 1:1)9-1903015-3; AS SHOWN
(SCALE 1:1)

DETAIL A

DETAIL A

DETAIL A

B-B

B-B

B-B

1903015-3; AS SHOWN
(SCALE 1:1)

DETAIL A

B-B



LABEL DESCRIPTION

TYCO P/N: *-1903015-*
QTY: * pcs
D/C:
MADE IN CHINA

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
单位: 耗
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±MATERIAL
材料FINISH
仕上

DWN

CHK

APVD

PRODUCT SPEC
製品規格APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

STE TE ConnectivityNAME
名称HDMI 19 POS RECEPTACLE ASSY
SMT SHORT TYPE

SIZE




CAGE CODE

DRAWING NO
番号


RESTRICTED TO

A300779

C-1903015

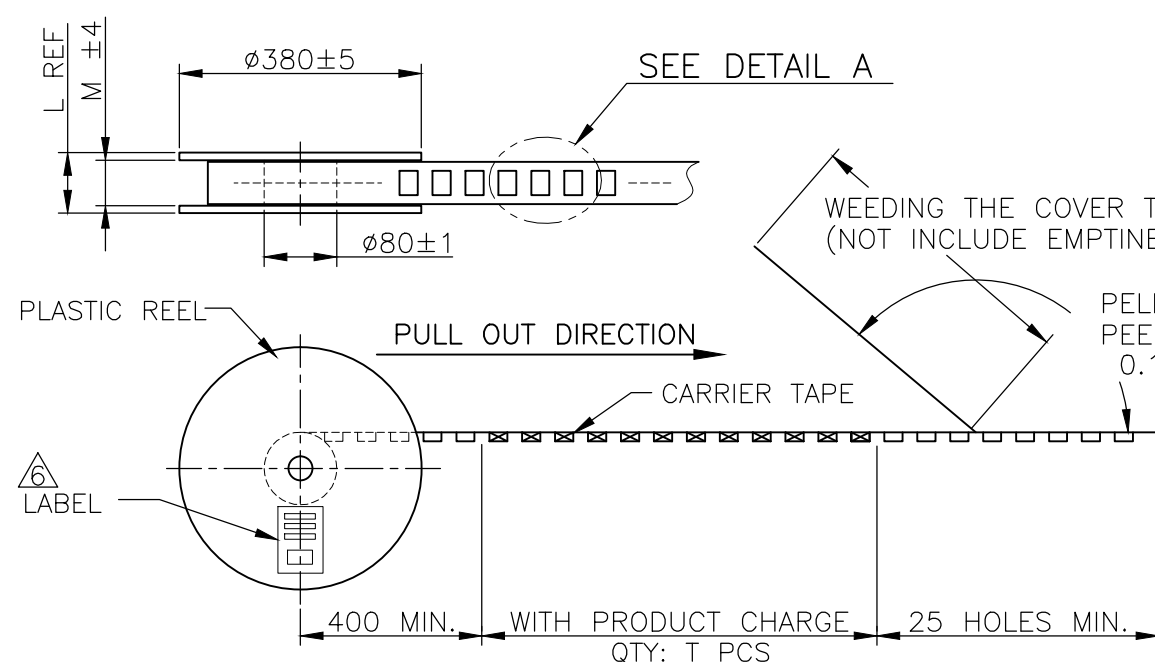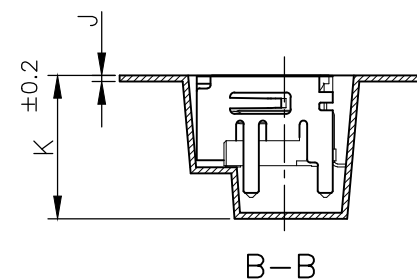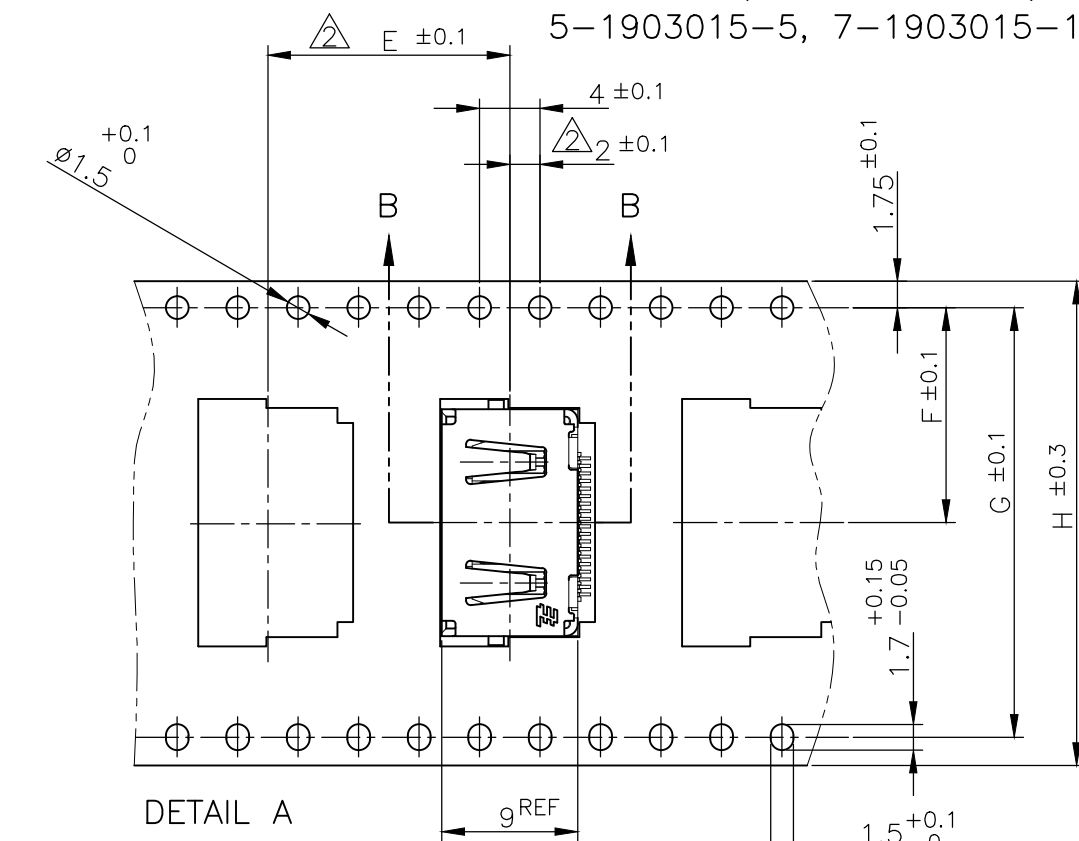SCALE
尺度 4:1SHEET
6 OF 12REV
SWEEDING THE COVER TAPE: 300 MIN
(NOT INCLUDE EMPTINESS POCKET)PELLING ANGLE: 165°~180°
PEELING STRENGTH:
0.1~0.7N (300mm/min.)

OBSOLETE ⓘ

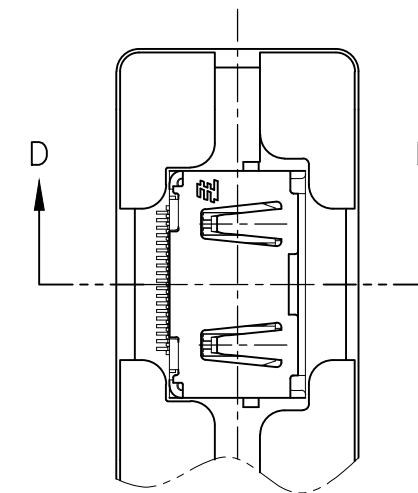




MATING FACE DIRECTION

MATING FACE DIRECTION


D-D
(SCALE 2:1)

1470-19 (3/11)

SEE DETAIL C—

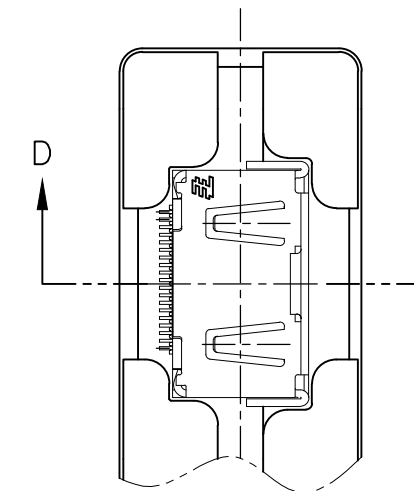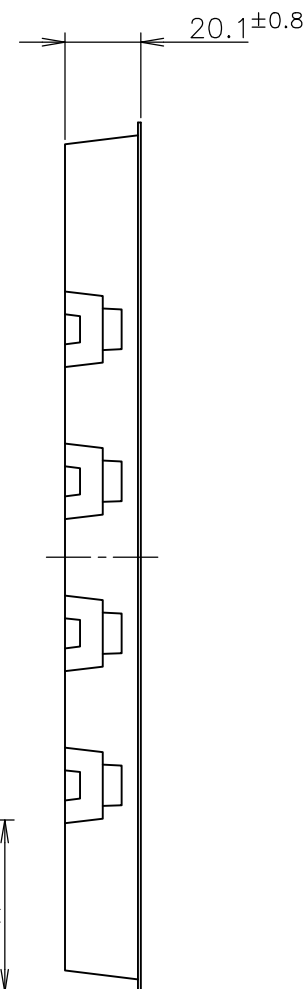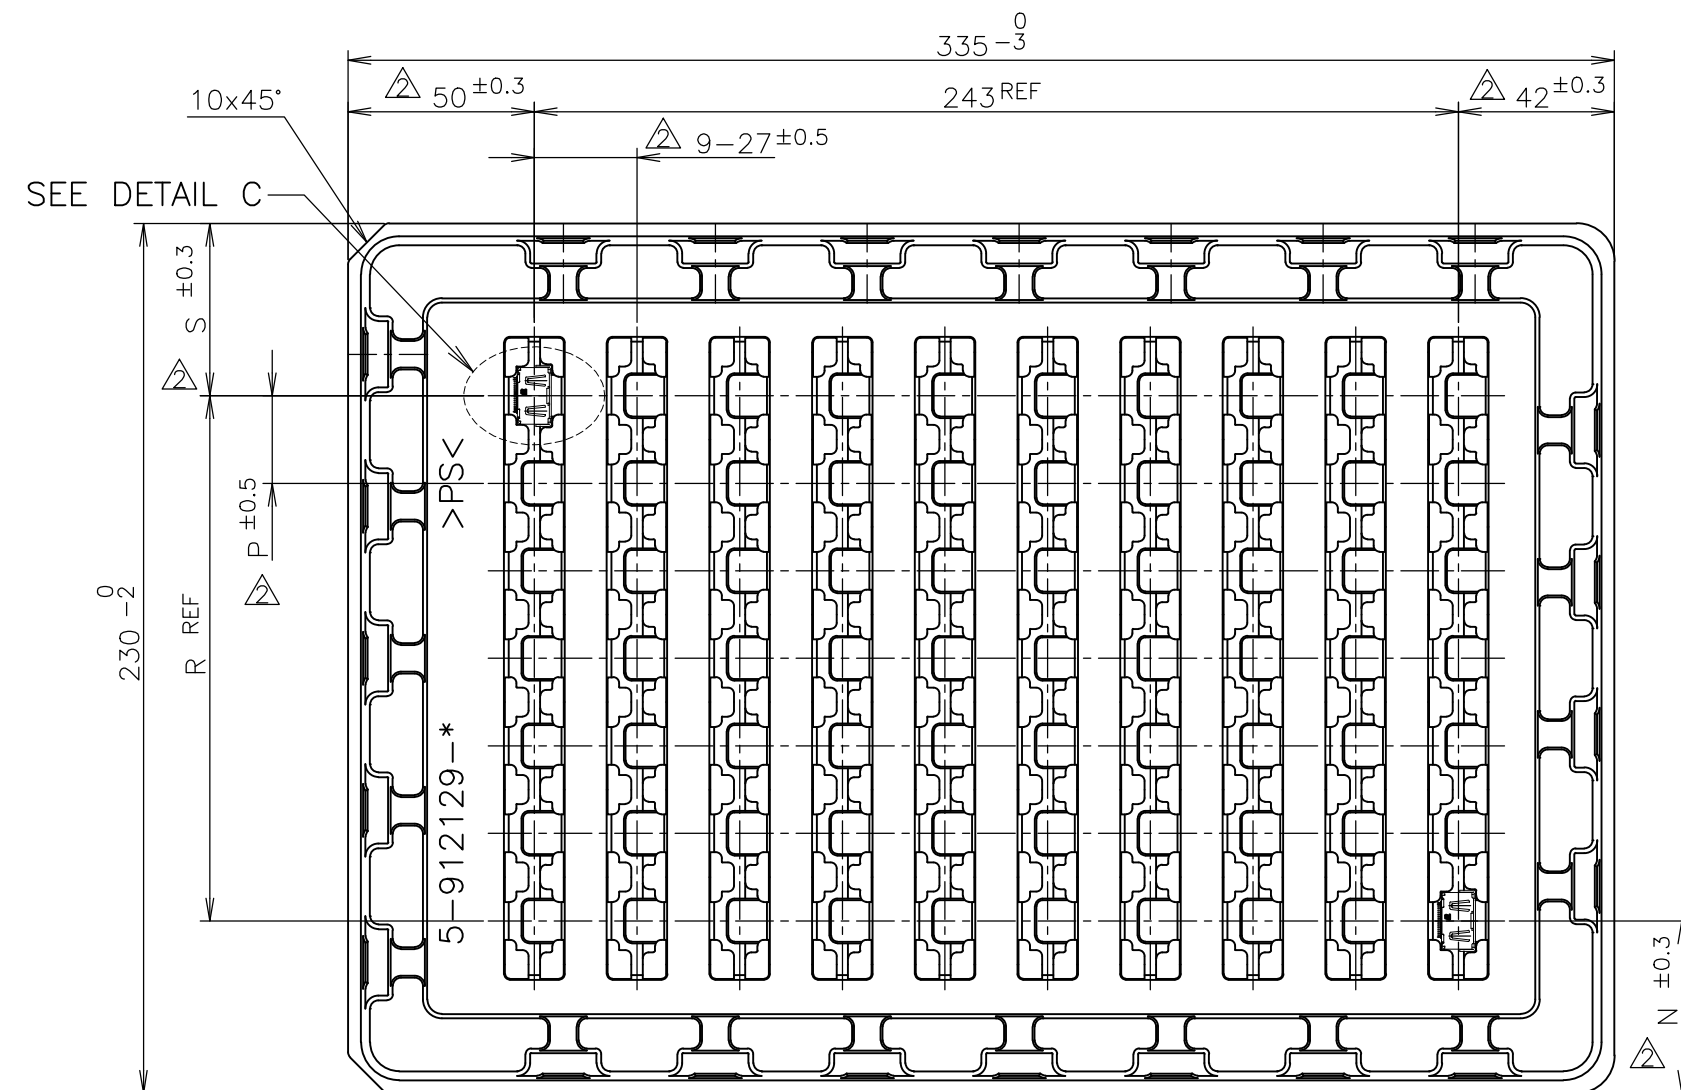

DETAIL C
(SCALE 2:1)

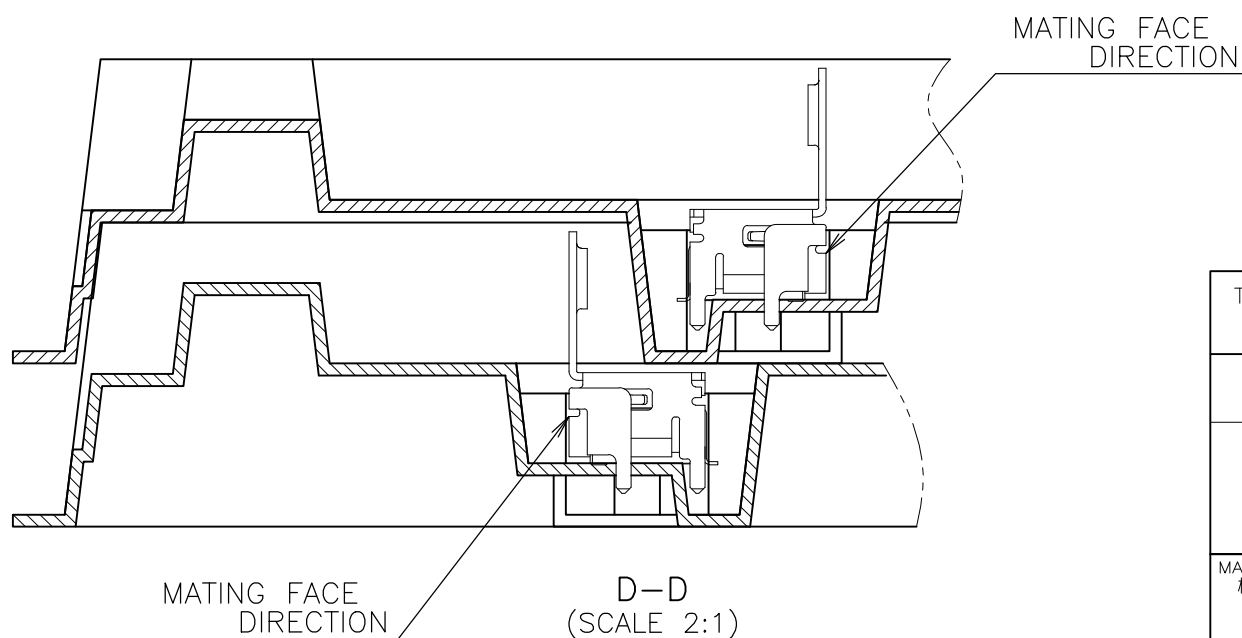

CUSTOMER DRAWING

FINISH
仕上

REV	S
-----	---

DESCRIPTION








TE Connectivity


HDMI 19 POS RECEPTACLE ASSY
SMT SHORT TYPE

1903015-7, 1903015-8; AS SHOWN

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
-	-	-	-	SEE SHEET 1	-

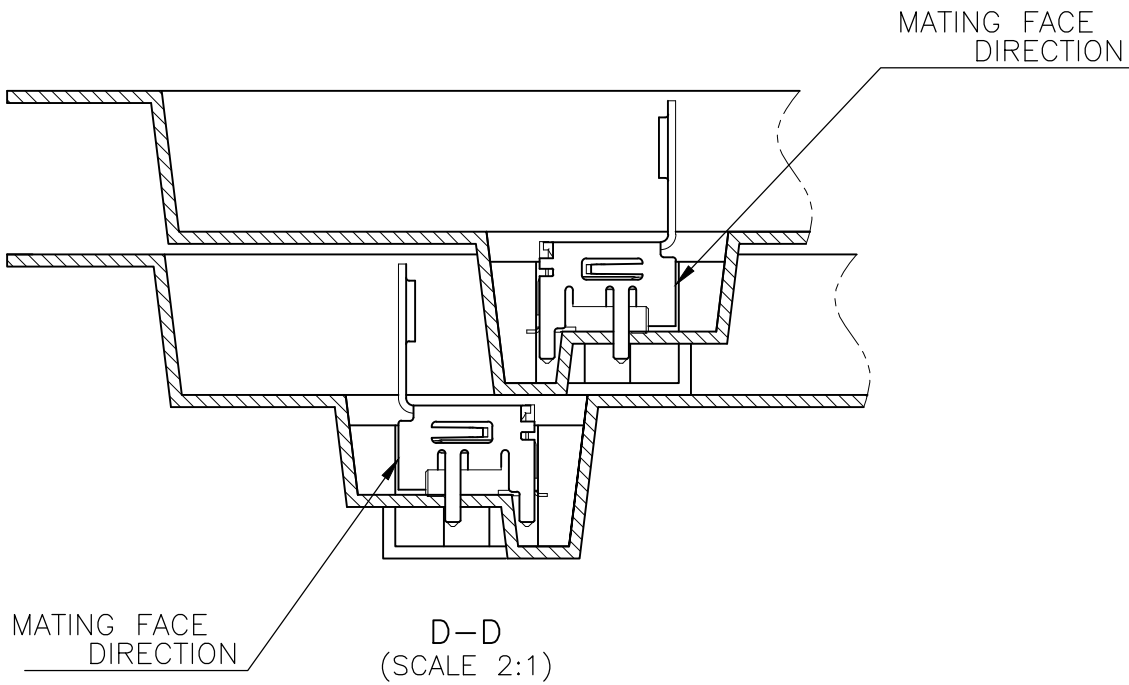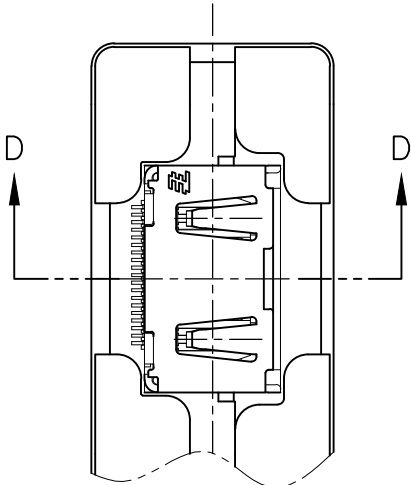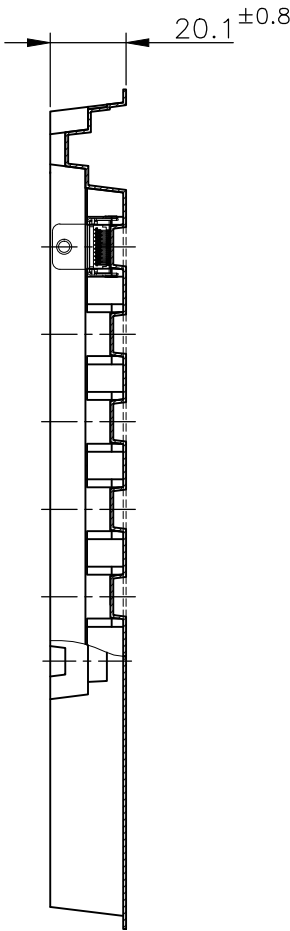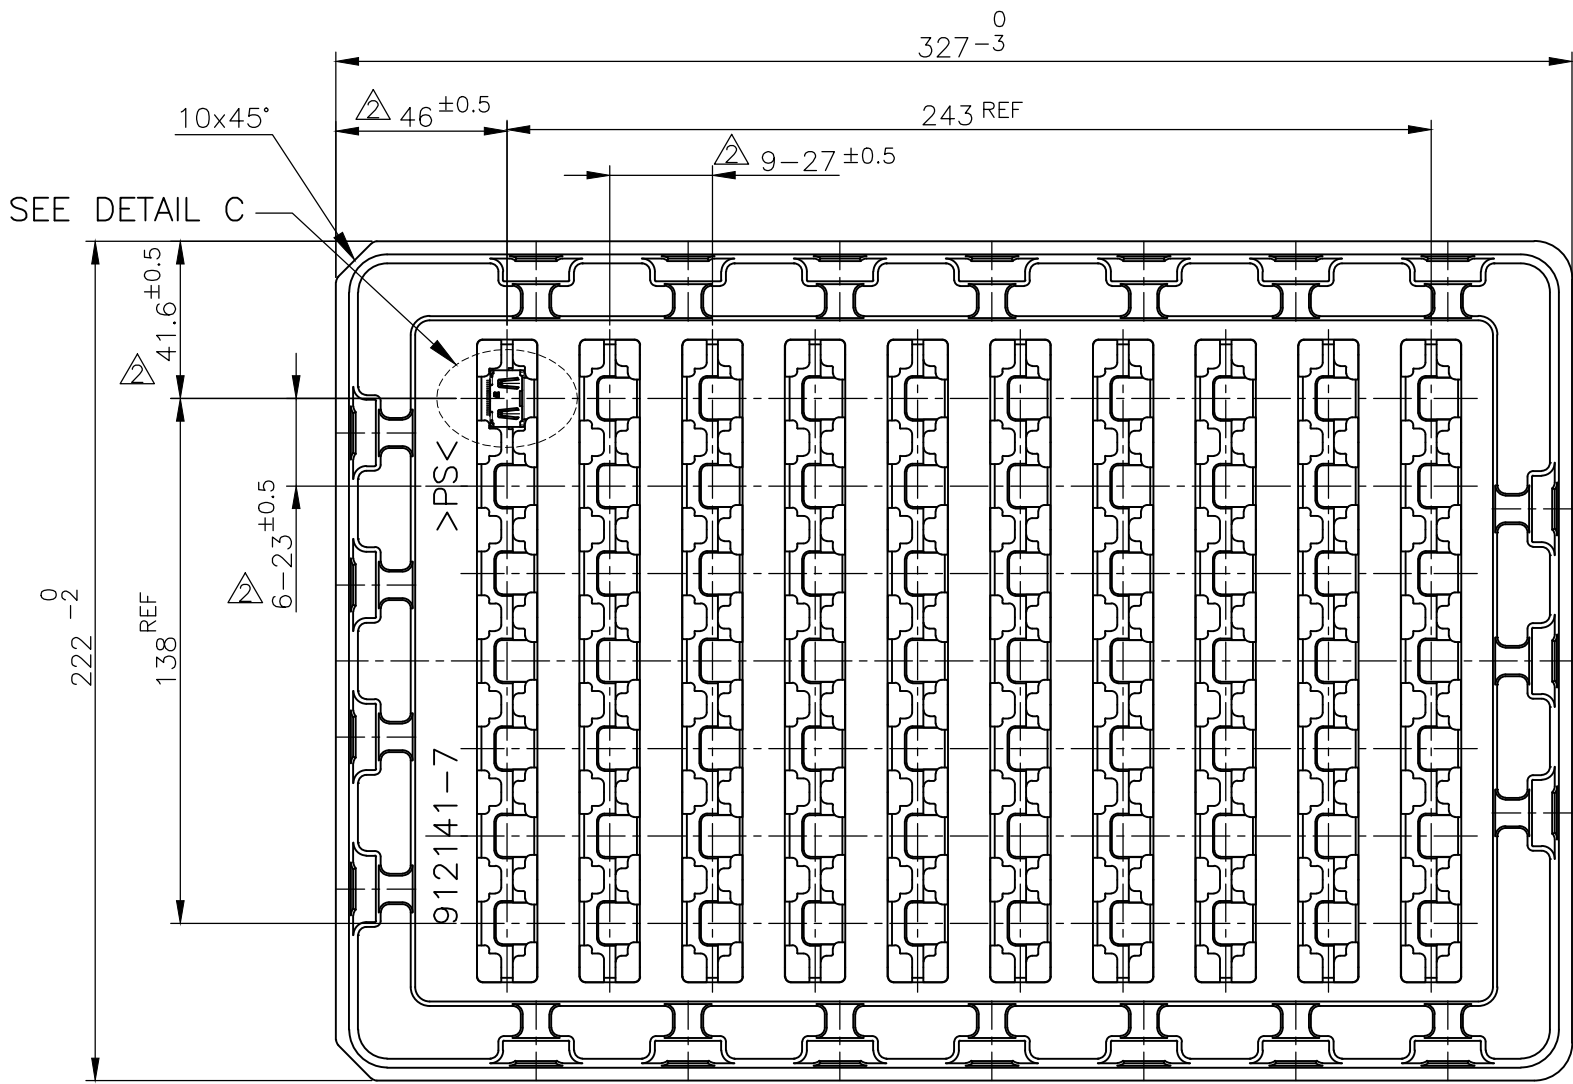

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity															
		CHK																	
DIMENSIONS: 単位： 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 <table><tr><td>0 PLC</td><td>±</td></tr><tr><td>1 PLC</td><td>±</td></tr><tr><td>2 PLC</td><td>±</td></tr><tr><td>3 PLC</td><td>±</td></tr><tr><td>4 PLC</td><td>±</td></tr><tr><td>ANGLES</td><td>±</td></tr></table>		0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±	NAME 名称		HDMI 19 POS RECEPTACLE ASSY SMT SHORT TYPE	
0 PLC	±																		
1 PLC	±																		
2 PLC	±																		
3 PLC	±																		
4 PLC	±																		
ANGLES	±																		
		APVD																	
		PRODUCT SPEC 製品規格																	
		APPLICATION SPEC 取付適用規格																	
MATERIAL 材料		FINISH 仕上		SIZE		CAGE CODE	DRAWING NO 番号	RESTRICTED TO —											
				A3		00779	C-1903015												
CUSTOMER DRAWING						SCALE 尺度 4:1	SHEET 9 OF 12	REV S											

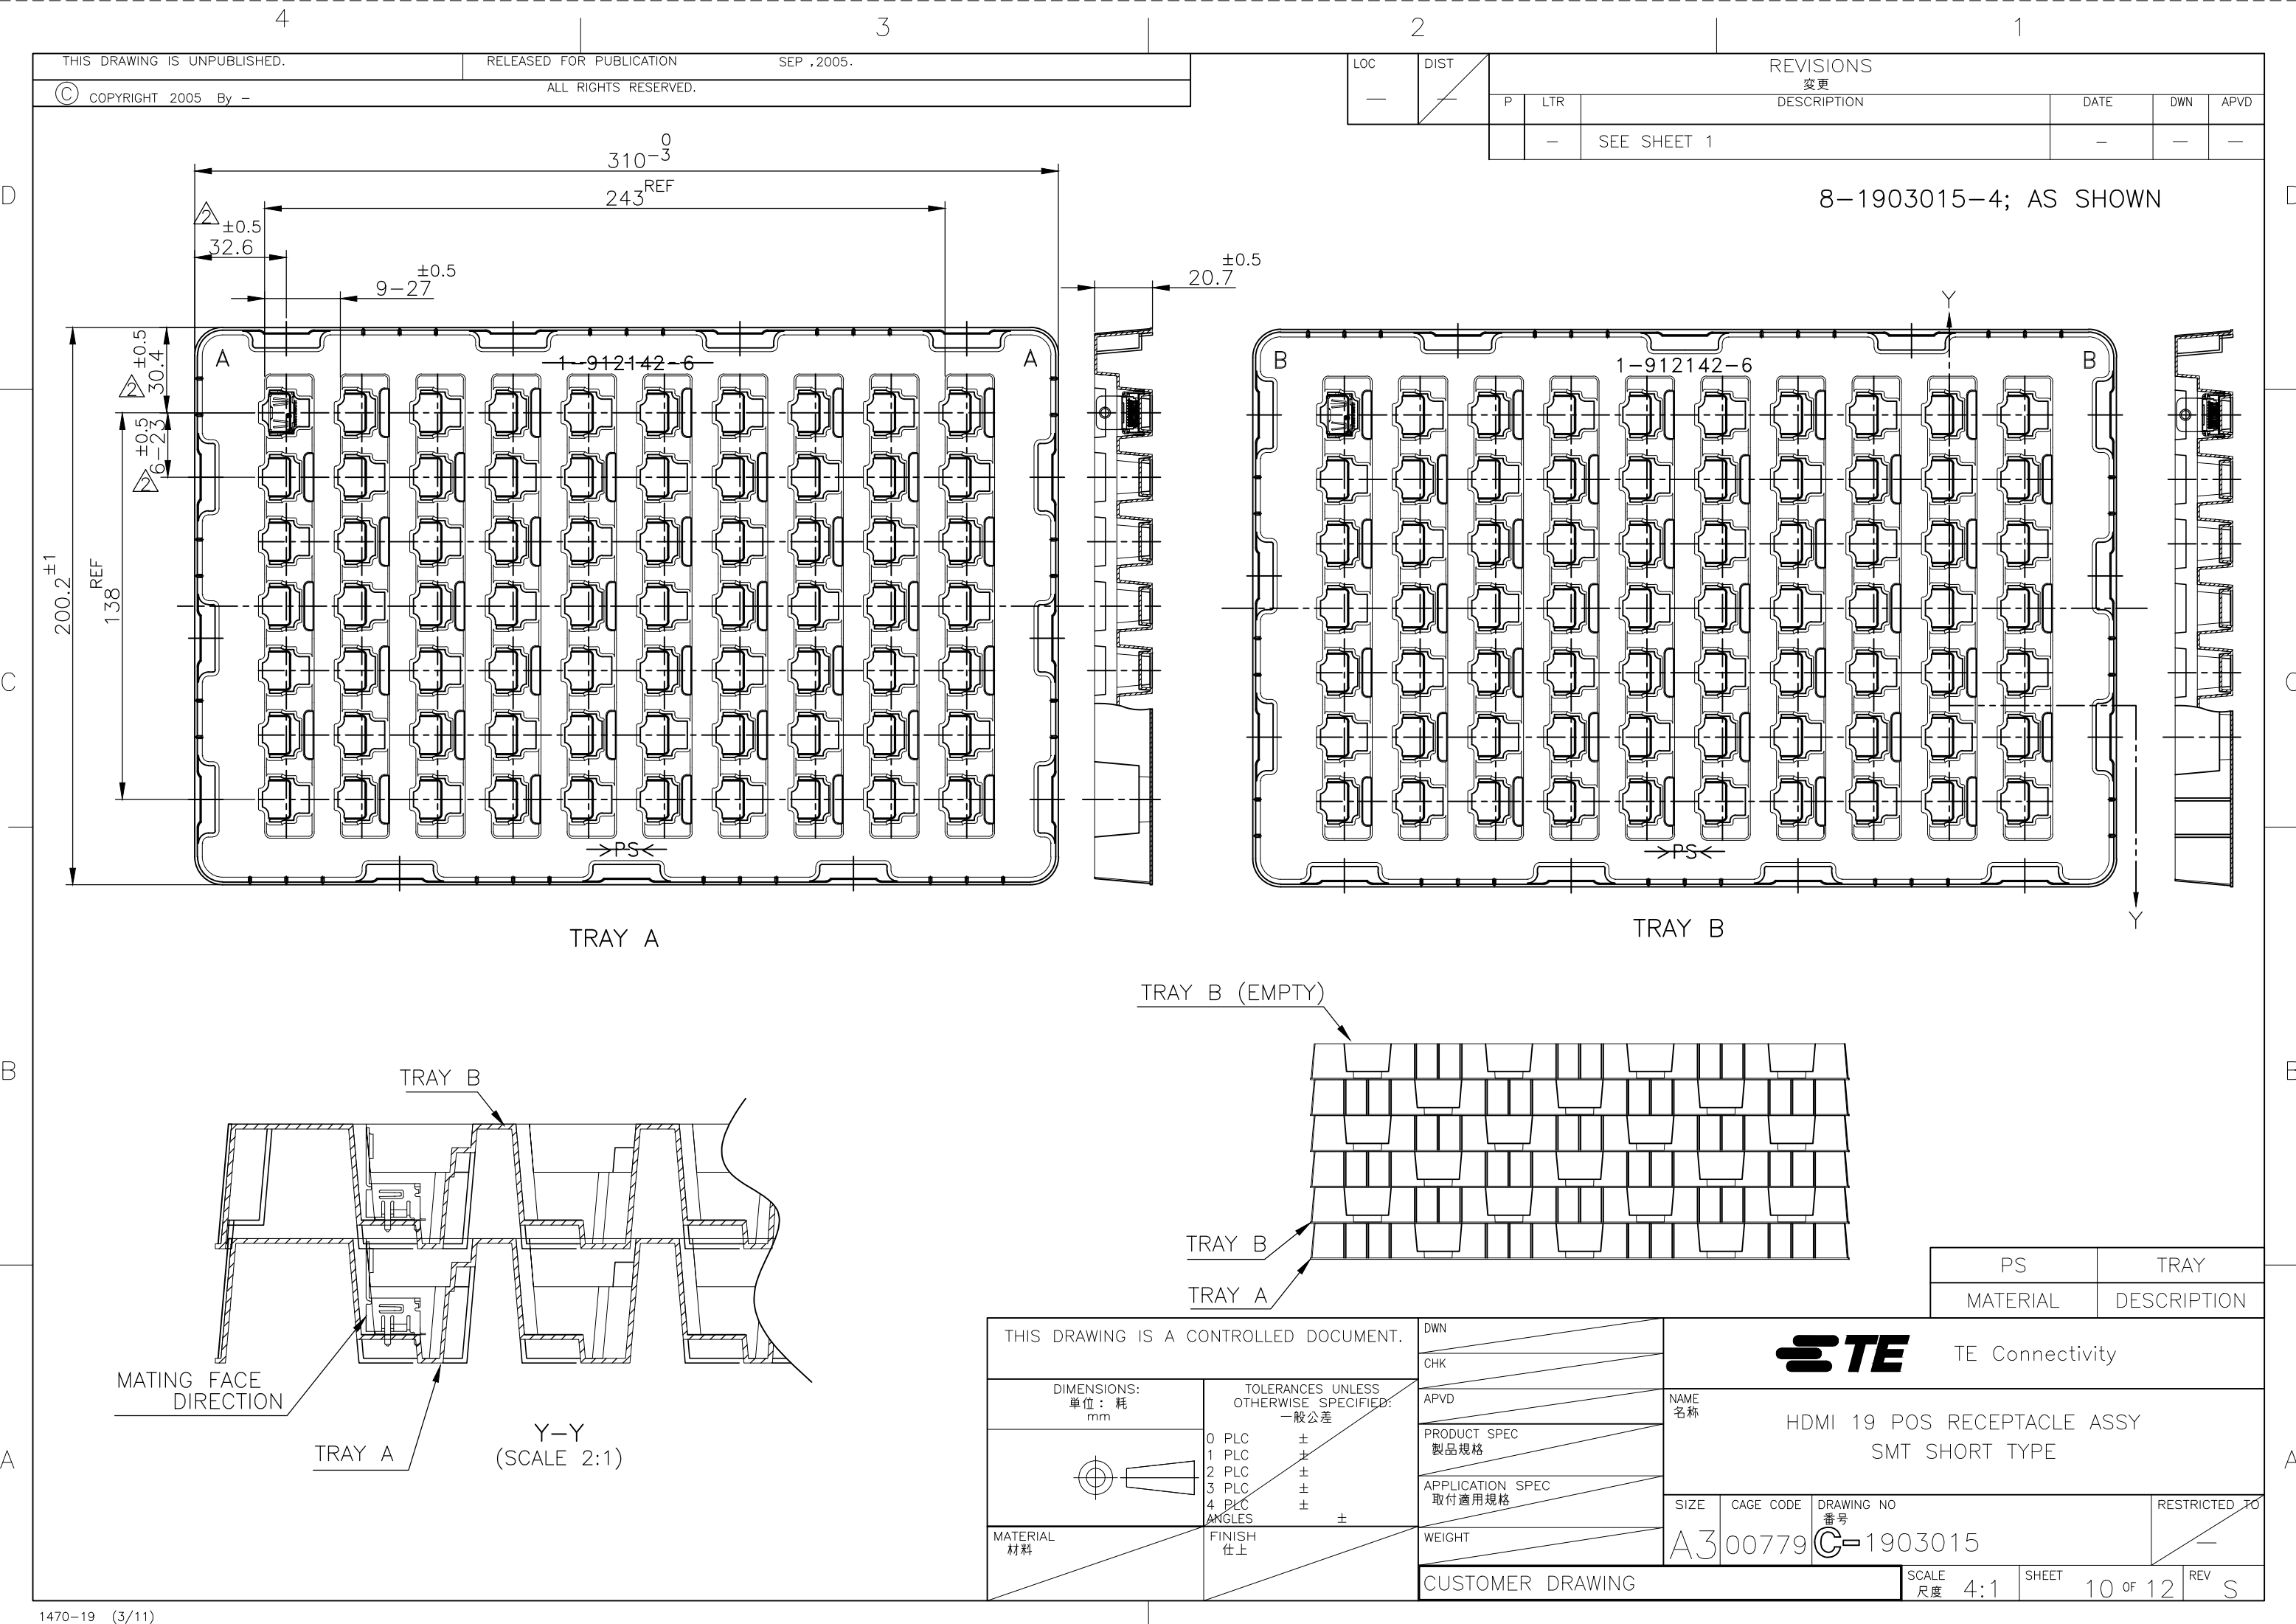


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
—	—	—	—	SEE SHEET 1	—


8-1903015-4; AS SHOWN


TRAY A

TRAY B





TRAY B (EMPTY)

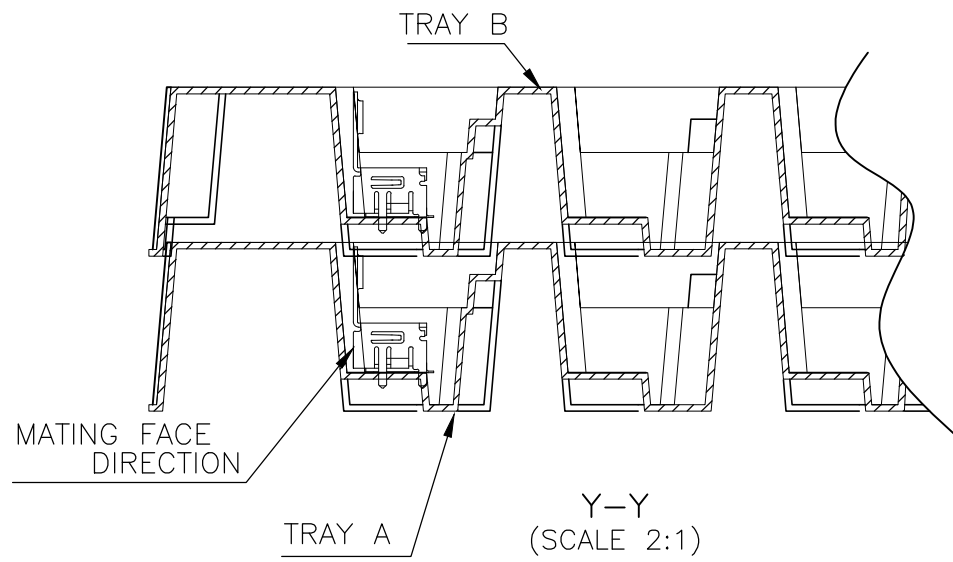


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity					
		CHK						
DIMENSIONS: 単位： 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD	NAME 名称 HDMI 19 POS RECEPTACLE ASSY SMT SHORT TYPE					
	0 PLC ±	PRODUCT SPEC 製品規格						
	1 PLC ±	APPLICATION SPEC 取付適用規格						
	2 PLC ±							
	3 PLC ±							
4 PLC ±		SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO —			
MATERIAL 材料	FINISH 仕上	A3	00779	C-1903015				
		WEIGHT	CUSTOMER DRAWING			SCALE 尺度 4:1	SHEET 10 OF 12	REV S

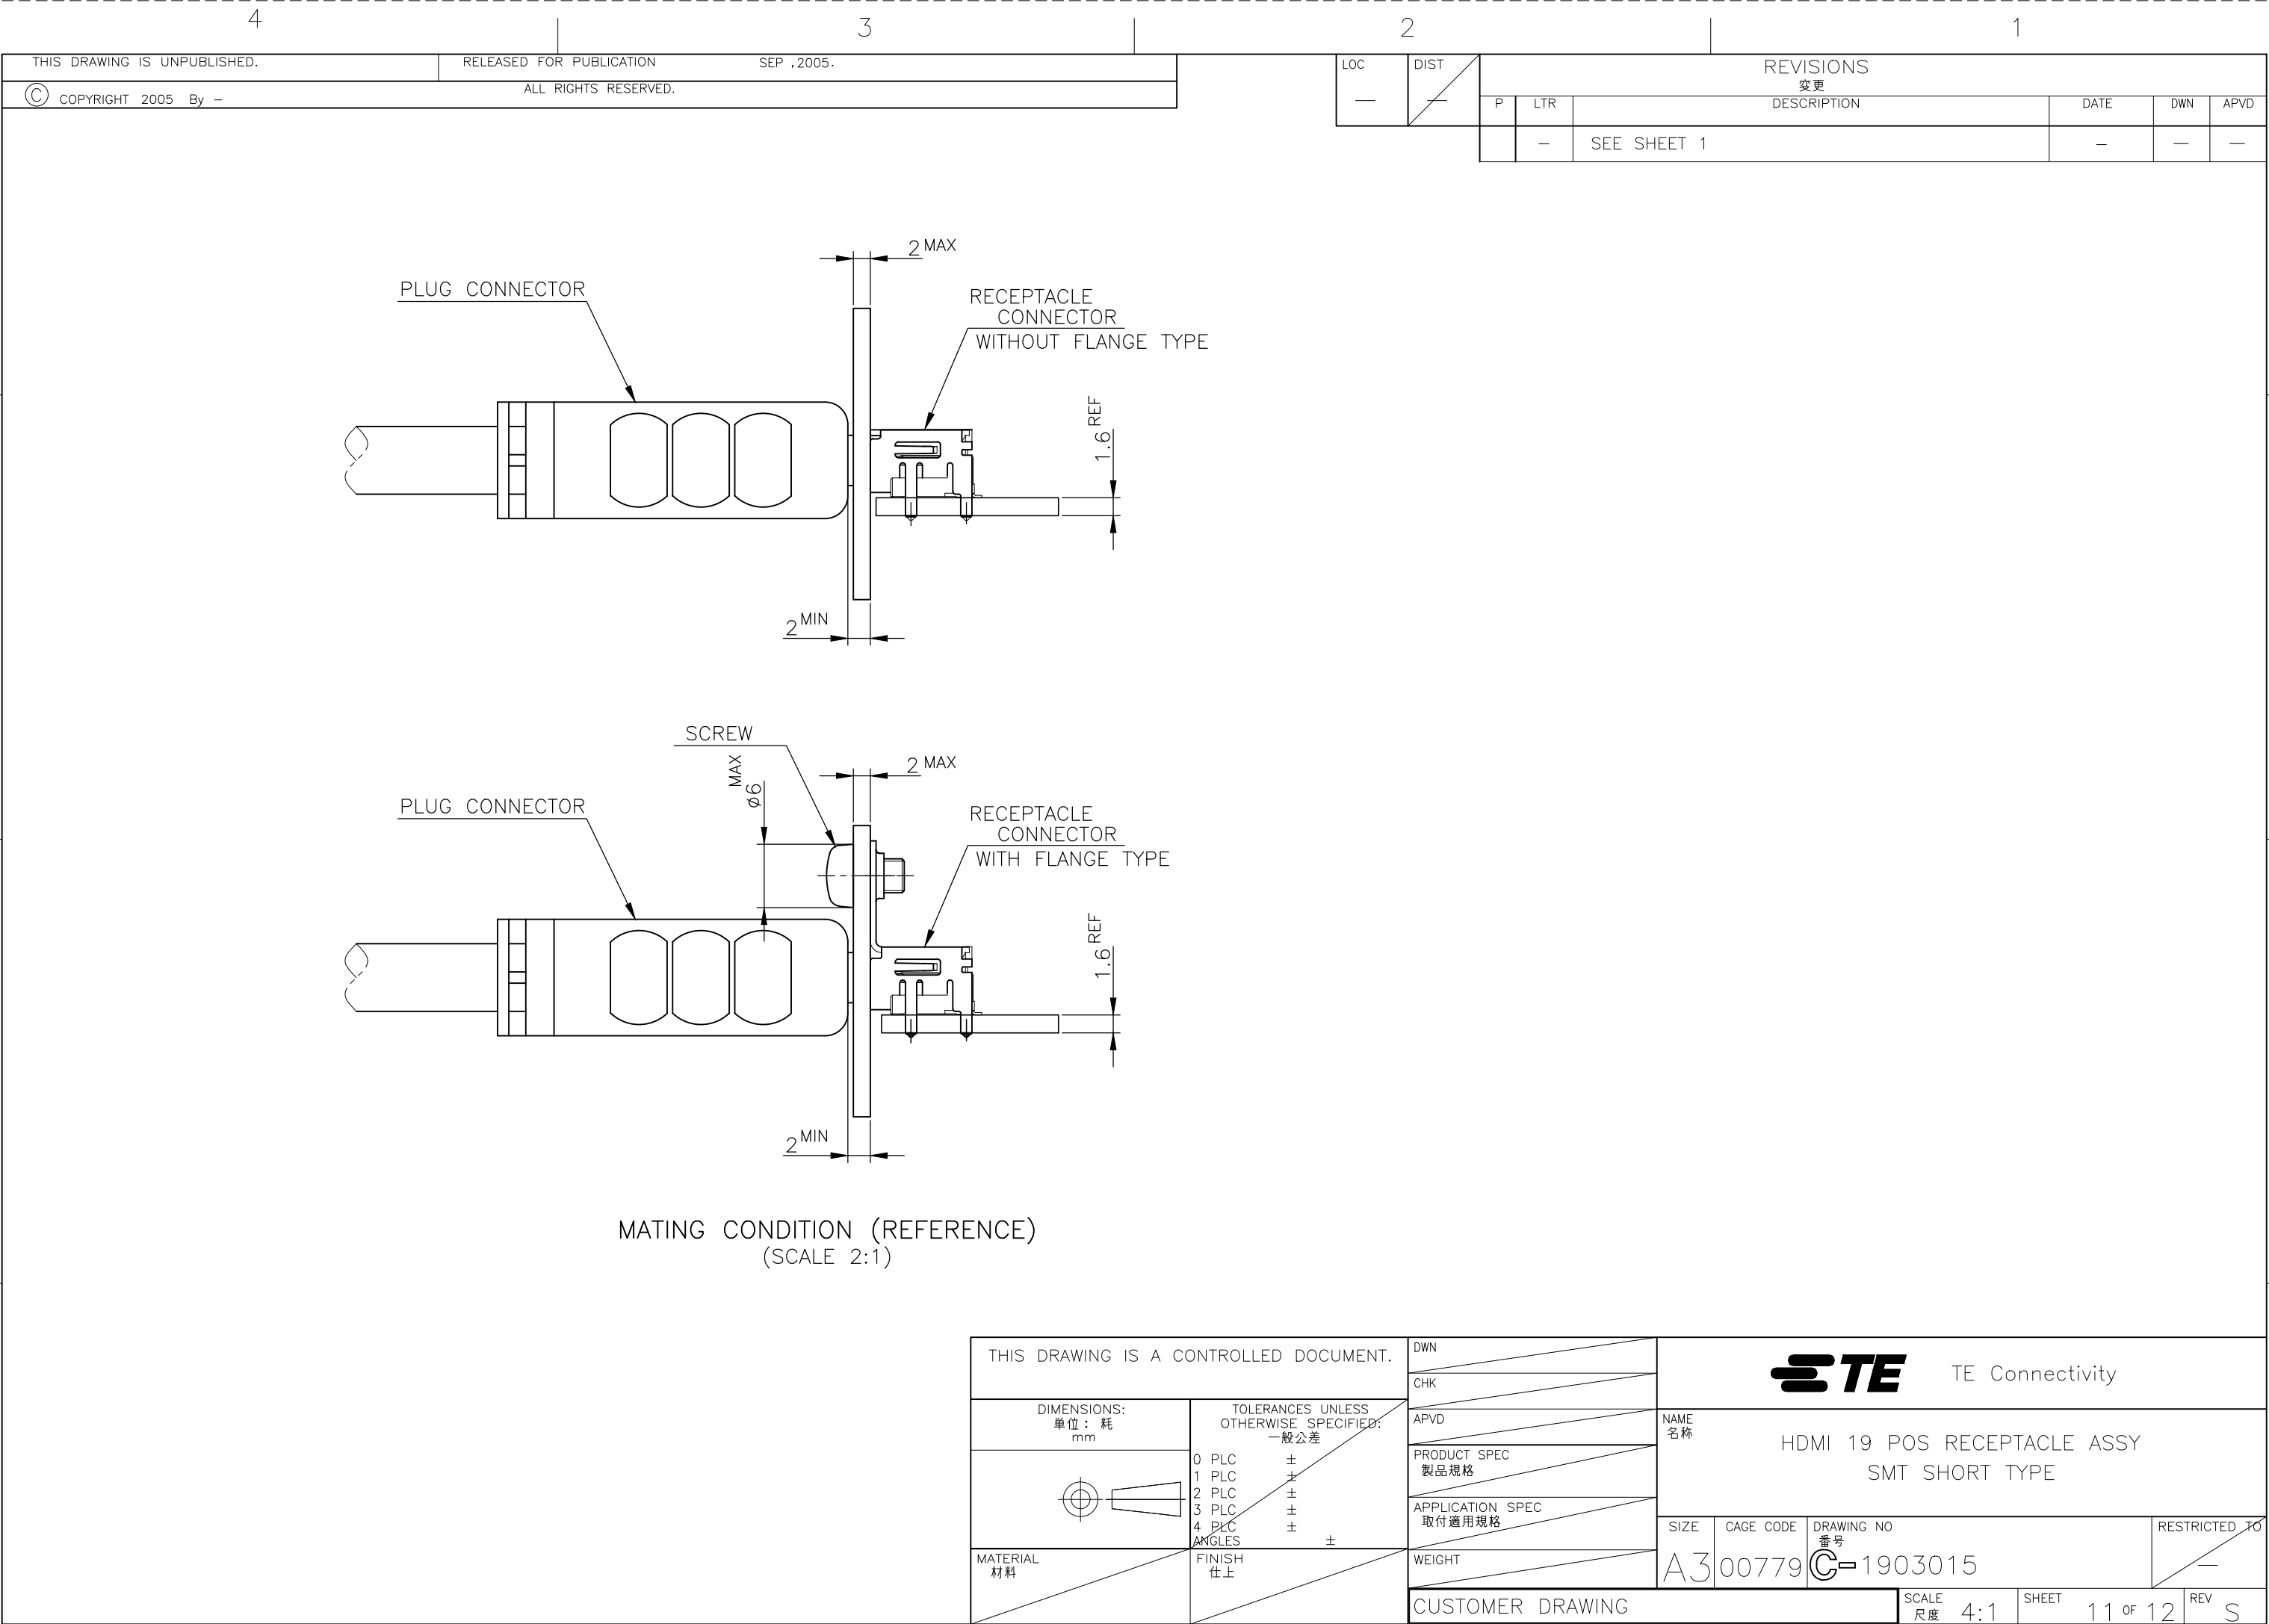

P/N:6-1903015-3

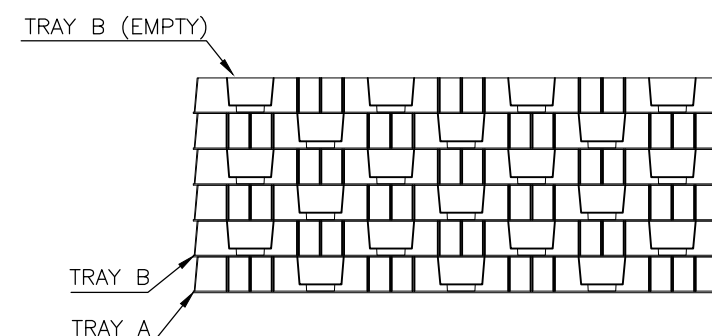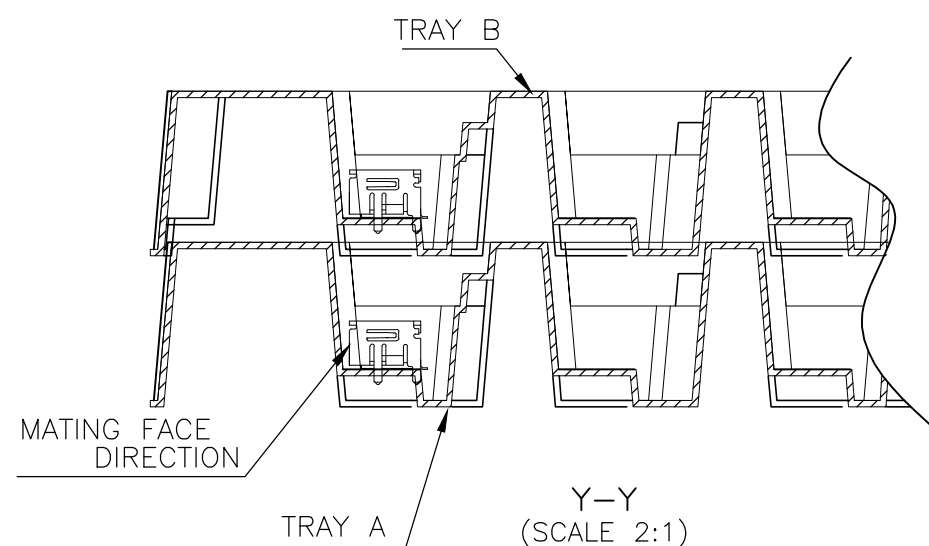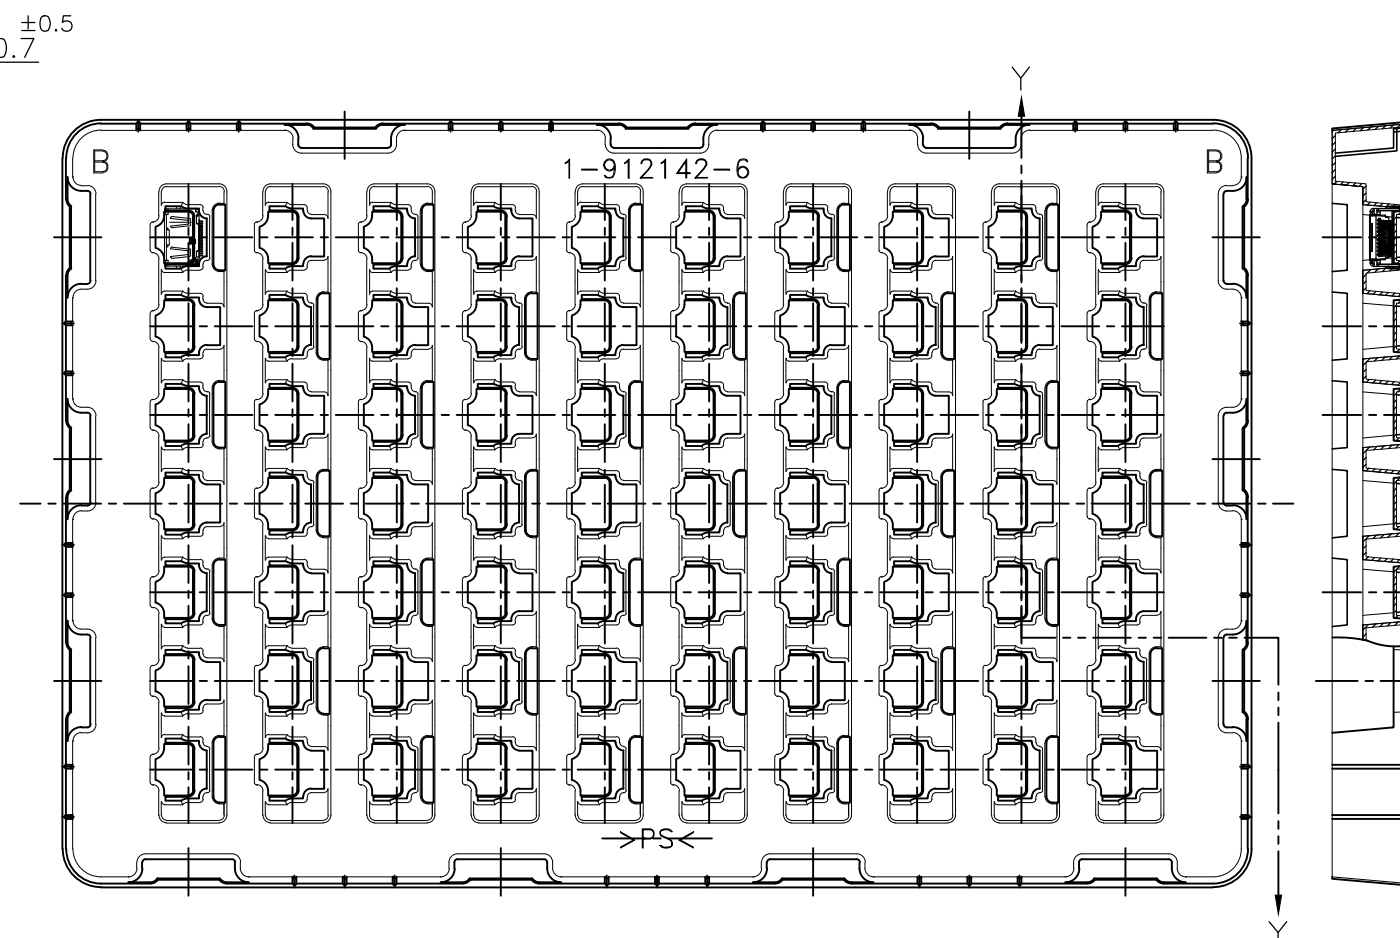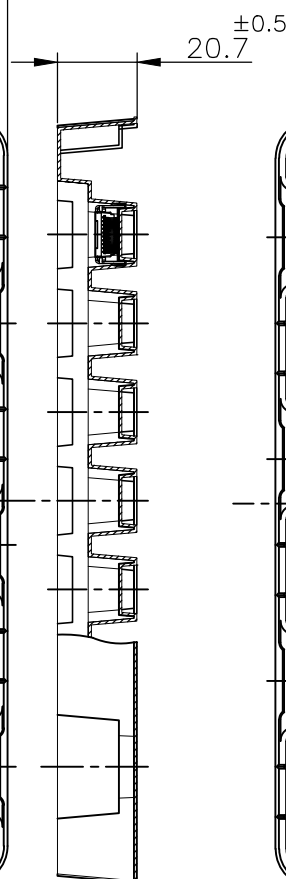

PS	TRAY
MATERIAL	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		 TE Connectivity				
DIMENSIONS: 单位： 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN	NAME 名称	HDMI 19 POS RECEPTACLE ASSY SMT SHORT TYPE		
		CHK				
	0 PLC ±	APVD				
	1 PLC ±	PRODUCT SPEC 製品規格				
	2 PLC ±	APPLICATION SPEC 取付適用規格				
	3 PLC ±	SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED T	
MATERIAL 材料	FINISH 仕上	4 PLC ±	A3	00779	C-1903015	—
		ANGLES ±				
WEIGHT			CUSTOMER DRAWING			
			SCALE 尺 度	4:1	SHEET 12 OF 12	REV S

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru