

1. MATERIALS AND FINISHES

BODY	- BRASS, NICKEL PLATING
CONTACT	- BERYLLIUM COPPER, GOLD PLATING
BULLET CONTACT	- BRASS, GOLD PLATING
INSULATOR	- PTFE
HEX NUT	- BRASS, NICKEL PLATING
LOCK WASHER	- BRASS, NICKEL PLATING
GASKET	- SILICONE RUBBER
FERRULE	- SEAMLESS COPPER TUBE, NICKEL PLATING
HEAT SHRINK TUBING	- CROSSLINKED POLYOLEFIN

2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM
- B. FREQUENCY RANGE: DC - 6 GHz
- C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -40° C TO +85° C


4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 31-6508, AND DATE CODE"

5. RECOMMENDED CABLE ASSEMBLY INSTRUCTIONS:


- TRIM CABLE AS SHOWN.
- SLIDE HEAT SHRINK TUBING, FERRULE AND INSULATOR DISC ONTO CABLE.
- SOLDER CABLE CENTER CONDUCTOR TO BULLET CONTACT.
- INSERT CABLE WITH FOIL ENTERING CONNECTOR AND BRAID OVER KNURL.
- CRIMP FERRULE OVER BRAID WITH 0.213" HEX DIE.
- APPLY HEAT SHRINK TUBING OVER FERRULE.
- HEAT SHRINK TUBING SHOULD FULLY (360 DEG) COVER THE BUMP ON BODY AND END WITHIN AREA "A"

6. RECOMMENDED TORQUE APPLIED ON HEX NUT: 7-10 IN LBS


7. SHOWS CABLE ENTRY DIMENSIONS.

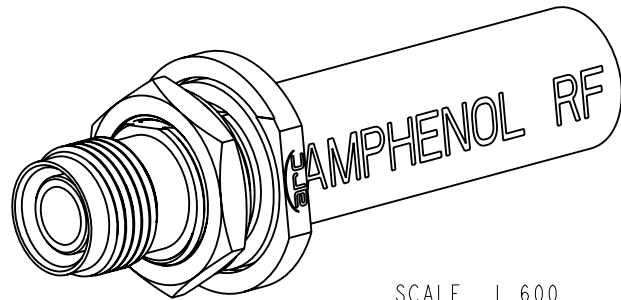


SCALE 1.600

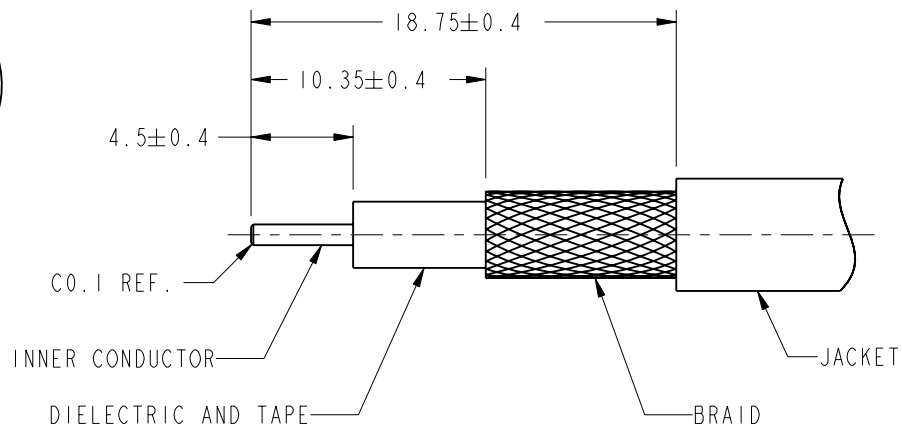

RECOMMENDED CABLE STRIPPING DIMENSIONS

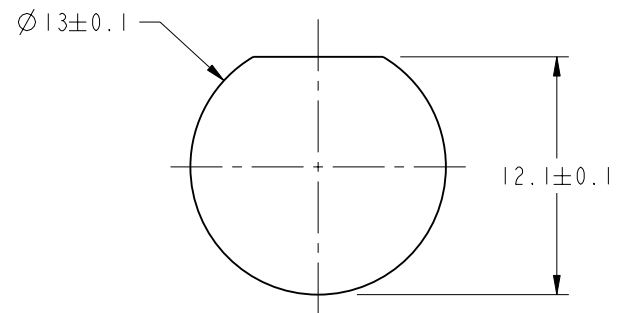

RECOMMENDED MOUNTING HOLE DIMENSIONS

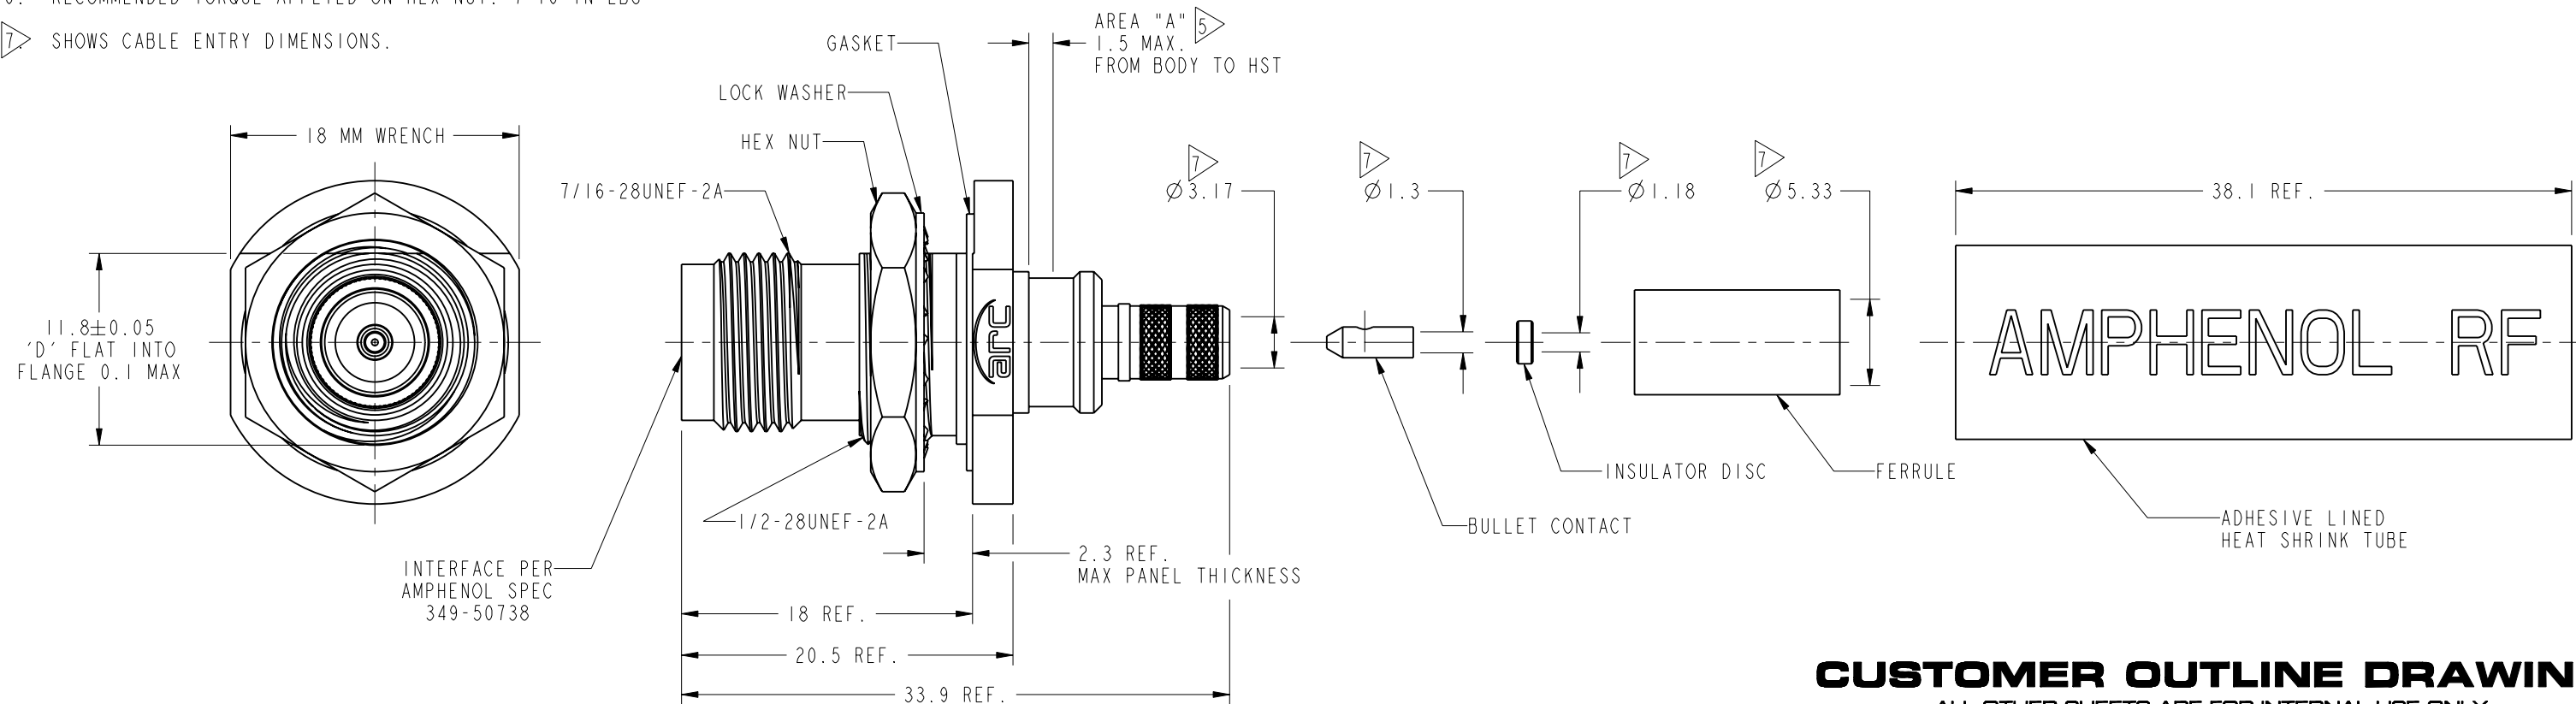

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°					MATERIAL SEE NOTES	DRAWN J.CHEN		DATE 30-Aug-13		TITLE TNC STR BHD JACK RP 1P-67 FOR LMR-200 CABLE		Amphenol RF www.amphenolrf.com	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.						ENGINEER D.DAVE		DATE 08-Sept-11					
						REFERENCE S.HSIEH		DATE 04-Sep-13		SCALE: 2.5:1.0		SHEET 2 OF 2	
						CONFIGURATION LEVEL:		CAD FILE		DWG SIZE B		REV B	
FINISH													DRAWING NO. 31-6508
												ITEM NO. 31-6508	
												PART NO. 31-6508	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru