
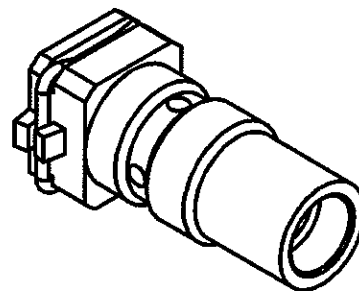



STRAIGHT FEMALE PLUG CRIMP TYPE


R210.087.000

CABLE 2.6/50 S

Series : MMT

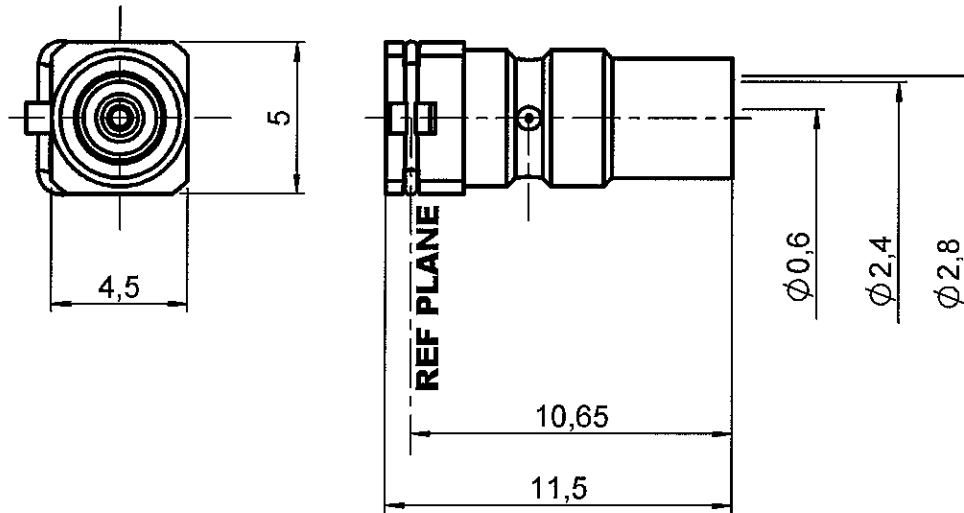

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0605 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT FEMALE PLUG CRIMP TYPE**R210.087.000****CABLE 2.6/50 S**

Series : MMT

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.1 + 0,0500	x F(GHz) Maxi
Insertion loss	.2	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating	170	Veff Maxi
Dielectric withstanding voltage	500	Veff mini
Insulation resistance	5000	M Ω mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	2,00	2,90	5,60	0,00	3,60	0,00

Assembly instruction :

Recommended cable(s)

RG 316

KX 22A

RG 188

Cable retention

- pull off

40 N mini

- torque

NA N.cm

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	8 N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

TOOLING

Part Number	Description	Hexagon
R282.271.000	CRIMPING TOOL	hex:3.25 square 0.72

Recommended torque

Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	500 Cycles mini
Weight	0,9118 g

OTHERS CHARACTERISTICS

accouplt : 18 N max / desacc.: 7 N min

ENVIRONMENTAL

Operating temperature	-55/+100 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

Issue : 0605 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL®**

STRAIGHT FEMALE PLUG CRIMP TYPE


R210.087.000

CABLE 2.6/50 S


Series : MMT

COMPONENTS

CENTER CONTACT




BODY



We recommend a thermal preconditioning cable.


STRIPPING DIMENSIONS



« Procedure interne. Seuls les connecteurs câblés par RADIALl sont garantis. »
 « Internal procedure. Only plugs assembled by RADIALl are under guarantee »


1

Strip the cable.
 Slide the center contact on until it bottoms against the cable dielectric.
 Crimp the center contact with crimping tool (see connector TDS).

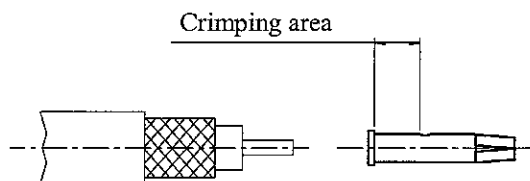

2

Crimp the body with crimping tool (see connector TDS).



Issue : 0605 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALl**®

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru