

“High Frequency Ceramic Solutions”

890 MHz Filtered Directional Coupler

P/N 0898CF15A035

Detail Specification Page 1 of 3



Revised 09/17/01

Part Number	Frequency (MHz)	Insertion Loss	Return Loss	Attenuation (min.)		Coupling	Isolation
				2 x Fo	3 x Fo		
0898CF15A035_	880 - 915	0.7 dB max	14 dB min.	22 dB	17 dB	20 ± 1.0 dB	25.0 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	4000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

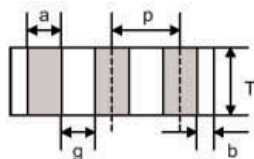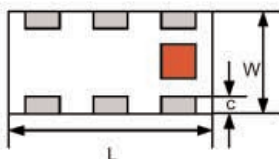


Terminal Configuration




1	IN	4	Termination
2	GND	5	GND
3	Main Out	6	Coupled Out



Mounting Considerations

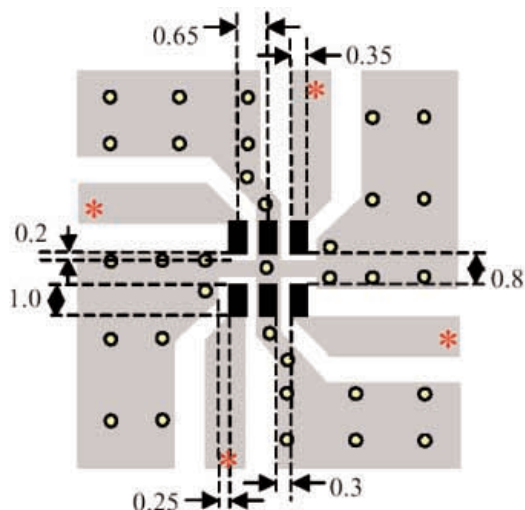Mount these devices with brown colored side facing up. Line width should be designed to provide 50Ω impedance matching characteristics.



-  Solder Resist
-  Land
-  Through-hole (ϕ 0.3)

*Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.*


“High Frequency Ceramic Solutions”

890 MHz Filtered Directional Coupler


P/N 0898CF15A035

Detail Specification Page 2 of 3

P/N 0898CF15A035 Filtered Coupler
Typical Coupling & Isolation

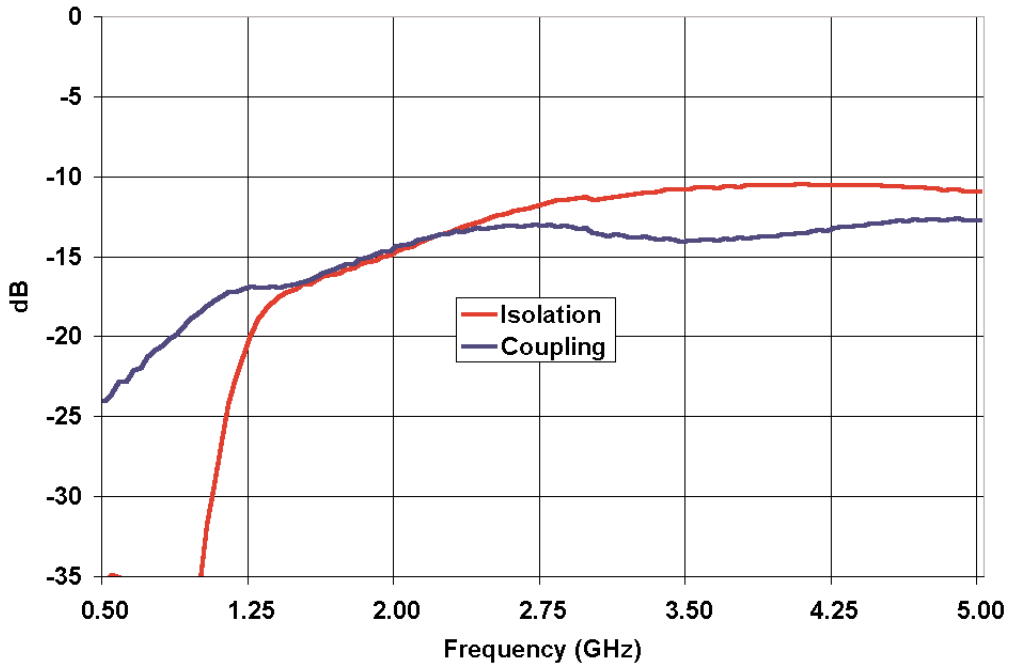

P/N 0898CF15A035 Filtered Coupler
Return Loss

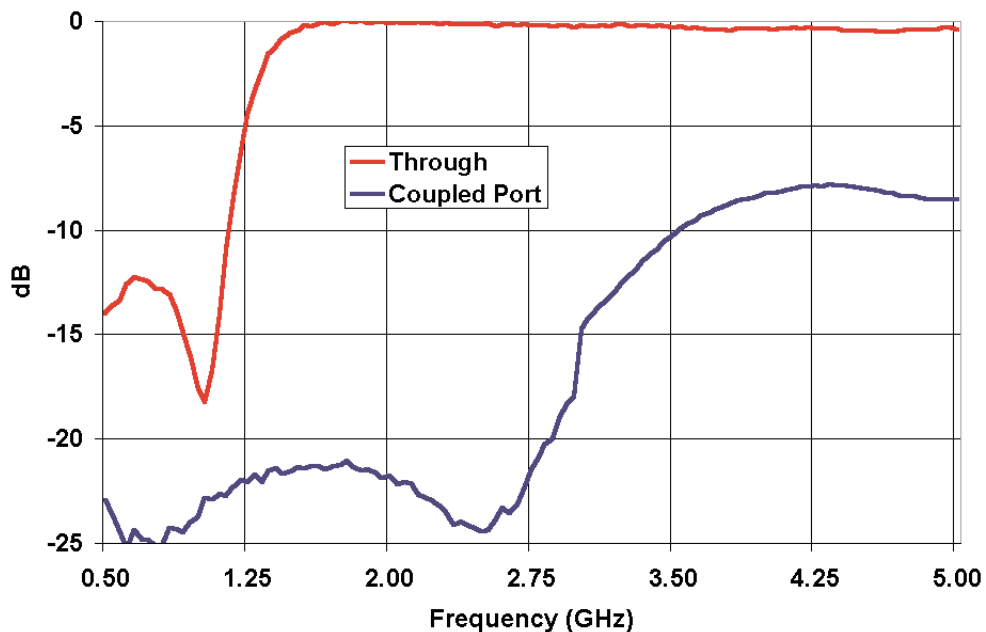


“High Frequency Ceramic Solutions”

890 MHz Filtered Directional Coupler

P/N 0898CF15A035

Detail Specification Page 3 of 3

P/N 0898CF15A035 Filtered Coupler
Typical Insertion Loss (Dual Scale)

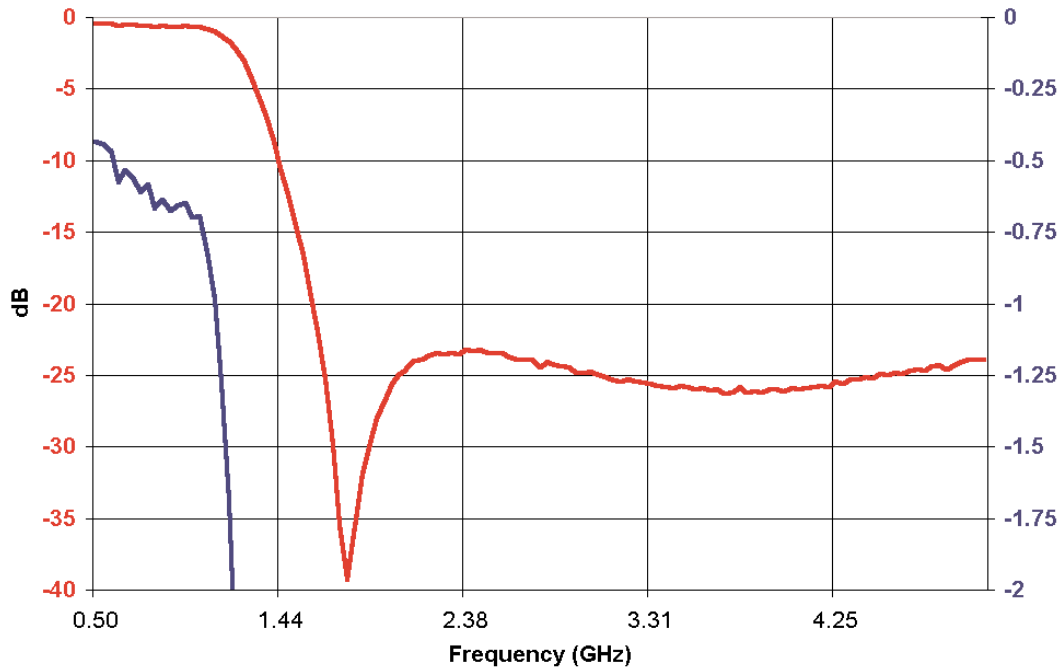

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru