

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 501)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0

-CONTACT MATERIAL: PHOSPHOR BRONZE,
GOLD OVER NICKEL

-ACCESSORIES: STEEL FOR METAL BRACKETS,
cadmium plated yellow passivation
THERMOPLASTIC UL94V0 FOR PLASTIC BRACKETS

BRASS FOR OTHERS ACCESSORIES,
cadmium plated yellow passivation

-SHELLS: STEEL,cadmium plated yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A

-CONTACT RESISTANCE: <=7.3 m Ohms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

RETENTION AGAINST TORQUE: -Threaded insert:0.7 N.m.min

-Female screw:0.5 N.m.min

Series

DBML25S500M

Shell size: **E A B C D**
(see sheet 3)

Front accessory definition
(see sheet 2)

Blank :without accessory
L :threaded insert M3
O :threaded insert UNC 4-40
V :female screw UNC 4-40

Layout of contacts (see sheet 3)

9,15,25,37,50

Contacts

S :Socket

Termination type

5 Right angle/Europe standard

Plating

00 Right angle 500 matings/unmatings



43 Right angle 500 matings/unmatings
for harsh environment

PCB accessories definition(see sheet 2)

Blank :Plastic brackets

C :Without brackets


M :Metal brackets



25 WAY for Example

rev	acc no	dr	date
A	3506-0174	MPE	2006/11/14
B	3508-0014	MPE	2007/01/17
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com				surface - ☒ tolerance std			projection		mm		
				ISO 1302 ISO 406 ISO 1101							
				TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M	PESSON	2006/11/14	ANGULAR	LINEAR	0.X	±0.3	size	A2	Scale	
Eng	P	LEGARE	2006/11/14			0.XX	±0.1				
Chr	P	LEGARE	2006/11/14	0° ±2°		0.XXX	±0.05	ECN	LS08-0014		
Appr	P	LEGARE	2006/11/14	Product family			Spec ref				
				SUB FEMALE DM HE501 series				001-8637-1736		Rev	
				with right angle contact						B	
catalog no								CUSTOMER		sheet 1 of 9	

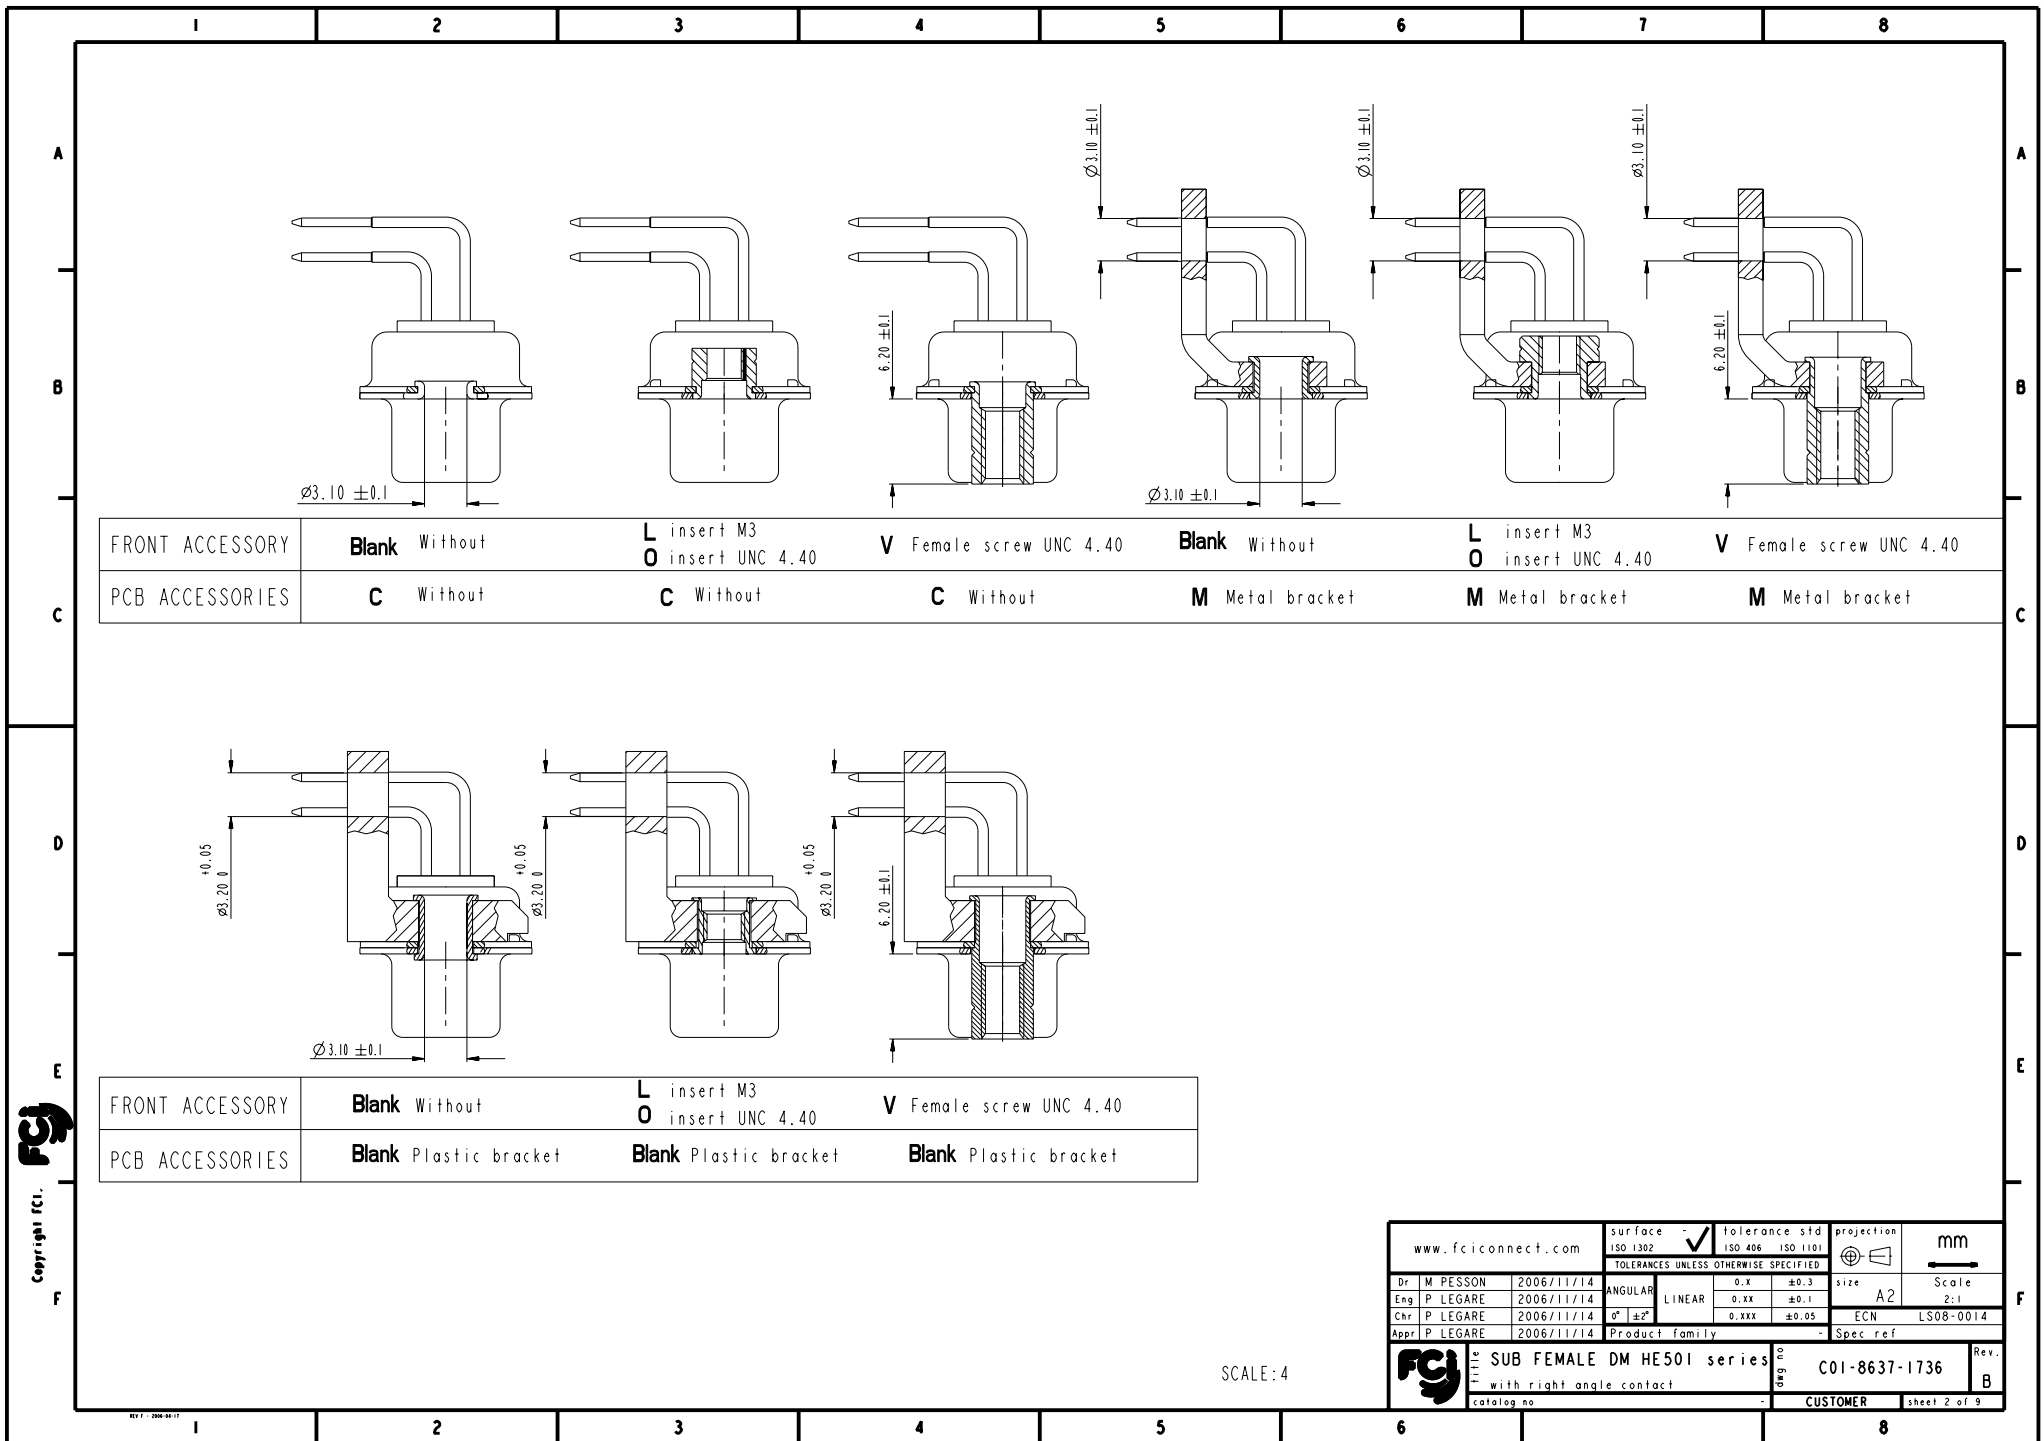

PART NUMBER	FRONT ACCESSORY	PCB ACCESSORY
D*MxxS500C	without	without
D*MLxxS500C	insert M3	without
D*MOxxS500C	insert UNC 4.40	without
D*MVxxS500C	female screw UNC 4.40	without
D*MxxS500M	without	Metal bracket
D*MLxxS500M	insert M3	Metal bracket
D*MOxxS500M	insert UNC 4.40	Metal bracket
D*MVxxS500M	female screw UNC 4.40	Metal bracket
D*MxxS500	without	Plastic bracket
D*MLxxS500	insert M3	Plastic bracket
D*MOxxS500	insert UNC 4.40	Plastic bracket
D*MVxxS500	female screw UNC 4.40	Plastic bracket

shell size	Contact number
X	XX
E	09
A	15
B	25
C	37
D	50

PART NUMBER	FRONT ACCESSORY	PCB ACCESSORY
D*MxxS543C	without	without
D*MLxxS543C	insert M3	without
D*MOxxS543C	insert UNC 4.40	without
D*MVxxS543C	female screw UNC 4.40	without
D*MxxS543M	without	Metal bracket
D*MLxxS543M	insert M3	Metal bracket
D*MOxxS543M	insert UNC 4.40	Metal bracket
D*MVxxS543M	female screw UNC 4.40	Metal bracket
D*MxxS543	without	Plastic bracket
D*MLxxS543	insert M3	Plastic bracket
D*MOxxS543	insert UNC 4.40	Plastic bracket
D*MVxxS543	female screw UNC 4.40	Plastic bracket

CROSS REFERENCES HE501 and FCI

HE501 P/N	FCI P/N	FRONT ACCESSORY	PCB ACCESSORY
HE501PxxVS6	D*MxxS500	without	Plastic bracket
HE501MxxVS6	D*MxxS500M	without	Metal bracket

www.fciconnect.com

Dr M PESSON2006/11/14

Eng P LEGARE2006/11/14

Chr P LEGARE2006/11/14

Appr P LEGARE2006/11/14

surface -
ISO 1302

☒TOLERANCES UNLESS OTHERWISE SPECIFIED

tolerance std
ISO 406 ISO 1101

0.X ±0.3
0.XX ±0.1
0.XXX ±0.05

projection
size A2

Scale 2:1

ECN LS08-0014

Product family -

Spec ref

SUB FEMALE DM HE501 series
with right angle contact
catalog no

deg no
C01-8637-1736

Rev.
B

CUSTOMER





sheet 3 of 9

Copyright FCI


DIMENSION FOR SHELL E,A,B,C WITHOUT BRACKET

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0.76} ₋₀	B ^{+0.25} ₋₀	C ± 0.12	F ^{+0.57} ₋₀	G ^{+0.25} ₋₀	H ^{+0.51} ₋₀
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

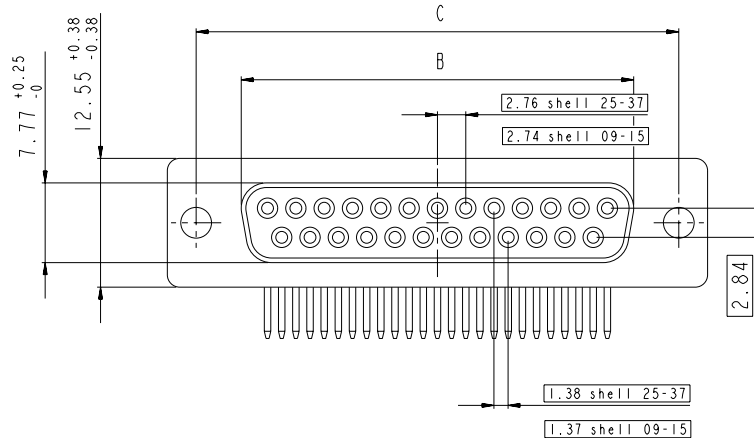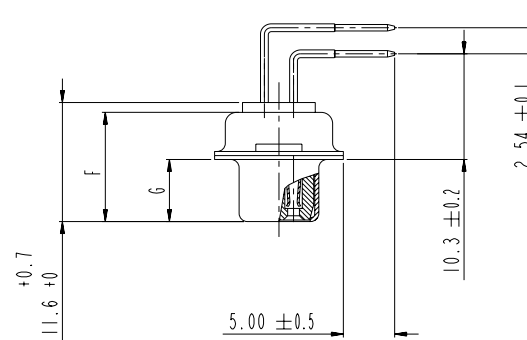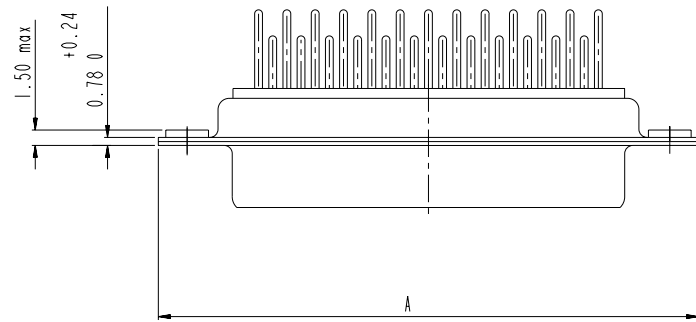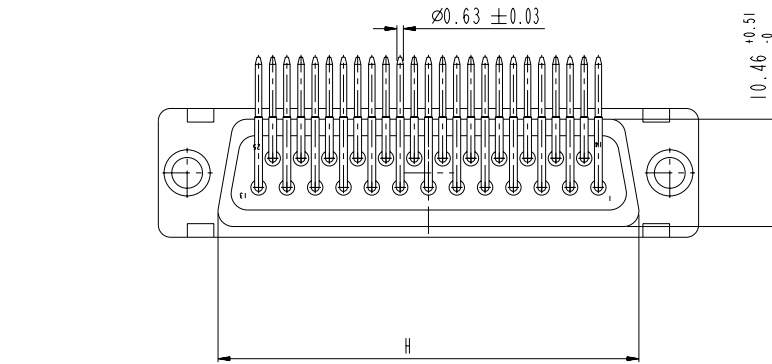

LAYOUT DIMENSIONS

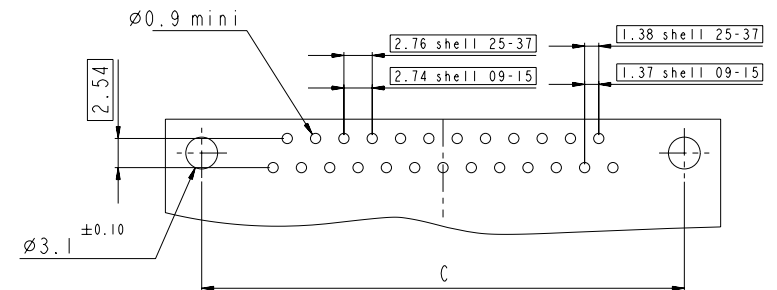





SCALE: 3

www.fciconnect.com			surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	M. PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	A2	Scale	2:1
Eng	P. LEGARE	2006/11/14	LINEAR	0.XX	±0.1	ECN	LS08-0014		
Chr	P. LEGARE	2006/11/14	0° ± 2°	0.XXX	±0.05	Spec ref			
Appr	P. LEGARE	2006/11/14	Product family						
SUB FEMALE DM HE501 series			with right angle contact			C01-8637-1736			
catalog no			CUSTOMER			sheet 4 of 9			


DIMENSION FOR SHELL E,A,B,C WITH METAL BRACKET

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0.76} ₋₀	B ^{+0.25} ₋₀	C ± 0.12	F ^{+0.57} ₋₀	G ^{+0.25} ₋₀	H ^{+0.51} ₋₀
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

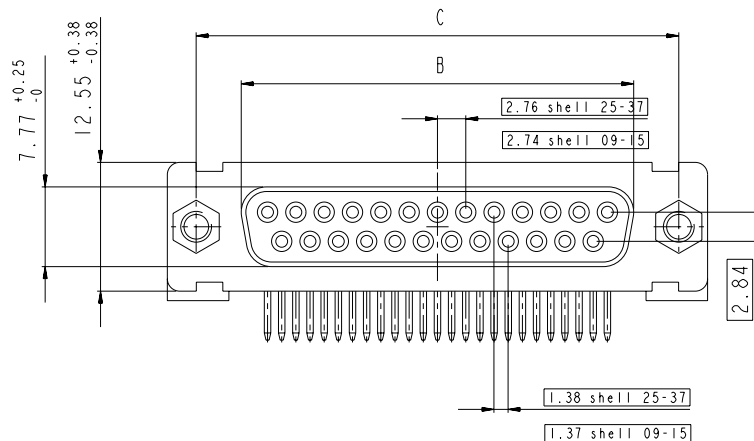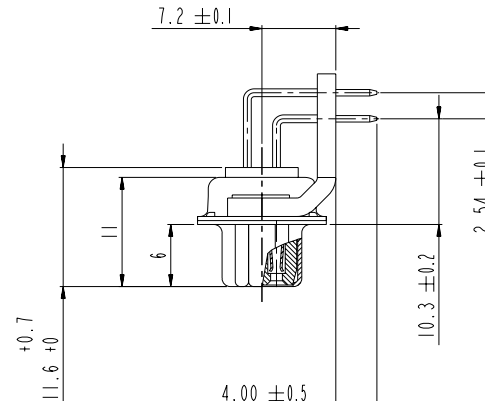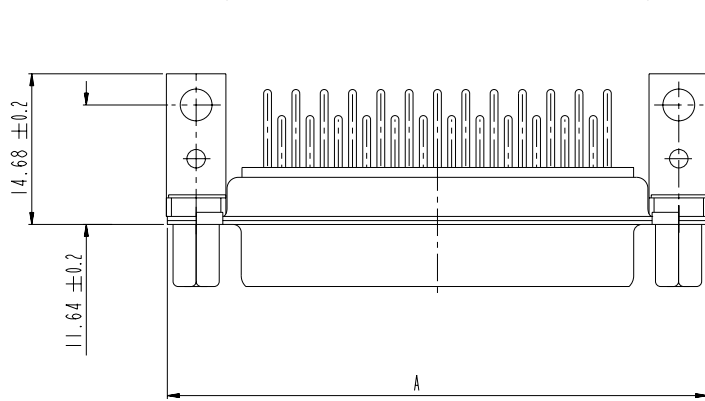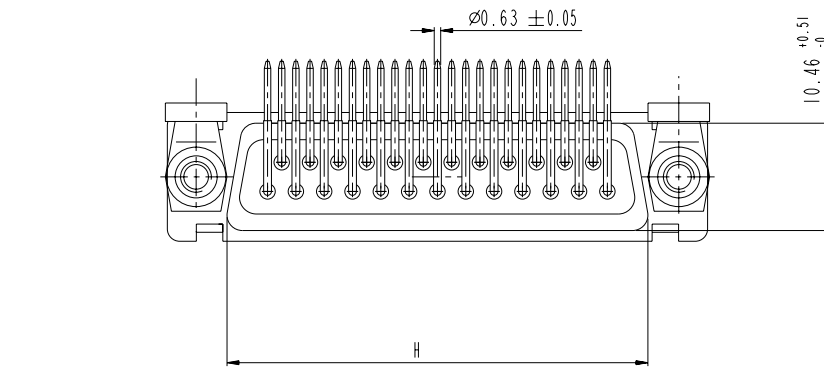






LAYOUT DIMENSIONS

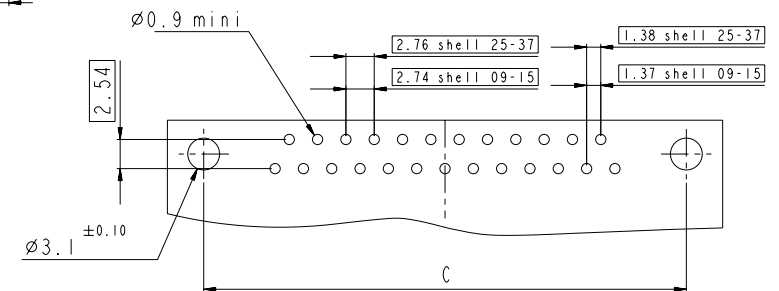


SCALE: 3

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2006/11/14	ANGULAR	LINEAR	0.X	± 0.3	size A2	Scale 2:1	ECN LS08-0014
Eng	P LEGARE	2006/11/14			0.XX	± 0.1			
Chr	P LEGARE	2006/11/14	$0^{\circ} \pm 2^{\circ}$		0.XXX	± 0.05			
Appr	P LEGARE	2006/11/14	Product family				Spec ref		
			SUB FEMALE DM HE501 series				C01-8637-1736		Rev. B
with right angle contact			deg no				CUSTOMER		sheet 5 of 9
catalog no									

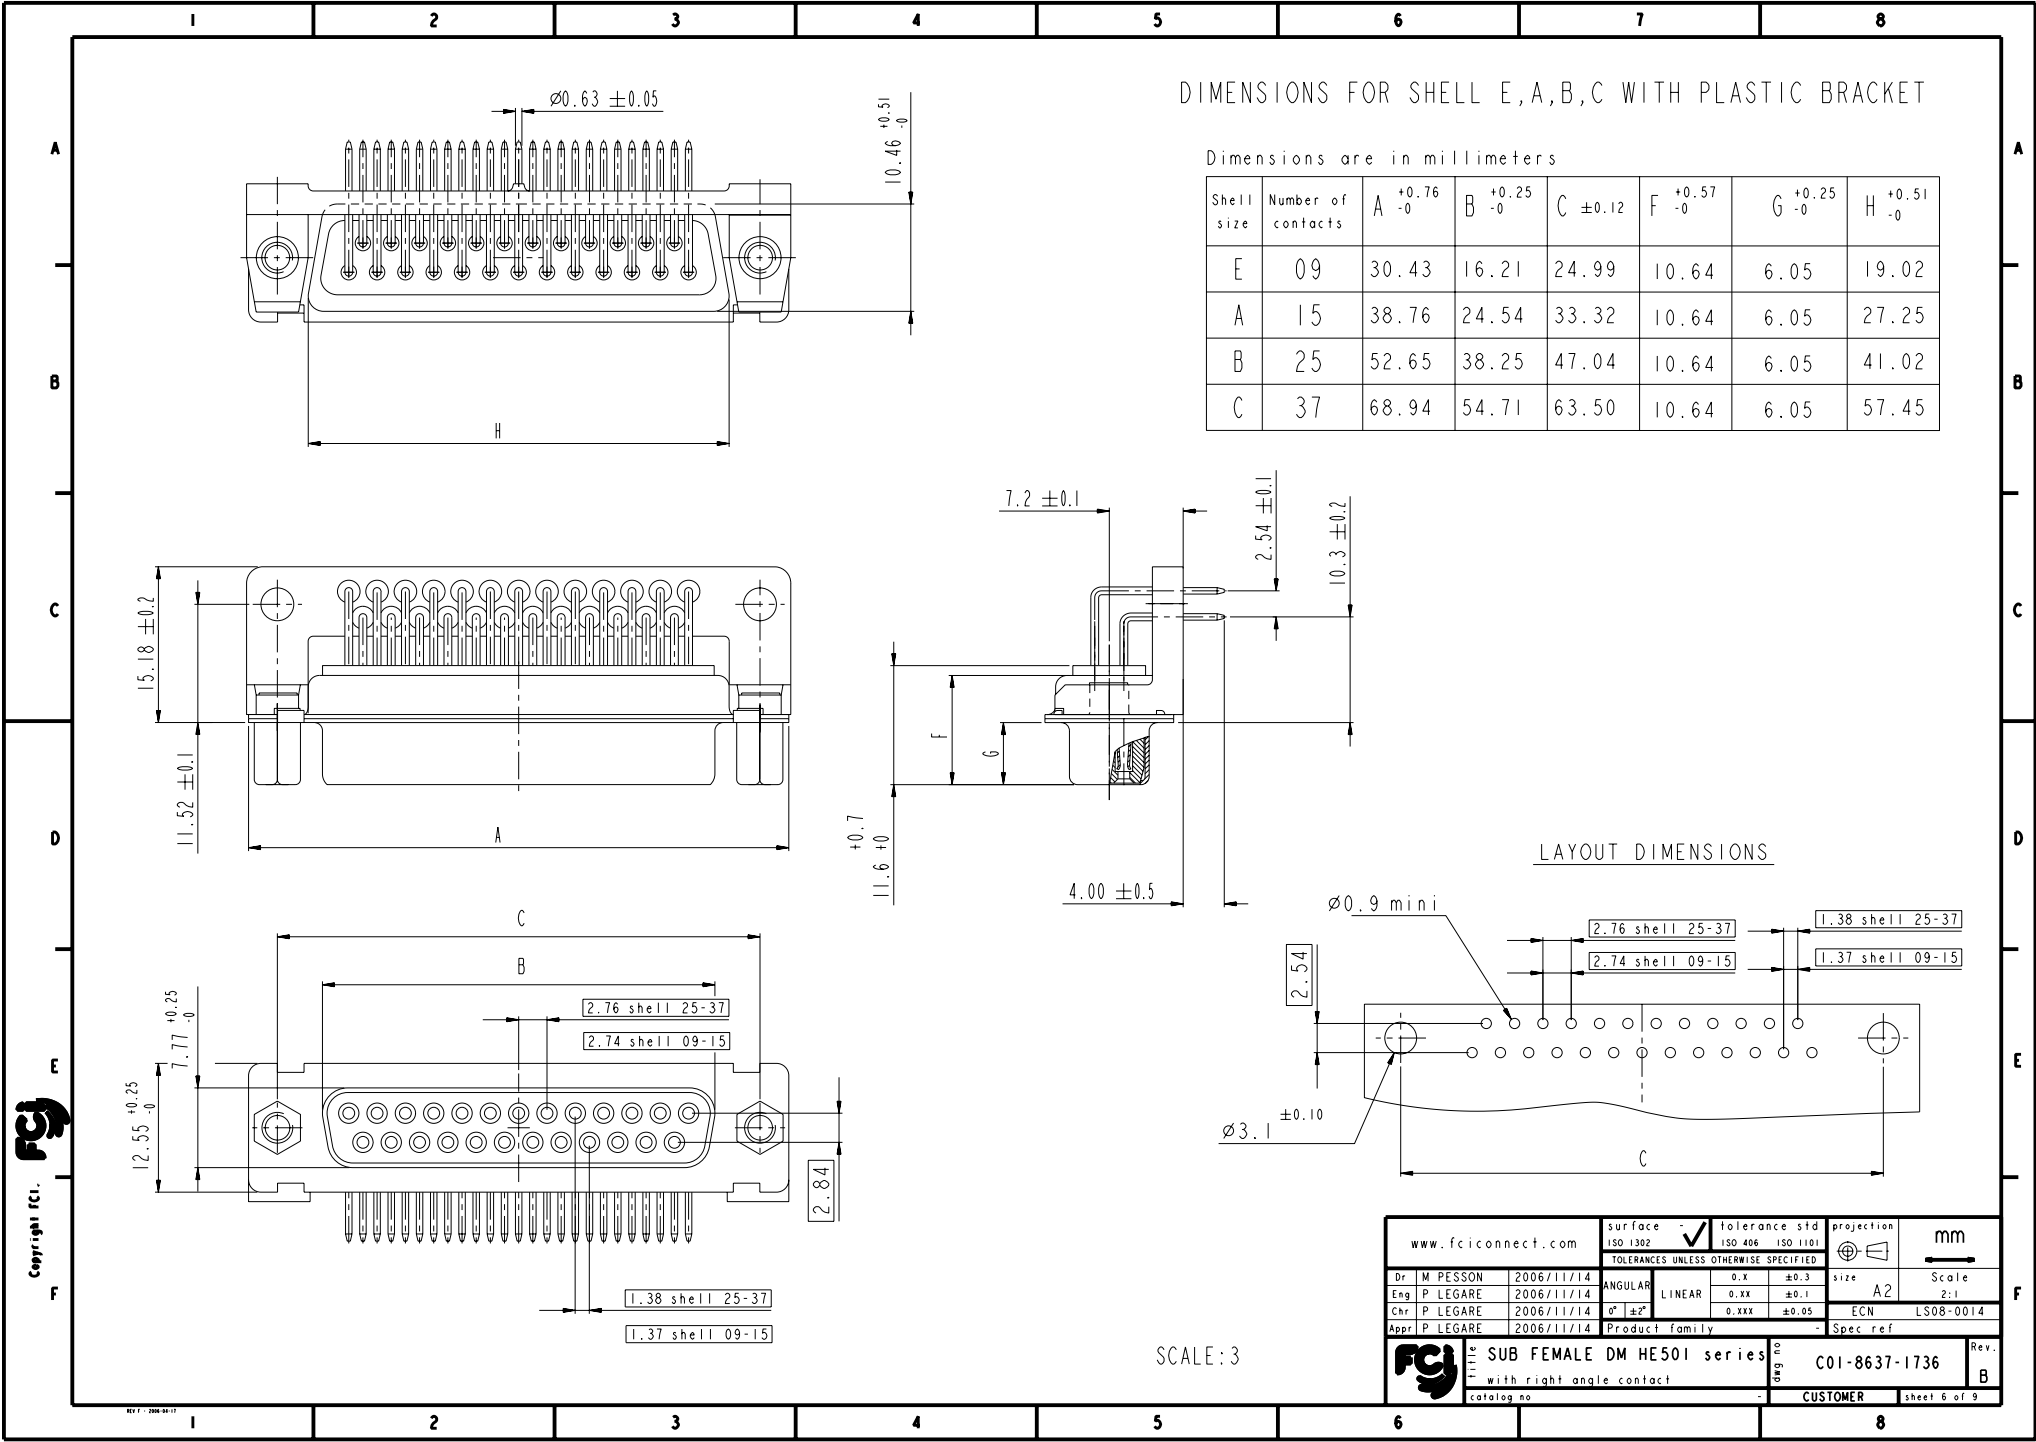

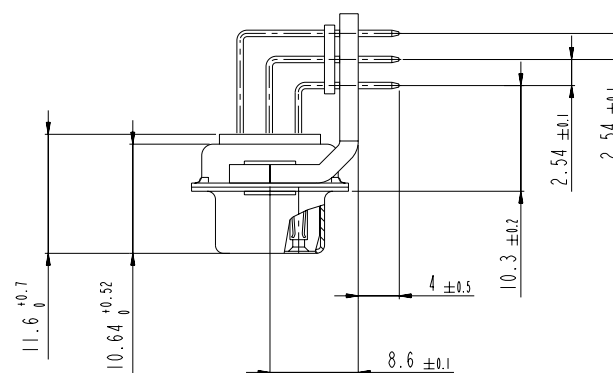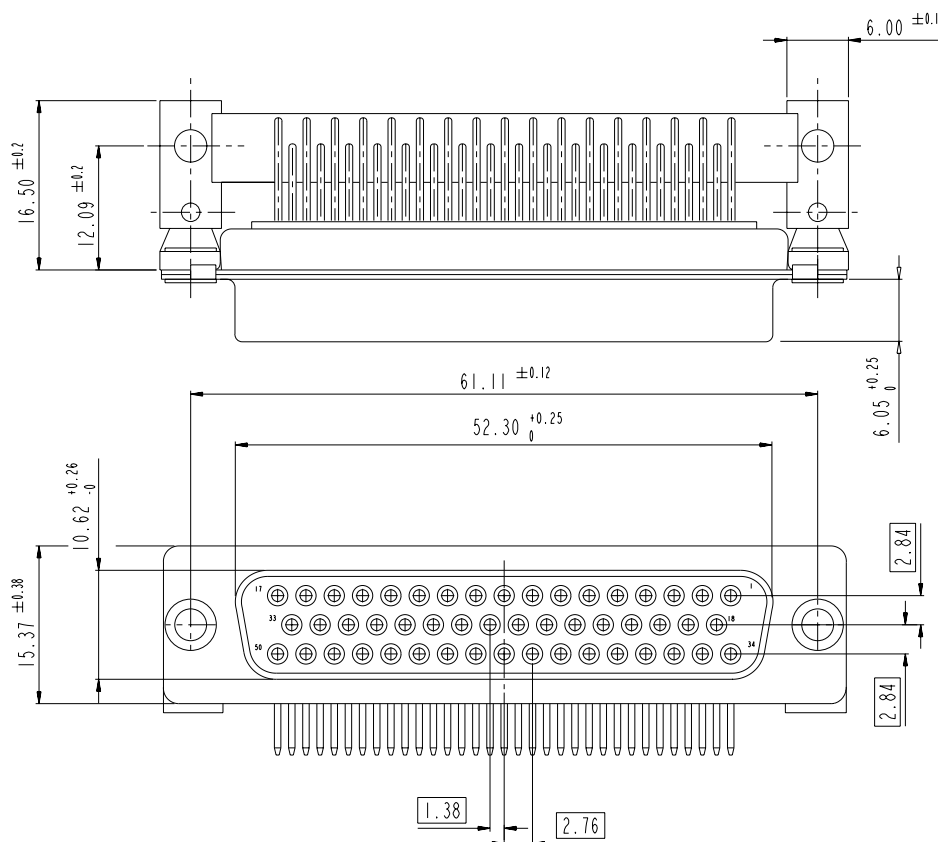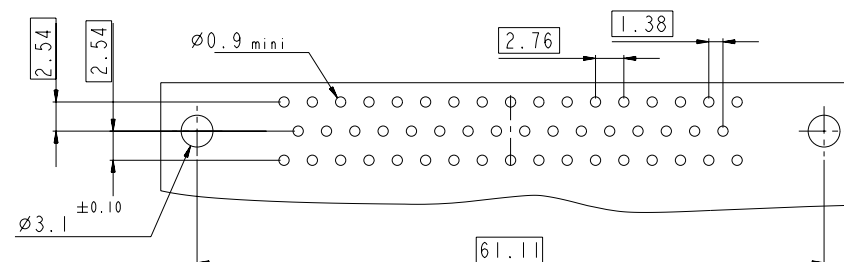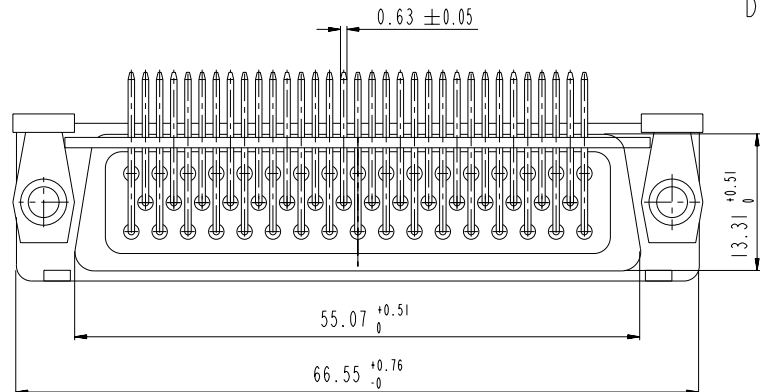

www.fciconnect.com			surface ☒ tolerance std 150 1302 150 406 150 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	M	PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	2:1
Eng	P	LEGARE	2006/11/14	LINEAR	0.XX	±0.1	A2	Scale
Chr	P	LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05	ECN	LS08-0014
Appr	P	LEGARE	2006/11/14	Product family		-	Spec ref	
				title SUB FEMALE DM HE501 series with right angle contact catalog no.		dag no. C01-8637-1736 CUSTOMER		Rev. B sheet 8 of 9

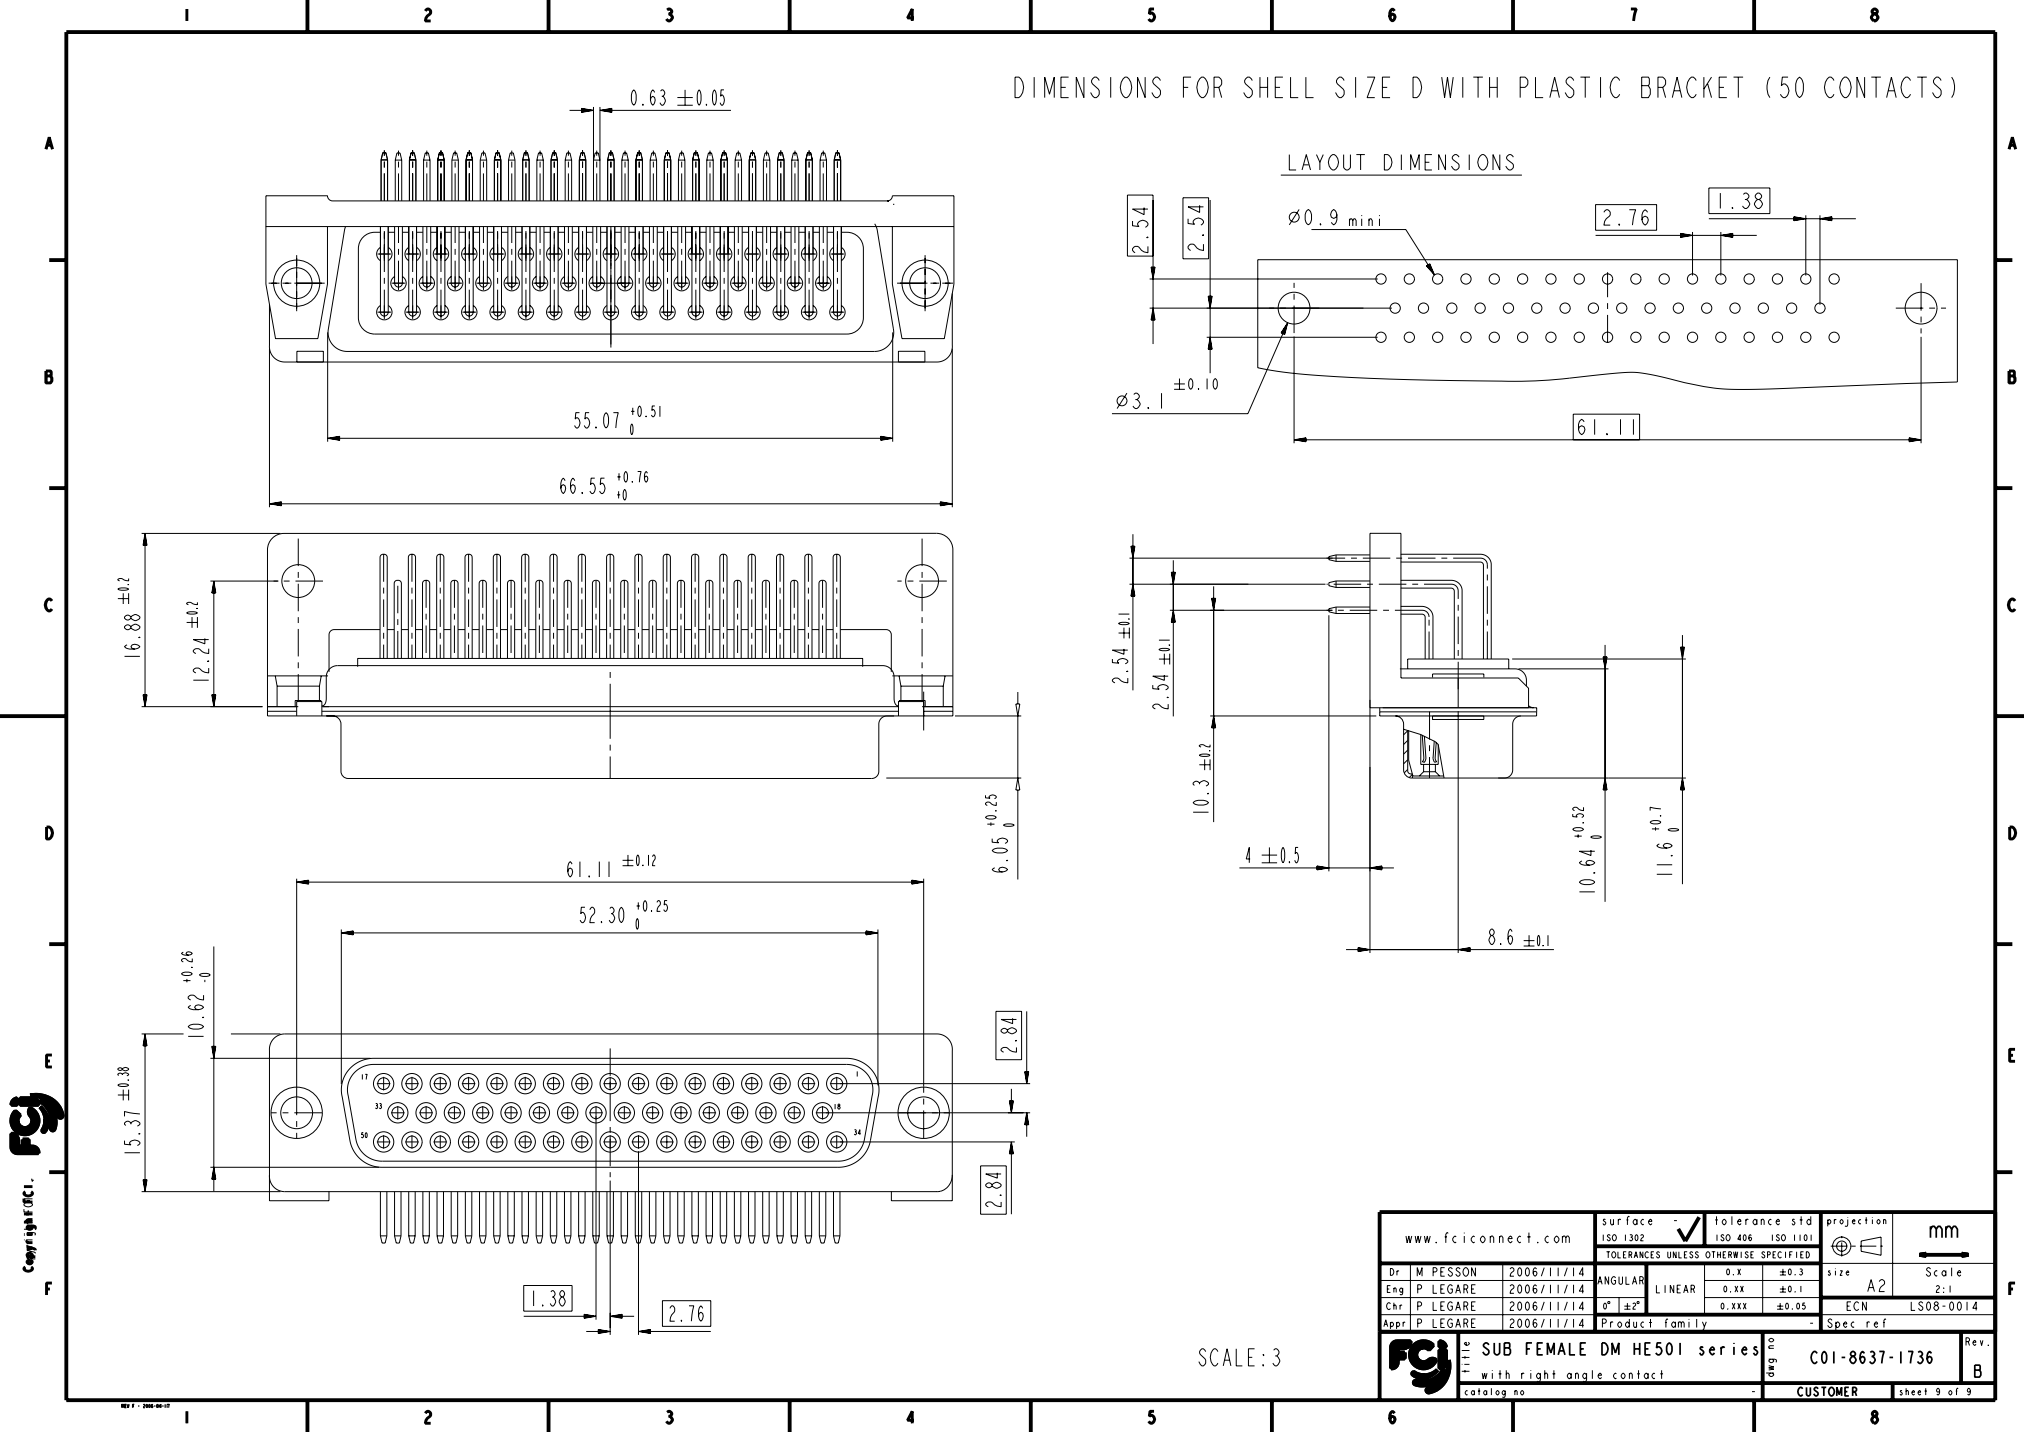

DIMENSIONS FOR SHELL SIZE D WITH PLASTIC BRACKET (50 CONTACTS)

LAYOUT DIMENSIONS

SCALE:3

www.fciconnect.com			surface ☒ ISO 1302			tolerance std ☒ ISO 406 ☐ ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED												
Dr	M PESSON	2006/11/14	ANGULAR	0.X ±0.3		size	A2		Scale 2:1			
Eng	P LEGARE	2006/11/14	LINEAR	0.XX ±0.1		ECN	LS08-0014					
Chr	P LEGARE	2006/11/14		0° ±2° 0.XXX ±0.05								
Appr	P LEGARE	2006/11/14	Product family			Spec ref						
			SUB FEMALE DM HE501 series				C01-8637-1736			Rev. B		
			with right angle contact				CUSTOMER			sheet 9 of 9		
catalog no												

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru