

C5	REVISED PER ECO-18-018834
C6	REVISED PER ECO-17-007191

MATERIALS:
 BASE: PPS UL94V-O
 COVER: PPS UL94V-O
 ACTUATOR: LCP UL94V-O
 MOVING CONTACT: COPPER ALLOY, GOLD OVER NICKEL PLATE
 FIXED CONTACT/TERMINAL: COPPER ALLOY, GOLD OVER NICKEL PLATE

CONTACT RATING: NON-SWITCHING 100mA @ 50 VDC
SWITCHING: 25mA @ 24 VDC.

INITIAL CONTACT RESISTANCE: 100mΩ MAX. @ 2 VDC, 10 mA.
INSULATION RESISTANCE: 100 MEGOHMS MIN. @ 100 VDC.
DIELECTRIC STRENGTH: 300 VAC. 1 MINUTE.
LIFE: 1,000 CYCLES.


OPERATING FORCE: 600G MAX.

OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C).
STORAGE TEMPERATURE: -49°F TO +212°F (-45°C TO +100°C).
SOLDER HEAT RESISTANCE PER 109-201, CONDITION B
SOLDERABILITY PER JIS C 0050 & JIS C 0053

- | | |
|---|---|
| 1 | PARTS WITH 'ON' SUFFIX SUPPLIED IN THE ON POSITION. |
| 2 | SUPPLIED WITH TAPE SEAL STANDARD. |
| 3 | FOR TAPE AND REEL PACKAGING— PART NO. GDHXXSTR
SEE MODEL NUMBER CHART BELOW. |
| 4 | FOR NO SEAL OPTION = NS. |
| 5 | ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE
2002/95/EC OF 27 JAN 2003 (ROHS) |
| 6 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

		6.35[.250]	8.74[.344]	6	TAPE	GDH06STRON04	1-1571983-7	
		11.43[.450]	13.82[.544]	10	NONE	GDH010STRNS04	1-1571983-6	
		1.27[.050]	3.66[.144]	2	TAPE	GDH02STRON04	1-1571983-5	
		11.43[.450]	13.82[.544]	10	TAPE	GDH010STR04	1-1571983-4	
		11.43[.450]	13.82[.544]	10	TAPE	GDH010S04	1-1571983-3	
		 OBSOLETE	8.89[.350]	11.28[.444]	8	NONE	GDH08STRNS04	1-1571983-2
8.89[.350]	11.28[.444]		8	TAPE	GDH08STR04	1-1571983-1		
8.89[.350]	11.28[.444]		8	TAPE	GDH08S04	1-1571983-0		
6.35[.250]	8.74[.344]		6	TAPE	GDH06STR04	1571983-9		
		6.35[.250]	8.74[.344]	6	TAPE	GDH06S04	1571983-8	
		3.81[.150]	6.20[.244]	4	TAPE	GDH04STRON04	1571983-7	
		 OBSOLETE	3.81[.150]	6.20[.244]	4	NONE	GDH04STRNS04	1571983-6
			3.81[.150]	6.20[.244]	4	TAPE	GDH04STR04	1571983-5
		3.81[.150]	6.20[.244]	4	TAPE	GDH04S04	1571983-4	
		1.27[.050]	3.66[.144]	2	TAPE	GDH02STR04	1571983-3	
		  OBSOLETE	1.27[.050]	3.66[.144]	2	TAPE	GDH02SON04	1571983-2
			1.27[.050]	3.66[.144]	2	TAPE	GDH02S04	1571983-1
		M	L	POLE	SEAL	OLD T&B P/N	PART NUMBER	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BROWN		15MAR05		 TE Connectivity	
		CHK M. SARVER		15MAR05			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. SARVER		NAME	
		0 PLC ± -		PRODUCT SPEC		DIP SWITCH GDH SERIES	
		1 PLC ± -		—			
		2 PLC ± 0.25 [0.010]		APPLICATION SPEC			
		3 PLC ± -		—		SIZE	
		4 PLC ± -		—		CAGE CODE	
		ANGLES ± 1°		WEIGHT —		DRAWING NO	
MATERIAL		FINISH		A2		00779	
—		—		CUSTOMER DRAWING		C-1571983	
						RESTRICTED TO	
						—	
						SCALE 8:1	
						SHEET 1 of 2	
						REV C6	

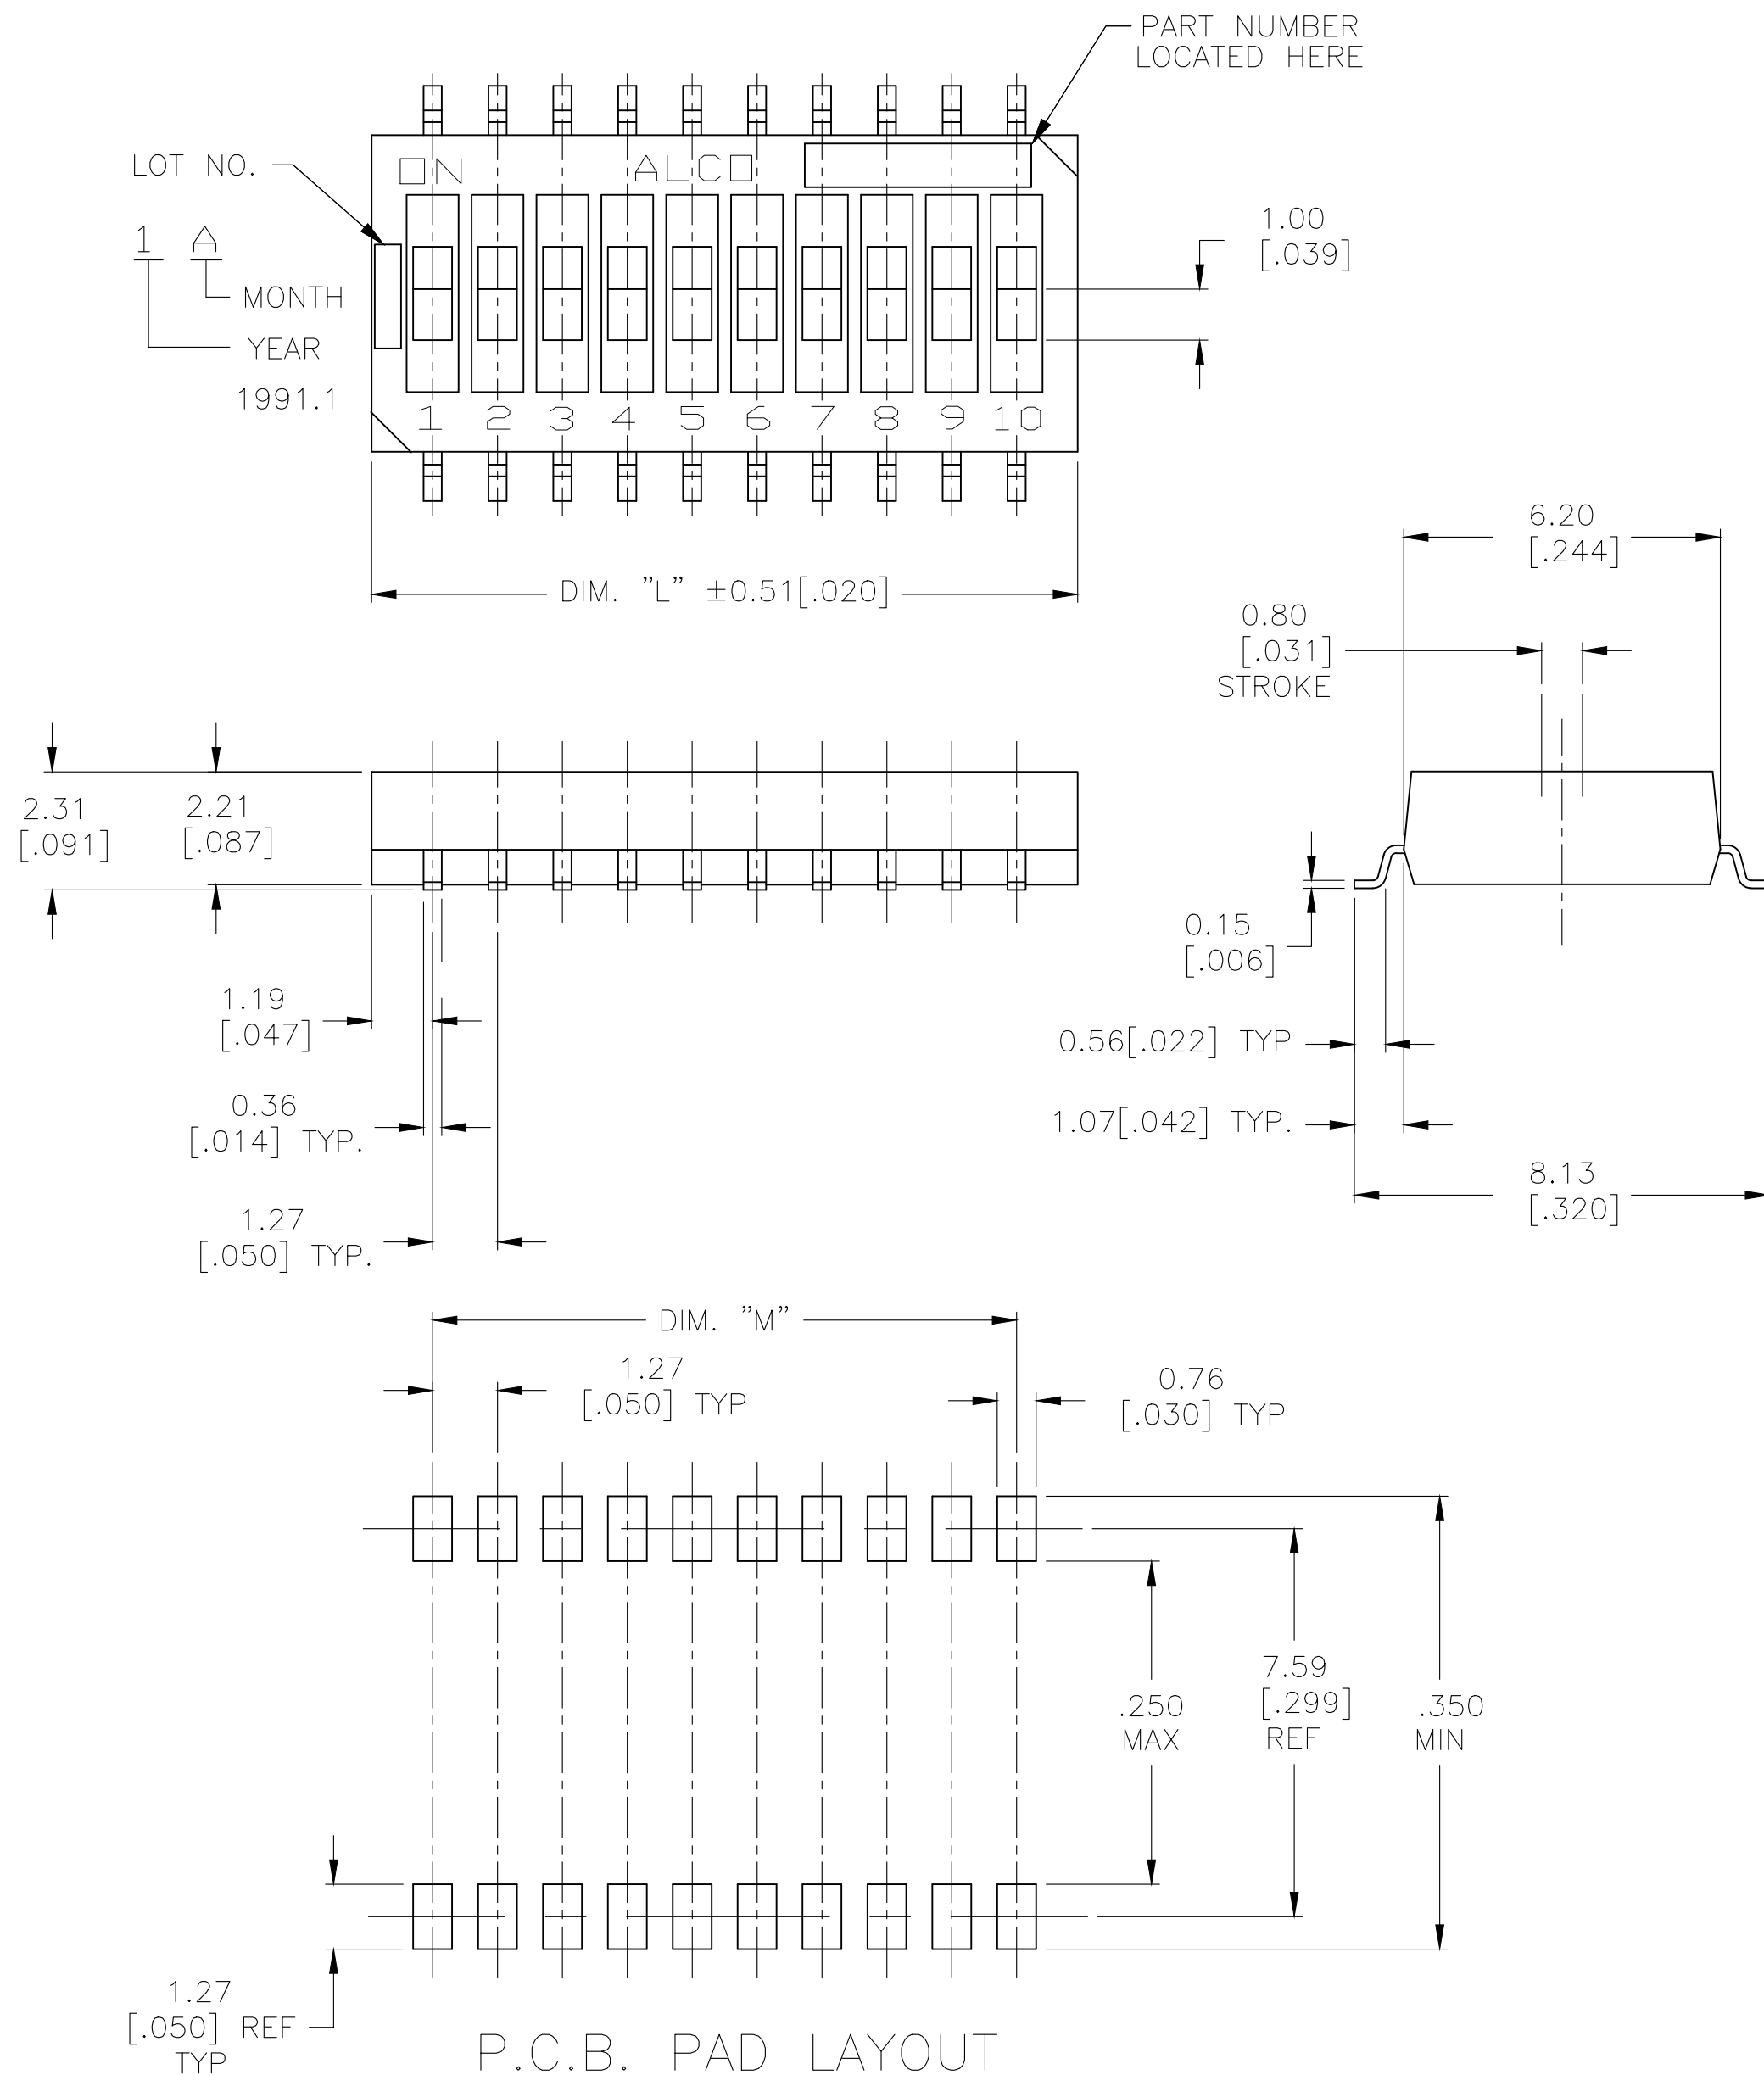

P.C.B. PAD LAYOUT

PCB LAYOUT TOLERANCES $\pm .002$
ON ALL DIMENSIONS

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

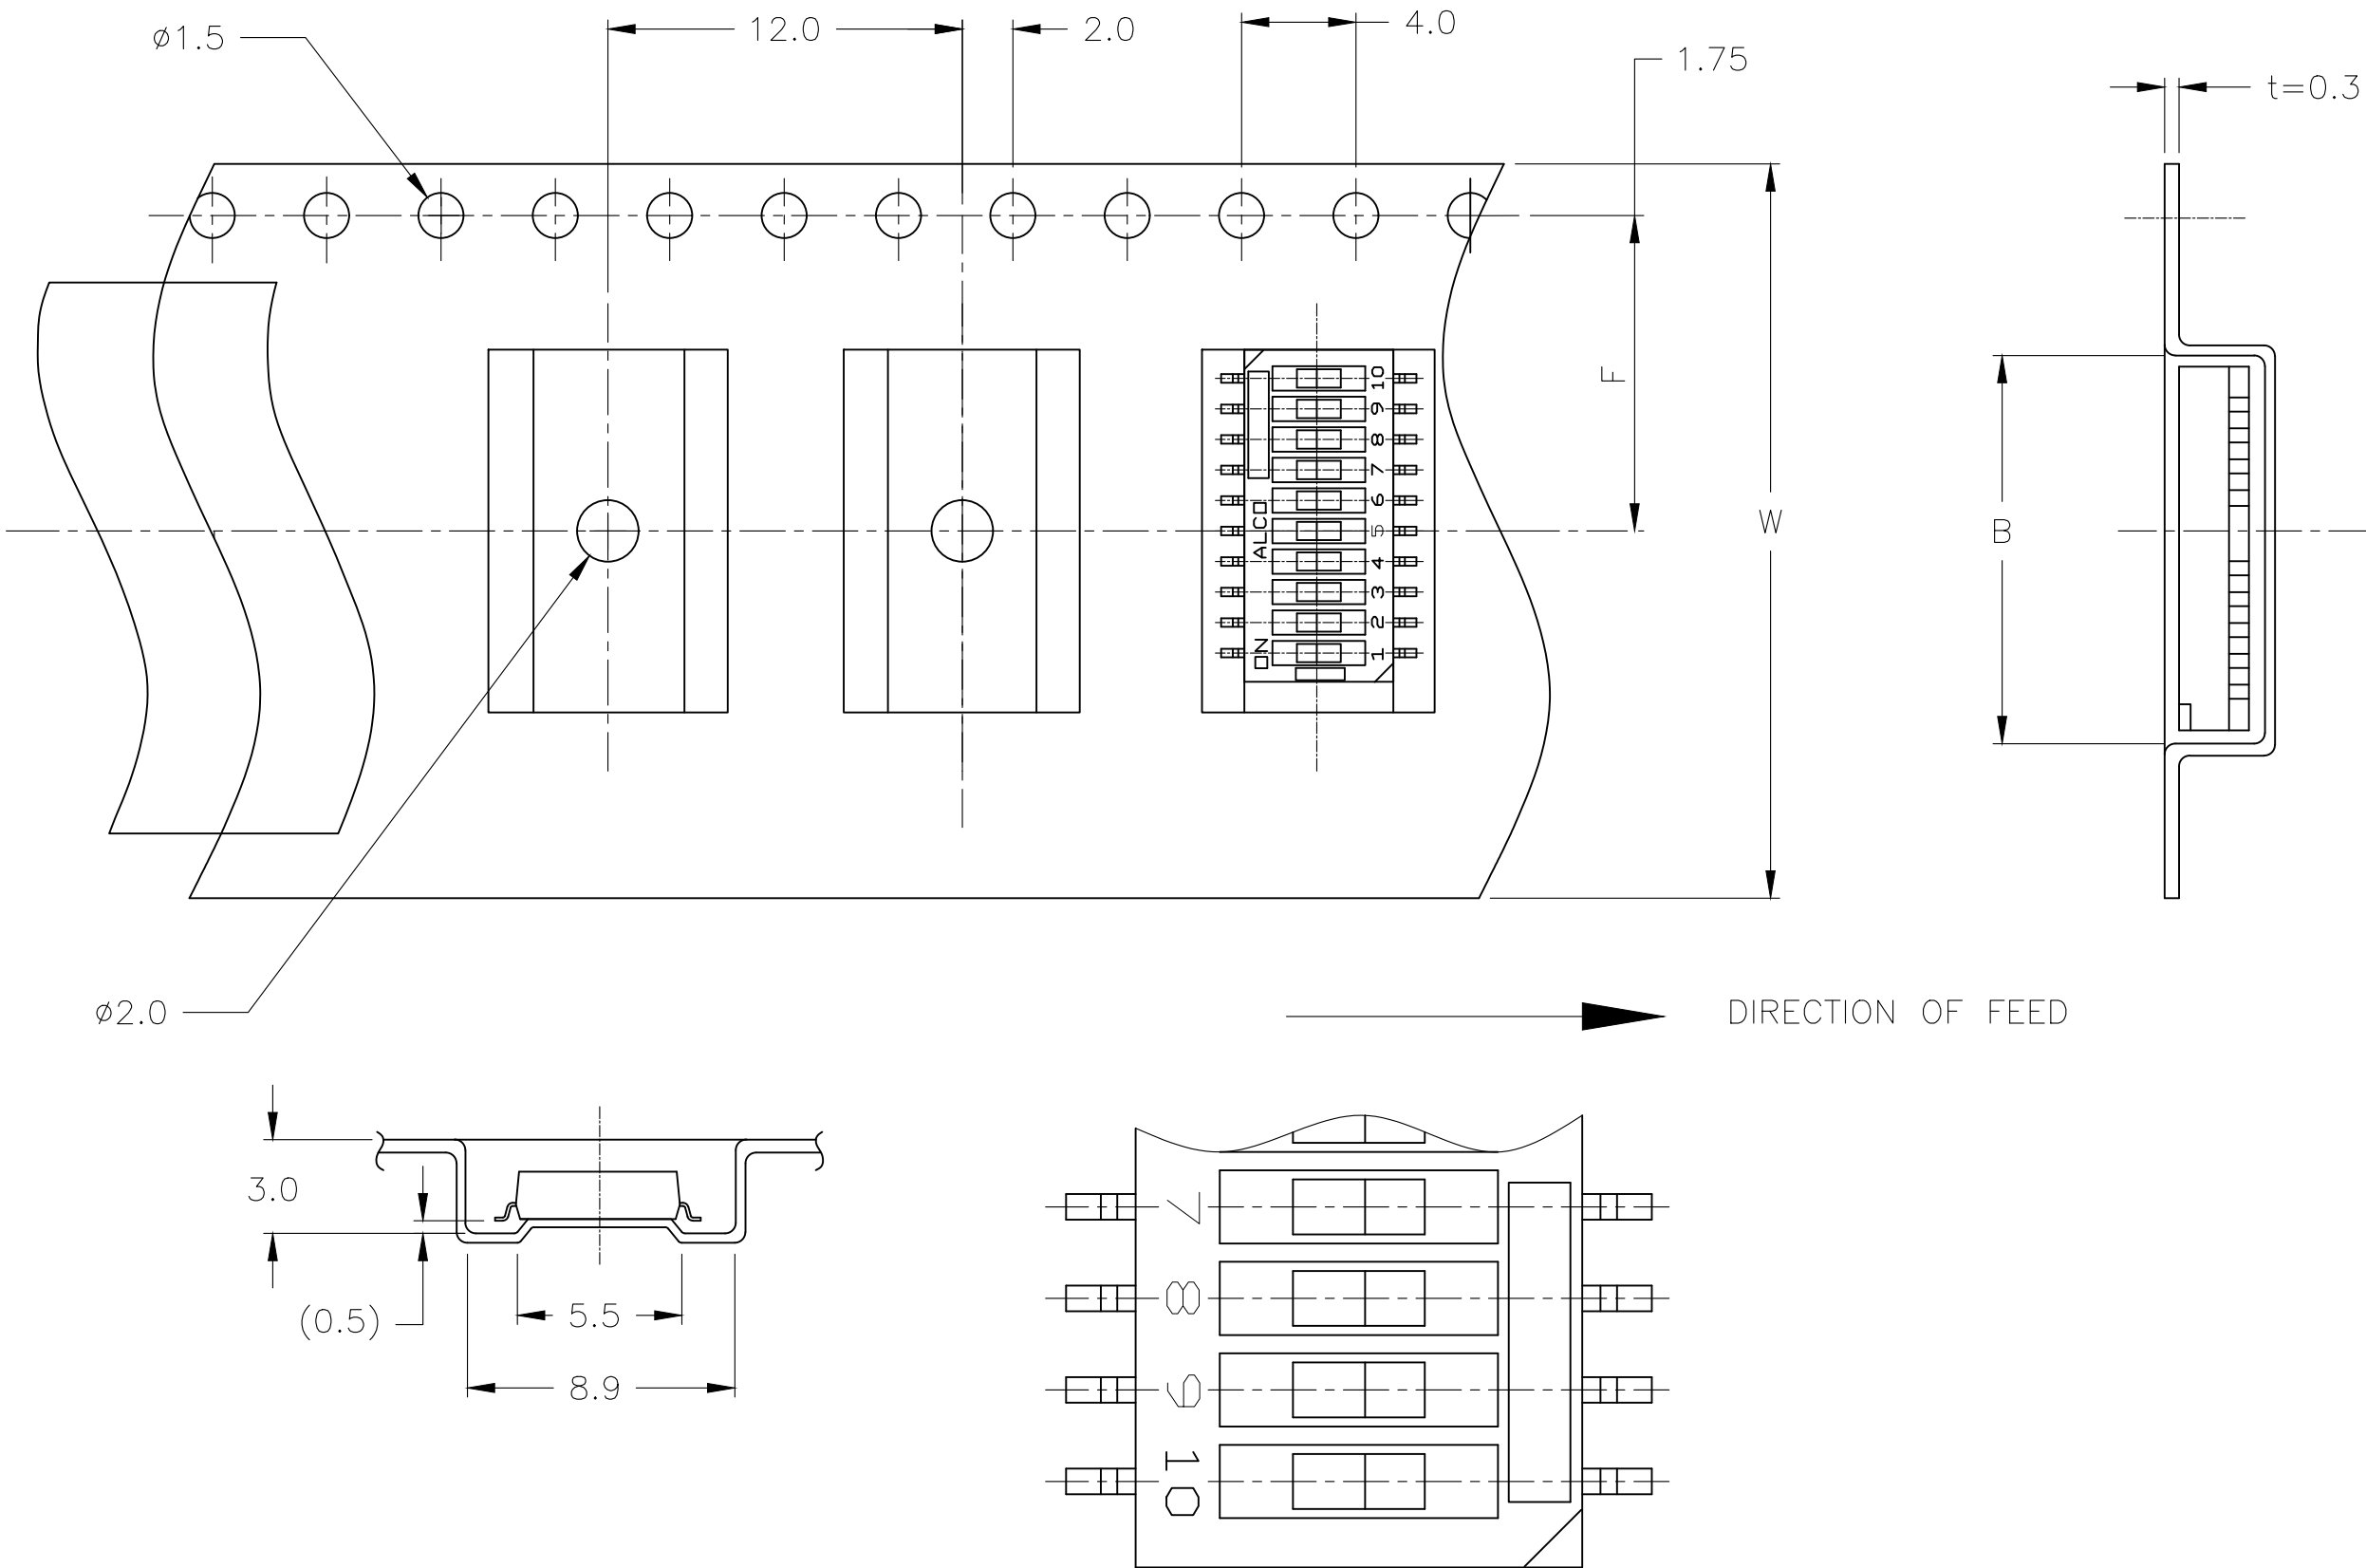

NO.OF POS.	DIMENSION		
	W	F	B
2P	16.0	7.5	4.45
4P			7.0
6P			9.55
8P	24.0	11.5	12.1
10P			14.6

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R BROWN
15MAR05

CHK
M SARVER
15MAR05

APVD
M SARVER
15MAR05

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.25 [.010]
3 PLC ± -
4 PLC ± -
ANGLES ± 1°

MATERIAL
-

FINISH
-

PRODUCT SPEC
APPLICATION SPEC

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
DIP SWITCH
GDH SERIES

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1571983

RESTRICTED TO
-

SCALE
8:1

SHEET
2 OF 2

REV
C6

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru