


REV.	DATE	ECR NO	DESCRIPTION
A	12/29/00	--	MODIFY PLATING TO SILVER
B	12/27/05	--	MODIFY PLATING TO NEXCOTE / UPDATE DRAWING FORMAT
C	07/14/10	2073	UPDATED DESIGN

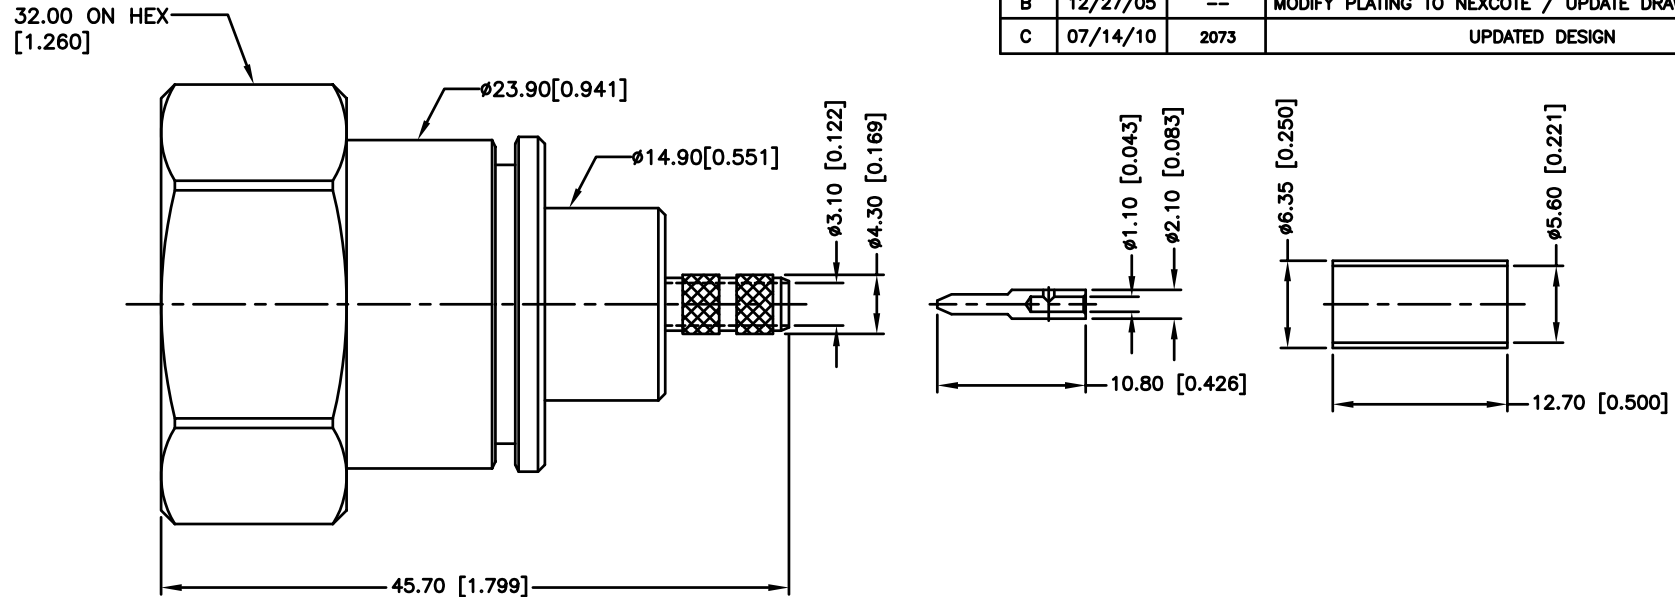

1. ELECTRIC PERFORMANCE IEC60169-4

NOMINAL IMPEDANCE(Ω)	: 50±2
FREQUENCY RANGE	: DC-3GHZ
VSWR	: ≤1.10
INSERT LOSS	: ≤0.05
INSULATION RESISTANCE(MΩ)	: >10000
PROOF VOLTAGE (V)	: 1500
CONDUCTOR RESISTANCE(MΩ)	: OUTER CONDUCTOR<0.2 INNER CONDUCTOR<0.8

2. MECHANICAL PERFORMANCE

NUT TORQUE	: 25N.m
(NUT)WHORL PULL	: 1000N
TENSILE FORCE	
(CABLE-CONNECT)	: 100N
TORSION(CABLE-CONNECT)	: 0.2N.m


1V. ENVIRONMENT

TEMP.RANGE	: -55°C TO +155°C
WEATHER STANDARD	: IEC 60068 55 / 155/ 56
THERMAL SHOCK	: US MIL-STD 202.METH.107,COND.B
VIBRATION	: US MIL-STD 202.METH.204,COND.B
SHOCK	: US MIL-STD 202.METH.213,COND.I

V. ASSEMBLY

: INNER CONDUCTOR SOLDERED AND OUTER CONDUCTOR CRIMPED

V1. ROHS COMPLIANT.

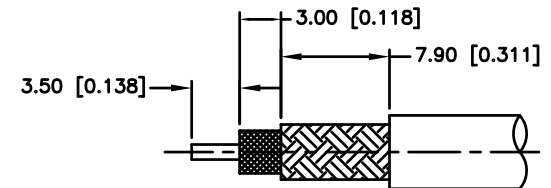

RECOMMENDED CABLE
STRIPPING DIM'S

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
					DRAWN	CLEMENT	07/14/10										
					CHECKED			PART DESCRIPTION									
6	INSULATOR	PTFE	NATURAL		1					7/16 CRIMP PLUG (FOR RG-58/U, 58C/U, LMR195 CABLE)							
5	GASKET	SILICONE RUBBER	NATURAL		1												
4	NUT	BRASS	WHITE BRONZE		1					PART NO.		272103					
3	TUBE	COPPER	WHITE BRONZE		1												
2	OUTER CONDUCTOR	BRASS	WHITE BRONZE		1												
1	INNER CONDUCTOR	SPRING COPPER/BRASS	SILVER		1												
DESCRIPTION		MATERIAL	FINISH		QTY	CAD FILE		C:/272/272103.DWG		DWG. NO.	272103.DWG		REV.	C	SIZE	A	SCALE

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru